

MESSRS. : \_\_\_\_\_

AGENT : \_\_\_\_\_

**SPECIFICAION  
OF  
PYROELECTRIC PASSIVE  
INFRARED SENSOR**


MODEL NO. : RE200G

PART NO. : \_\_\_\_\_

 **NIPPON CERAMIC CO., LTD.**

176-17 Hirooka, Tottori-shi, 689-1193 JAPAN  
TEL : +81-857-53-4666 FAX : +81-857-53-3532

| APPROVED BY | CHECKED BY | DRAWN BY |
|-------------|------------|----------|
|             |            |          |

|                       |                        |            |               |   |
|-----------------------|------------------------|------------|---------------|---|
| MODEL NO. :<br>RE200G | DRAWING NO.<br>0606143 | REV :<br>A | PAGE<br>1 / 8 | JUN., 6, 2014   |
| PART NO. :            |                        |            |               |  <b>NIPPON CERAMIC CO., LTD.</b> |

Scope

This specification describes a pyroelectric passive infrared sensor supplied by NIPPON CERAMIC CO.,LTD.

Type of sensor

Balanced differential(series opposed type.)

Physical configuration


- 1) Package : TO-5 metal can with dimensions shown in Figure 1-c (Ni-plated)
- 2) Element geometry : Two sensitive areas 2.3 mm long, 1.0 mm wide and spaced 1.0 mm apart.
- 3) Element orientation : See Figure 1-b
- 4) Lead configuration : See Figure 1-c,1-d

Electrical characteristics (at 25 (+/-) degC)

- 1) Circuit configuration : Three-terminal sensor with source follower  
See Figure 2
- 2) Operating voltage : 3 ~ 10 V dc (Rs: 470kohm)
- 3) Source voltage : 0.35 ~ 1.4 V (Vd: 5V, Vs: 470kohm)
- 4) Signal output : Min. 2.5 Vp-p (Typ. 4.0 Vp-p)

Signal output is measured at chopper frequency of 1 Hz when connected to the amplifier of gain 72.5 dB (at 1 Hz) and submitted to the emission of Infrared energy of 13 microW/cm<sup>2</sup> from 420 K Black Body.

See Figure 3

|                       |                            |                |                   |   |
|-----------------------|----------------------------|----------------|-------------------|---|
| MODEL NO. :<br>RE200G | DRAWING NO.<br><br>0606143 | REV :<br><br>A | PAGE<br><br>2 / 8 | JUN., 6, 2014   |
| PART NO. :            |                            |                |                   |  <b>NIPPON CERAMIC CO., LTD.</b> |

5) Noise output : Max. 250 mVp-p (Typ. 70 mVp-p)

Noise output shall be measured for 20 seconds when connected to the amplifier of gain 72.5 dB (at 1 Hz) and shut out from Infrared energy.

See Figure 3

6) Balance output : Max. 15 %

$$\left[ \frac{Bo}{|SA+SB|} \right] \leq 0.15$$

Bo : Balance output

SA : Signal output on Element A

SB : Signal output on Element B

Balance output is measured at chopper frequency of 1 Hz when connected to the amplifier of gain 72.5 dB (at 1 Hz) and submitted to the emission of Infrared energy of 13 microW/cm<sup>2</sup> from 420 K Black Body.

See Figure 3

7) Frequency response : 0.3 Hz to 3.0 Hz / (+/-) 10 dB


### Optical characteristics

1) Field of view : 138 ° from center of element on axis X  
 : 125 ° from center of element on axis Y  
 : See Figure 1-a

2) Filter substrate : Silicon

3) Cut on (5 %T ABS) : 5 (+/-) 1 microm

4) Transmission :  $\geq$  70 % average 8 to 13 microm

|                       |                        |            |               |  |
|-----------------------|------------------------|------------|---------------|--|
| MODEL NO. :<br>RE200G | DRAWING NO.<br>0606143 | REV :<br>A | PAGE<br>3 / 8 | JUN., 6, 2014  |
| PART NO. :            |                        |            |               |  NIPPON CERAMIC CO., LTD. |

### Environmental requirements

1) Operating temperature : -30 degC to +70 degC

2) Storage temperature : -40 degC to +80 degC

3) Relative humidity :


The sensor shall operate without increase in noise output when exposed to 90 ~ 95 % RH at 30 degC continuously.

4) Hermetic seal :

The sensor shall be sealed to withstand a vacuum of 21.28 kPa.

### RoHS compliance

This product conforms to the RoHS Directive in force at the date of issuance of this Specification Sheet.


|                       |                        |            |               |   |
|-----------------------|------------------------|------------|---------------|---|
| MODEL NO. :<br>RE200G | DRAWING NO.<br>0606143 | REV :<br>A | PAGE<br>4 / 8 | JUN., 6, 2014   |
| PART NO. :            |                        |            |               |  NIPON CERAMIC CO., LTD. |

**Configuration (Figure 1)**


**Field of view**  
(Figure 1-a)




**Top view**  
(Figure 1-b)

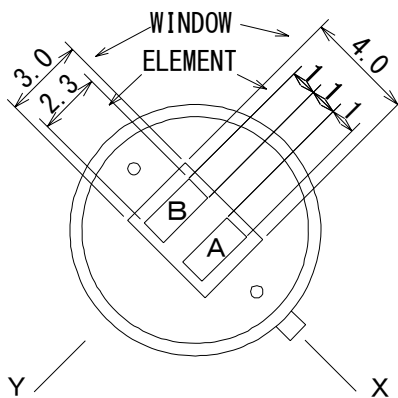

**Side view**  
(Figure 1-c)

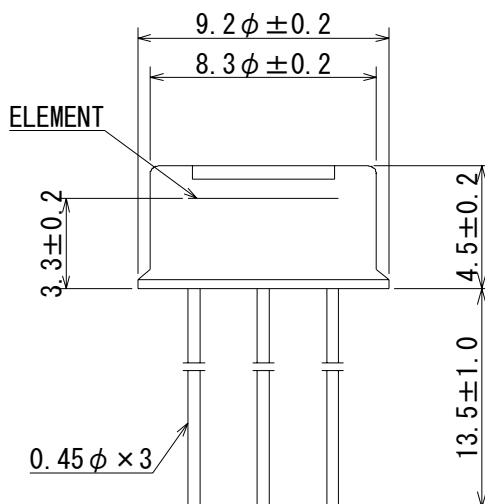

**Base view**  
(Figure 1-d)

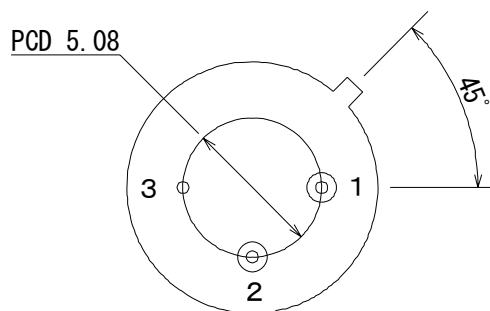


- 1: Drain
- 2: Source
- 3: Ground

unit : mm


|                       |                        |            |               |                          |
|-----------------------|------------------------|------------|---------------|--------------------------|
| MODEL NO. :<br>RE200G | DRAWING NO.<br>0606143 | REV :<br>A | PAGE<br>5 / 8 | JUN., 6, 2014            |
| PART NO. :            |                        |            |               | NIPPON CERAMIC CO., LTD. |

### Circuit configuration (Figure 2)

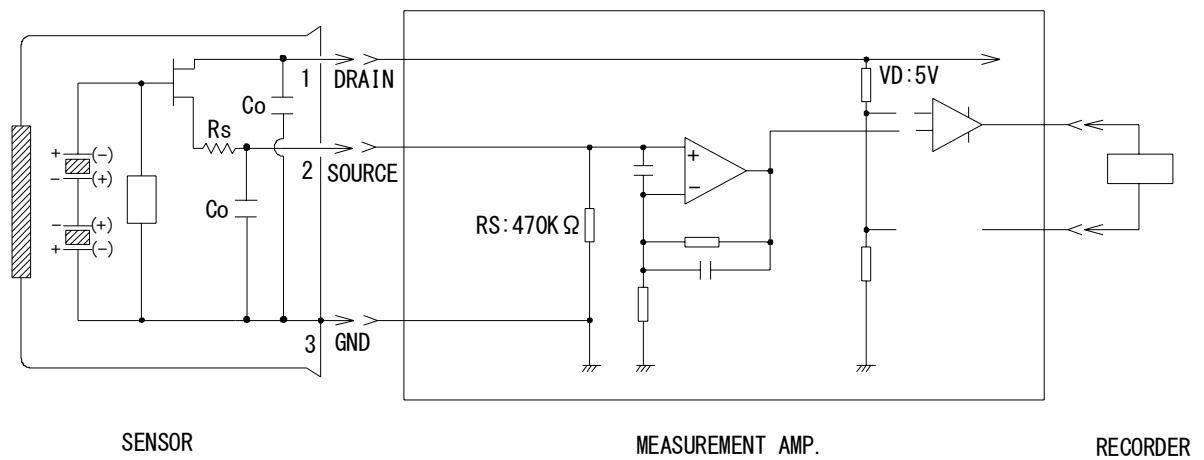



※ Measurement Amp.: Non-inverted type, gain 72.5 dB at 1 Hz , 0.4 to 2.7 Hz / -3 dB

### Test set-up block diagram (Figure 3)

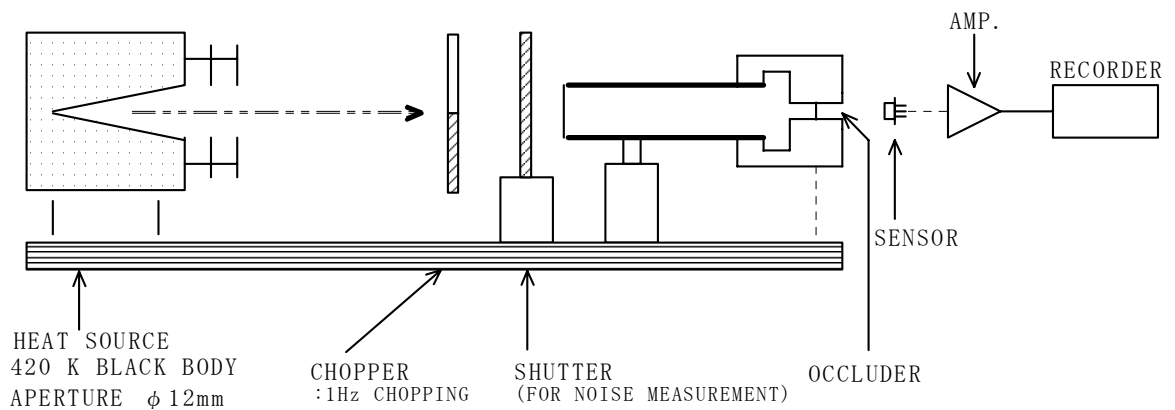

#### Occluder position

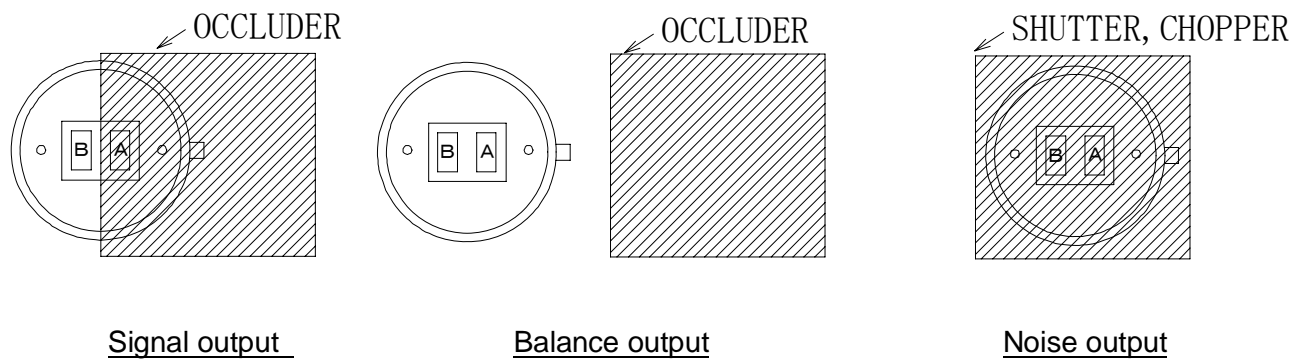

|                              |                               |                   |                      |   |
|------------------------------|-------------------------------|-------------------|----------------------|---|
| MODEL NO. :<br><b>RE200G</b> | DRAWING NO.<br><b>0606143</b> | REV :<br><b>A</b> | PAGE<br><b>6 / 8</b> | JUN., 6, 2014   |
| PART NO. :                   |                               |                   |                      |  <b>NIPPON CERAMIC CO., LTD.</b> |

## ※ Notes

### 1.Design restrictions/precautions

If used for outdoor applications, be sure to apply suitable supplementary optical filter and drip-proof, anti-dew construction. This sensor is designed for indoor use.

in cases where secondary accidents due to operation failure or malfunctions can be anticipated, add a fail safe function to the design.

### 2.Usage restrictions/precautions

To prevent sensor malfunctions, operational failure or any deterioration of its characteristics, do not use this sensor in the following, or similar, conditions.

- a. In rapid environmental temperature changes.
- b. In strong shock or vibration.
- c. In a place where there are obstructing materials (glass,fog,etc.) Through which Infrared rays cannot pass within detection area.
- d. In fluid, corrosive gases and sea breeze.
- e. Continual use in high humidity atmosphere.
- f. Exposed to direct sun light or headlights of automobiles.
- g. Exposed to direct wind from a heater or air conditioner.


### 3.Assembly restrictions/precautions

Soldering \_\_\_\_\_

- a. Use soldering irons when soldering.
- b. Avoid keeping pins of this sensor hot for a long time as excessive heat may cause deterioration of its quality.(e.g. within 5 sec. at 350 degC)

Washing \_\_\_\_\_

- a. Be sure to wash out all flux after soldering as remainder may cause malfunctions.
- b. Use a brush when washing. Washing with an ultrasonic cleaner may cause operational failure.

|                       |                            |                |                   |  |
|-----------------------|----------------------------|----------------|-------------------|--|
| MODEL NO. :<br>RE200G | DRAWING NO.<br><br>0606143 | REV :<br><br>A | PAGE<br><br>7 / 8 | JUN., 6, 2014  |
| PART NO. :            |                            |                |                   |  NIPPON CERAMIC CO., LTD. |

#### 4. Handling and storage restrictions / precautions


To prevent sensor malfunctions, operational failure, appearance damage or any deterioration of its characteristics, do not expose this sensor to the following or similar, handling and storage conditions.

- a. Vibration for a long time.
- b. Strong shock.
- c. Static electricity or strong electromagnetic waves.
- d. High temperature and humidity for a long time.
- e. Corrosive gases or sea breeze.
- f. Dirty and dusty environments that may contaminate the optical window.

#### 5. Restrictions on product use

The product described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sales are prohibited under any applicable laws and regulations.

Sensor troubles resulting from misuse, inappropriate handling or storage are not the manufacturer's responsibility.

|                       |                        |            |               |   |
|-----------------------|------------------------|------------|---------------|---|
| MODEL NO. :<br>RE200G | DRAWING NO.<br>0606143 | REV :<br>A | PAGE<br>8 / 8 | JUN., 6, 2014   |
| PART NO. :            |                        |            |               |  <b>NIPPON CERAMIC CO., LTD.</b> |