



# CATALOG









Novitronic AG  
CH-8050 Zürich  
Te.: +41 44 306 91 73  
[www.novitronic.ch/gb/powersupply](http://www.novitronic.ch/gb/powersupply)





# CONTENT

## Power supply and charging solutions

							
<b>INDUSTRIAL / I.T.E.</b> S.8	<b>MEDICAL</b> S.24	<b>FLUSH-MOUNTED</b> S.42	<b>OPEN FRAME</b> S.46	<b>CHARGERS</b> S.54	<b>BATTERY PACKS</b> S.66	<b>LED DRIVERS</b> S.76	<b>ACCESSORIES</b> S.86

<b>FRIWO</b>			
FRIWO develops the world's first AC adapter	4		
Pioneering spirit and innovational strength	6		
<b>INDUSTRIE / I.T.E.</b>	<b>8</b>		
FOX6-X, FOX12-X	10		
FOX18-X, FOX30-X	12		
FOX6-X-USB, FOX12-X-USB	14		
FOX6-F, FOX12-F	16		
FOX18-F, FOX30-F	18		
FOX5-F-USB, FOX6-F-USB, FOX12-F-USB	20		
DT12, FOX30-D, FOX60-D	22		
<b>MEDICAL</b>	<b>24</b>		
FOX6-XM, FOX12-XM	26		
FOX18-XM, FOX30-XM	28		
FOX6-XM-USB, FOX12-XM-USB	30		
FOX6-FM, FOX12-FM	32		
FOX18-FM, FOX30-FM	34		
FOX6-FM-USB, FOX12-FM-USB	36		
FOX30-DM, DT50-M	38		
DT80-M, DT150-M	40		
<b>FLUSH-MOUNTED</b>	<b>42</b>		
UP6, UP12/UP18, UP USB	44		
<b>OPEN FRAME</b>	<b>46</b>		
HERC18, HERC30, HERC175	48		
OF65, OF150	50		
OF250, OF450	52		
<b>CHARGES</b>	<b>54</b>		
Li-Ion GPP18, Li-Ion GPP36	56		
Li-Ion FOX50-C, Li-Ion FOX90-C, Li-Ion FOX160-C	58		
LiFeP04 GPP18, LiFeP04 GPP36	60		
NiCd/NiMH GPP18, NiCd/NiMH GPP36, Pb PP8	62		
<b>BUNDLE MATRIX</b>	<b>64</b>		
<b>BATTERY PACKS</b>	<b>66</b>		
1S1P, 1S2P, 2S1P	68		
3S1P, 3S2P, 4S1P, 4S2P	70		
5S1P, 5S2P, 7S1P, 7S2P10S3P	72		
8S1P, 10S3P	74		
<b>LED-DRIVERS</b>	<b>76</b>		
LT UP, LT10, LT20	78		
LT40, LT40 WP, LT DALI	80		
LT60, LT60 DPA, LT80	82		
LT100, DIMMbox, LS12	84		
<b>ACCESSORIES</b>	<b>86</b>		
Primary adapters FOX system,			
Primary adapters GPP system, Power cords	88		
Secondary adapter system, Protective covers for LED drivers	90		
<b>FRIWO ACADEMY</b>	<b>92</b>		
Those who can, do			
<b>GLOSSAR</b>	<b>94</b>		
<b>FRIWO WORLDWIDE / SALES</b>	<b>96</b>		
<b>NOTES</b>	<b>98</b>		



1882

**1882**

The idea that “sparked” it all: patenting of the Wolf’sche mine safety lamp for the mining industry.

**1884**

Heinrich Friemann and Carl Wolf establish the Friemann & Wolf machine and miner’s lamp factory in Zwickau, Saxony.

**1903**

Carl Wolf develops the first electric rotating gang lamp with a lead-acid battery.

**1907**

Redesign of the miner’s lamp with a nickel-cadmium battery. Testing at the Zeche Emscher-Lippe mine. Production of improved lead-acid batteries with solid electrolyte begins.

**1910**

Friemann & Wolf, now world-famous under the brand name FRIWO, begins licensed production of an improved NiCd battery and in-house development.

**1927**

FRIWO receives German imperial patent 446183 for the first electric mining cap lamp.

**1951**

Production of a silver-zinc battery system starts, and Silberkraft Leichtakkumulatoren GmbH in Rüdeshelm is founded (relocation to Duisburg in 1959).

**1963**

Expansion of NiCd battery production for stationary and mobile use. Production of security lighting and emergency power supply systems with individual, group and central batteries also increases. In-house development of silver-zinc and silver-cadmium batteries.



1971

### Friemann & Wolf becomes world-famous under the brand name FRIWO.

**1967**

Manufacturing of large-scale silver-zinc batteries begins.

**1971**

Friemann & Wolf Gerätebau GmbH founded in Duisburg, and the related acquisition of an electromechanical and electronics production plant in Ostbevern, where the company’s charger and power supply technology business begins.

**1971**

FRIWO develops and manufactures the world’s first AC adapter. It is used with a cassette recorder. A total of 1,000 devices are manufactured in the first week of production.

**1979**



The company extends its range of products to include power supply and charger modules for IT systems and peripheral devices.

**1982**

With a daily capacity of 25,000 plug-in power supply units, Friemann & Wolf Gerätebau GmbH becomes Europe’s largest manufacturer of small power supply systems and chargers. Production of charger modules and charging monitoring devices begins.

**1992**

FRIWO is the first company in the industry to be certified according to EN DIN ISO 9001.

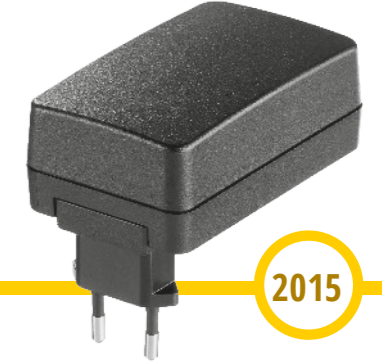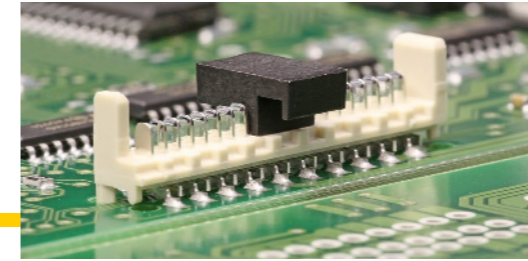

2015

## FRIWO DEVELOPS THE WORLD’S FIRST AC ADAPTER

**1993**

FRIWO is the first company to produce a charger for environmentally friendly NiMH batteries.

**2005**

FRIWO produces its billionth charger.

**2010**

FRIWO expands its product portfolio and offers high-quality LED drivers and light control solutions “Made in Germany”.

**2013**

FRIWO exceeds the revenue threshold of 100 million euros.

**2014**

The company starts the production of battery packs and acts as system supplier for charging and battery technology with solutions from one source. Moreover FRIWO develops www.friwo-shop.com, its own online B2B store. In particular, it allows customers to order small quantities of devices from the company’s standard portfolio, easily and directly.

**New standards in power supply technology: FRIWO launches the FOX product family.**

**2015**

New standards in power supply: FRIWO launches the FOX product family, which combines extremely high efficiency with almost no loss of power in standby mode.

**2016**

FRIWO opens an own, ultra-modern production facility in Ho Chi Minh City, Vietnam.

**2017**

FRIWO acquires production of transformers and chokes in Vietnam. The headcount increases to more than 1,500 employees.






Particular emphasis is placed on product quality: high-class power supply and charging solutions.

## PIONEERING SPIRIT AND INNOVATIONAL STRENGTH

**The benchmark for tomorrow is the benchmark for today: prepared for the future.**

**FRIWO** has a pioneering spirit and embodies the power of innovation and German engineering expertise. This dynamic company boasts a global network of experts. With modern development centers, manufacturing facilities and sales locations in Europe, Asia and North America, FRIWO is present in all of the world's most important markets.

**The company's portfolio** includes standard and custom power supply and charging solutions. It sells power supply units and chargers, drivers and dimmer solutions for LED technology, as well as a full range of accessories, from primary and secondary adapters to power cords and protective covers for LED drivers.



**As part of its program of expansion, FRIWO recently established its Battery Business division.** It produces battery packs carrying the "Made in Germany" label and allows FRIWO to offer complete mobile power supply solutions, from the charger to the battery, from a single source.

For FRIWO, **this development also represents** a return to its roots. Few other companies can match its experience in this technological field. It began manufacturing nickel-cadmium and lead-acid batteries in the early 20th century and, in 1971, developed the world's first AC adapter.

**The company's high quality standards are impressively demonstrated** by its expertise in medical technology. There are few other fields in which reliable product safety, durability and resilience are as essential.

**FRIWO is also constantly working to build on those high quality standards,** so that it can meet the needs of the future today. For example, the FOX product family already exceeded the U.S. Department of Energy's efficiency standards, which have been binding in the United States since 2016, well in advance. This long-term approach means that the company is prepared for whatever the future may hold.

**An optimized logistics and manufacturing concept** allows FRIWO to ensure maximum product availability. Rapid delivery times are achieved through the systematic configuration of product variants. And FRIWO works with selected partners to offer tooling and development services (E<sup>2</sup>MS).





Industrial / I.T.E.

# LOOKING TO THE FUTURE

Many applications, whether static or mobile, today require a safe and reliable power supply. FRIWO's I.T.E. (information technology equipment) power supply units have always set standards. And the new, next-generation FOX platform allows the company to exceed the high quality standards that its customers have come to expect. FOX power supply units are smaller, more powerful and more efficient than their predecessors. FRIWO's new technical concept has again increased energy density. Thanks to a patented interchangeable adapter system, its devices are suitable for use under the toughest conditions and in the harshest environments. New: the optional IP42 adapter from FRIWO is an interchangeable adapter system that offers additional protection for use in damp environments.

Minimal leakage current means that FRIWO's power supply units are also ideally suited for use with measurement technologies, because they prevent unwanted influences that distort measured values. The FOX product family meets the U.S. Department of Energy's stringent 2016 DOE energy-efficiency standards, which include stricter requirements regarding the efficiency and standby loss of power supply units. The harmonization of European thresholds with the U.S. standard is currently under discussion. As a result, FRIWO already offers devices that exceed future statutory requirements, ensuring the worldwide use of your application. Choosing FOX today is an investment in the future, offering security tomorrow and beyond.

A further increase in energy density.  
Because FRIWO can.



Requirements:  
exceeded!  
Technical  
concept:  
unsurpassed!

## Switchmode power supplies

**INDUSTRIAL / I. T. E.**

with interchangeable adapter system.

All products are IEC 60950 approved.

## Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

## Technical data

Input voltage	100 – 240 V ± 10 %
Frequency	50 – 60 Hz
Input current	160 – 80 mA (FOX6-X), 300 – 150 mA (FOX12-X)
Leakage current	≤ 10 µA (FOX6-X), ≤ 200 µA (FOX12-X)
Output voltage tolerance	± 5 %
Turn-on delay	≤ 3 s
Stand-by	≤ 0.1 W
Efficiency (typ. full load)	≥ 80 % (FOX6-X), ≥ 83 % (FOX12-X)
MTBF	200.000 h*

## Environmental specifications

Operating temperature	0 – 45° C (FOX6-X)
Humidity	10 – 95 %
Storage temperature	-40 – 70° C
Operating altitude	2000 m

## Safety specifications


Layout acc. to safety standard	IEC 60950, IEC 60065, IEC 60335-1, IEC 62368-1
Approvals	EU, USA, AUS, JPN
Safety class	II
EMC	EN 55024, EN 55032

## Mechanical data

Dimensions	55.0 x 31.5 x 41.0 mm (FOX6-X), 75.0 x 31.5 x 41.0 mm (FOX12-X)
Weight	112 g (FOX6-X), 127 g (FOX12-X)
Connectors	AC input: Interchangeable primary adapter system DC output: Secondary adapter system

**FOX6-X**

FW8002

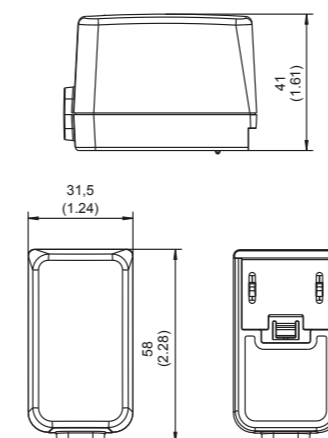


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	1400 mA	180 mV pp	1898106
5.9 V	1200 mA	150 mV pp	1898107
7.5 V	800 mA	150 mV pp	1898108
9 V	800 mA	150 mV pp	1898109
12 V	600 mA	200 mV pp	1898110
15 V	500 mA	200 mV pp	1898111
18 V	400 mA	180 mV pp	1898112
24 V	300 mA	240 mV pp	1898113
48 V	125 mA	480 mV pp	1898114

**FOX12-X**

FW8000

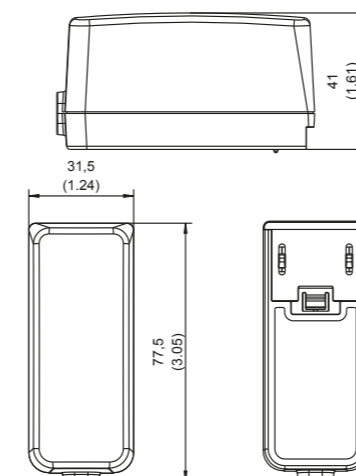

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	2000 mA	100 mV pp	1898115
5.9 V	2000 mA	100 mV pp	1898116
7.5 V	1400 mA	100 mV pp	1898117
9 V	1300 mA	100 mV pp	1898118
12 V	1000 mA	100 mV pp	1897510
15 V	800 mA	100 mV pp	1898120
18 V	660 mA	100 mV pp	1898121
24 V	500 mA	100 mV pp	1898122
48 V	250 mA	150 mV pp	1898123

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz &amp; 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



## Switchmode power supplies

**INDUSTRIAL / I. T. E.**

with interchangeable adapter system.

All products are IEC 60950 approved.

## Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

## Technical data

Input voltage	100 – 240 V ± 10 %
Frequency	50 – 60 Hz
Input current	400 – 200 mA (FOX18-X), 600 – 300 mA (FOX30-X)
Leakage current	≤ 10 µA
Output voltage tolerance	± 5 %
Turn-on delay	≤ 1 s (FOX18-X), ≤ 3 s (FOX30-X)
Stand-by	≤ 0.1 W
Efficiency (typ. full load)	≥ 86 % (FOX18-X), ≥ 87 % (FOX30-X)
MTBF	200.000 h*

## Environmental specifications

Operating temperature	0 – 50° C (FOX18-X), 0 – 45° C (FOX30-X)
Humidity	10 – 95 %
Storage temperature	-40 – 70° C
Operating altitude	2000 m

## Safety specifications


Layout acc. to safety standard	IEC 60950
Approvals	EU, USA, AUS, JPN
Safety class	II
EMC	EN 55024, EN 55032

## Mechanical data

Dimensions	77.0 x 50.0 x 34.0 mm (FOX18-X), 90.0 x 55.0 x 34.0 mm (FOX30-X)
Weight	157 g (FOX18-X), 187 g (FOX30-X)
Connectors	AC input: Interchangeable primary adapter system DC output: Secondary adapter system

**FOX18-X**

FW8001

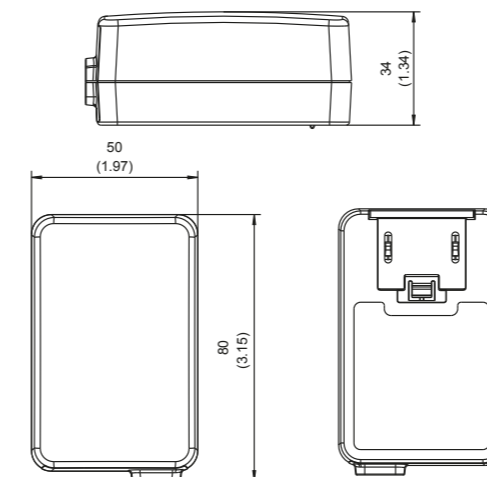


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	3000 mA	150 mV pp	1898142
5.9 V	3000 mA	120 mV pp	1898143
7.5 V	2400 mA	120 mV pp	1898144
9 V	2000 mA	120 mV pp	1898145
12 V	1500 mA	120 mV pp	1898146
15 V	1200 mA	150 mV pp	1898147
18 V	1000 mA	180 mV pp	1898148
24 V	750 mA	180 mV pp	1898149
48 V	375 mA	200 mV pp	1898150

**FOX30-X**

FW8030

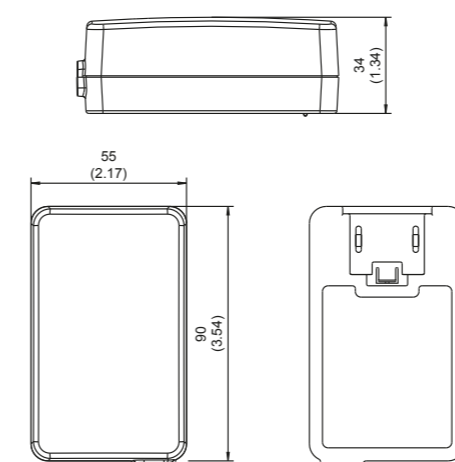

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5.9 V	5000 mA	150 mV pp	1898151
6 V	4200 mA	150 mV pp	1898152
7.5 V	4000 mA	150 mV pp	1898153
9 V	3300 mA	120 mV pp	1898154
12 V	2500 mA	120 mV pp	1898155
15 V	2000 mA	150 mV pp	1898156
18 V	1670 mA	200 mV pp	1898157
24 V	1250 mA	200 mV pp	1898158
48 V	625 mA	300 mV pp	1898159

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz &amp; 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	120 mA (Article no. 1898582), 160 – 80 mA (Article no. 1897843), 300 – 150 mA (Article no. 1897730)
<b>Leakage current</b>	≤ 10 µA (FOX6-X-USB), ≤ 90 µA (FOX12-X-USB)
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 2 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 76 % (FOX6-X-USB), ≥ 80 % (FOX12-X-USB)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 45° C
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m (Article no. 1897843, 1897730, 1899496), 4000 m (Article no. 1898582)

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60950
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032

### Mechanical data

<b>Dimensions</b>	55.0 x 31.5 x 41.0 mm (FOX6-X-USB), 75.0 x 31.5 x 41.0 mm (FOX12-X-USB)
<b>Weight</b>	50 g (FOX6-X-USB), 65 g (FOX12-X-USB)
<b>Connectors</b>	AC input: Interchangeable primary adapter system DC output: USB socket type A

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies



# INDUSTRIAL / I. T. E.

with interchangeable adapter system.

All products are IEC 60950 approved.

## FOX6-X-USB

FW8002/USB

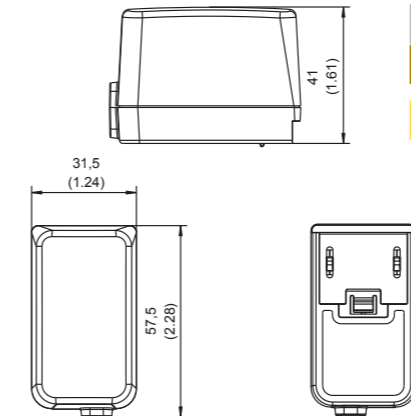
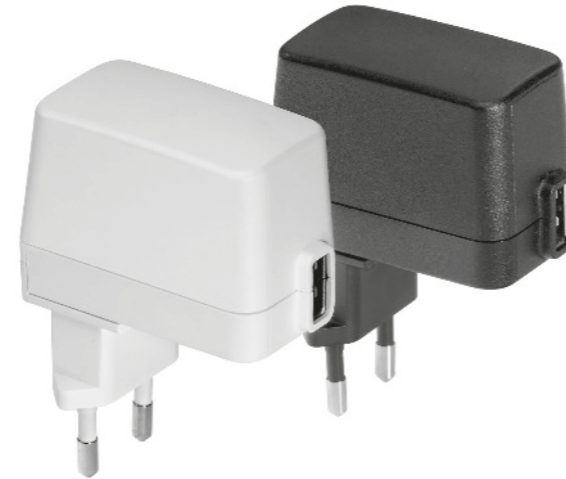


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			white	black
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>1400 mA</b>	<b>80 mV pp</b>	<b>1899496</b>	<b>1897843</b>
<b>5 V</b>	<b>1000 mA</b>	<b>80 mV pp</b>	–	<b>1898582</b>

## FOX12-X-USB

FW8000/USB

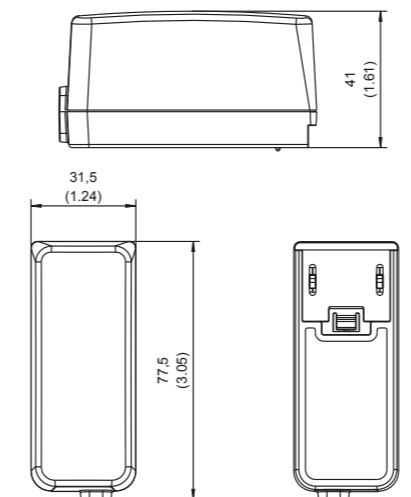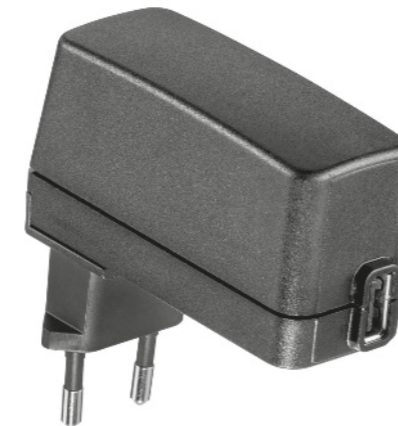

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
<b>5 V</b>	<b>2200 mA</b>	<b>80 mV pp</b>	<b>1897730</b>





Switchmode power supplies

# INDUSTRIAL / I. T. E.

with fixed AC plug.

All products conform to IEC 60950.

**Characteristics**

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

**Technical data**

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	160 – 80 mA (FOX6-F), 300 – 150 mA (FOX12-F)
<b>Leakage current</b>	≤ 10 µA (FOX6-F), ≤ 200 µA (FOX12-F)
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 3 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 80 % (FOX6-F), ≥ 83 % (FOX12-F)
<b>MTBF</b>	200.000 h*

**Environmental specifications**

<b>Operating temperature</b>	0 – 45° C (FOX6-F), 0 – 40° C (FOX12-F)
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m


**Safety specifications**

<b>Layout acc. to safety standard</b>	IEC 60950, IEC 60065, IEC 60335-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032


**Mechanical data**

<b>Dimensions</b>	55,0 x 31,5 x 41,0 mm (FOX6-F), 75,0 x 31,5 x 41,0 mm (FOX12-F)
<b>Weight</b>	114 g (FOX6-F USA/Japan), 119 g (FOX6-F EURO), 130 g (FOX12-F USA/Japan), 134 g (FOX12-F AUS), 135 g (FOX12-F EURO), 143 g (FOX12-F UK)
<b>Connectors</b>	AC input: See article no. DC output: Secondary adapter system

## FOX6-F

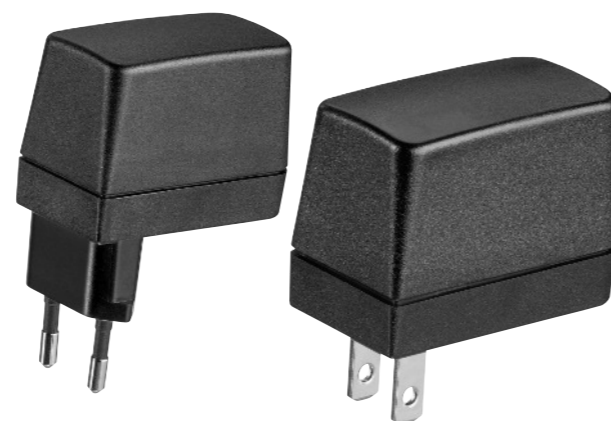

FW8002

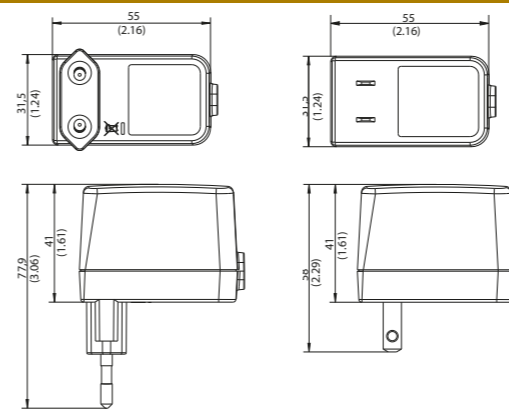


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)




Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
5 V	1400 mA	180 mV pp	1898721	1898730
5.9 V	1200 mA	150 mV pp	1898722	1898731
7.5 V	800 mA	150 mV pp	1898723	1898732
9 V	800 mA	150 mV pp	1898724	1898733
12 V	600 mA	200 mV pp	1898725	1898734
15 V	500 mA	200 mV pp	1898726	1898735
18 V	400 mA	180 mV pp	1898727	1898736
24 V	300 mA	240 mV pp	1898728	1898737
48 V	150 mA	480 mV pp	1898729	1898738

## FOX12-F

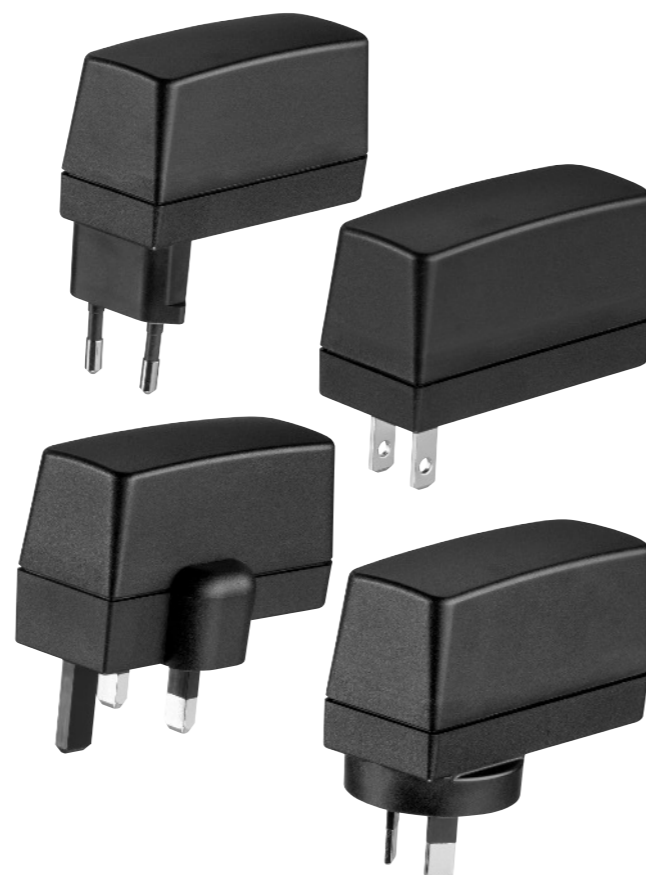

FW8000

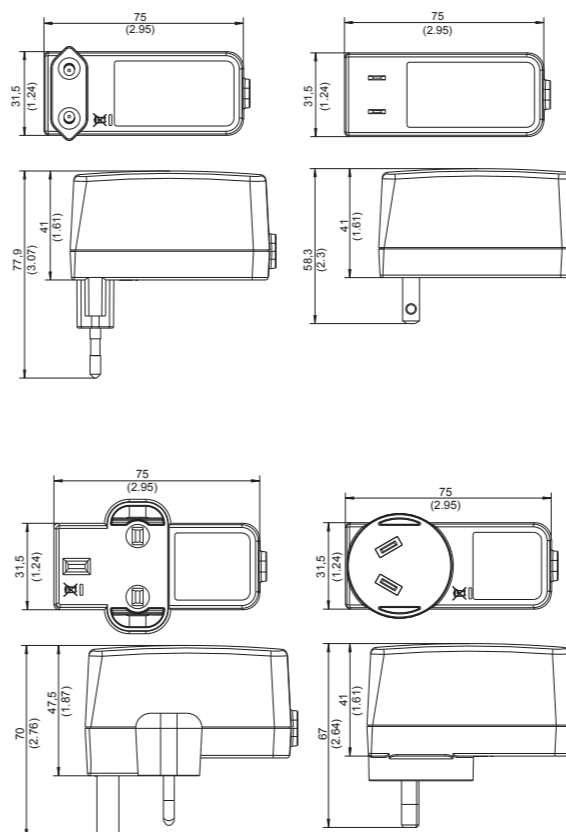

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			EURO	USA/Japan	UK	AUS
Voltage	Current	Ripple voltage	Article no.	Article no.	Article no.	Article no.
5 V	2000 mA	100 mV pp	1898758	1898767	1898831	1898840
5.9 V	2000 mA	100 mV pp	1898759	1898768	1898832	1898841
7.5 V	1400 mA	100 mV pp	1898760	1898769	1898833	1898842
9 V	1300 mA	100 mV pp	1898761	1898770	1898834	1898843
12 V	1000 mA	100 mV pp	1898762	1898771	1898835	1898844
15 V	800 mA	100 mV pp	1898763	1898772	1898836	1898845
18 V	660 mA	100 mV pp	1898764	1898773	1898837	1898846
24 V	500 mA	100 mV pp	1898765	1898774	1898838	1898847
48 V	250 mA	150 mV pp	1898766	1898775	1898839	1898848

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	400 – 200 mA (FOX18-F), 600 – 300 mA (FOX30-F)
<b>Leakage current</b>	≤ 10 µA
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 1 s (FOX18-F), ≤ 2 s (FOX30-F)
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 86 % (FOX18-F), ≥ 87 % (FOX30-F)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 50° C (FOX18-F), 0 – 45° C (FOX30-F)
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60950, IEC 60065, IEC 60335-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032

### Mechanical data

<b>Dimensions</b>	77.0 x 50.0 x 34.0 mm (FOX18-F), 90.0 x 55.0 x 34.0 mm (FOX30-F)
<b>Weight</b>	164 g (FOX18-F USA/Japan), 166 g (FOX18-F EURO), 193 g (FOX30-F USA/Japan), 195 g (FOX30-F EURO)
<b>Connectors</b>	AC input: See article no. DC output: Secondary adapter system

## Switchmode power supplies


# INDUSTRIAL / I. T. E.

with fixed AC plug.

All products conform to IEC 60950.

## FOX18-F

FW8001

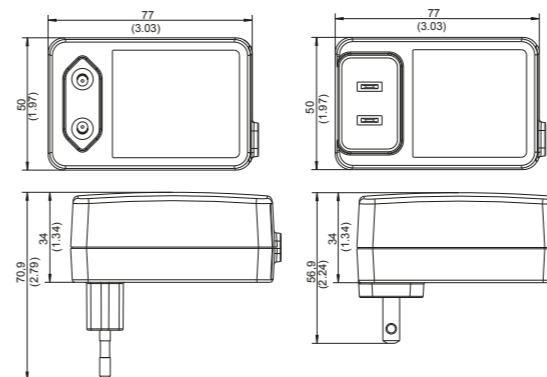


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>3000 mA</b>	<b>150 mV pp</b>	<b>1898877</b>	<b>1898886</b>
<b>5.9 V</b>	<b>3000 mA</b>	<b>120 mV pp</b>	<b>1898878</b>	<b>1898887</b>
<b>7.5 V</b>	<b>2400 mA</b>	<b>120 mV pp</b>	<b>1898879</b>	<b>1898888</b>
<b>9 V</b>	<b>2000 mA</b>	<b>120 mV pp</b>	<b>1898880</b>	<b>1898889</b>
<b>12 V</b>	<b>1500 mA</b>	<b>120 mV pp</b>	<b>1898881</b>	<b>1898890</b>
<b>15 V</b>	<b>1200 mA</b>	<b>150 mV pp</b>	<b>1898882</b>	<b>1898891</b>
<b>18 V</b>	<b>1000 mA</b>	<b>180 mV pp</b>	<b>1898883</b>	<b>1898892</b>
<b>24 V</b>	<b>750 mA</b>	<b>180 mV pp</b>	<b>1898884</b>	<b>1898893</b>
<b>48 V</b>	<b>375 mA</b>	<b>200 mV pp</b>	<b>1898885</b>	<b>1898894</b>

## FOX30-F

FW8030

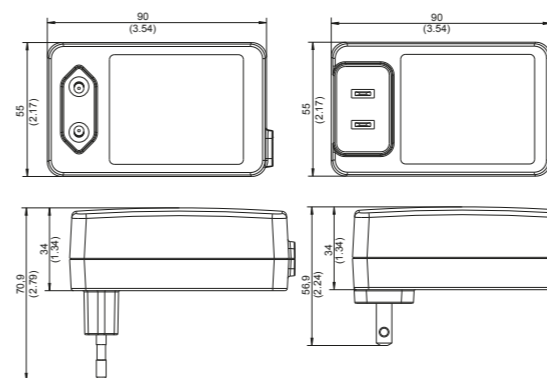

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>5000 mA</b>	<b>150 mV pp</b>	<b>1898795</b>	<b>1898804</b>
<b>5.9 V</b>	<b>4200 mA</b>	<b>150 mV pp</b>	<b>1898796</b>	<b>1898805</b>
<b>7.5 V</b>	<b>4000 mA</b>	<b>150 mV pp</b>	<b>1898797</b>	<b>1898806</b>
<b>9 V</b>	<b>3300 mA</b>	<b>120 mV pp</b>	<b>1898798</b>	<b>1898807</b>
<b>12 V</b>	<b>2500 mA</b>	<b>120 mV pp</b>	<b>1898799</b>	<b>1898808</b>
<b>15 V</b>	<b>2000 mA</b>	<b>150 mV pp</b>	<b>1898800</b>	<b>1898809</b>
<b>18 V</b>	<b>1670 mA</b>	<b>200 mV pp</b>	<b>1898801</b>	<b>1898810</b>
<b>24 V</b>	<b>1250 mA</b>	<b>200 mV pp</b>	<b>1898802</b>	<b>1898811</b>
<b>48 V</b>	<b>625 mA</b>	<b>300 mV pp</b>	<b>1898803</b>	<b>1898812</b>

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	150 mA (FOX5-F-USB), 160 – 80 mA (FOX6-F-USB), 300 – 150 mA (FOX12-F-USB)
<b>Leakage current</b>	≤ 10 µA (FOX5-F-USB, FOX6-F-USB), ≤ 250 µA (FOX12-F-USB)
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 2 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 74 % (FOX5-F-USB), ≥ 76 % (FOX6-F-USB), ≥ 79 % (FOX12-F-USB)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 40° C (FOX5-F-USB), 0 – 45° C (FOX6-F-USB, FOX12-F-USB)
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-20 – 70° C (FOX5-F-USB), -40 – 70° C (FOX6-F-USB, FOX12-F-USB)
<b>Operating altitude</b>	2000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60950, IEC 60065, IEC 60335-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032

### Mechanical data

<b>Dimensions</b>	40,0 x 65,0 x 18,0 mm (FOX 5-F-USB), 55,0 x 31,5 x 41,0 mm (FOX 6-F-USB), 75,0 x 31,5 x 41,0 mm (FOX 12-F-USB)
<b>Weight</b>	25 g (FOX5-F-USB), 52 g (FOX6-F-USB USA/Japan), 57 g (FOX6-F-USB EURO), 68 g (FOX12-F-USB USA/Japan), 72 g (FOX12-F-USB AUS), 73 g (FOX12-F-USB EURO), 81 g (FOX12-F-USB UK)
<b>Connectors</b>	AC input: See article no. DC output: USB socket type A

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies


# INDUSTRIAL / I. T. E.

with fixed AC plug.

All products conform to IEC 60950.

## FOX5-F-USB

FW8005


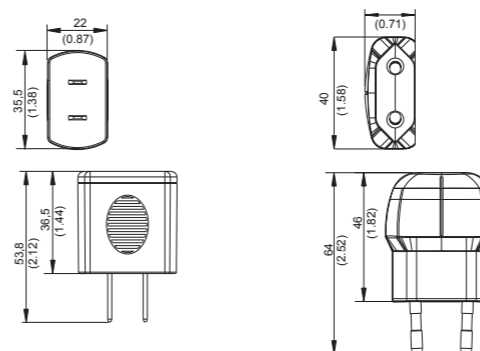


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data				white	black
Voltage	Current	Ripple voltage	Country	Article no.	Article no.
5 V	1100 mA	80 mV pp	EURO	1899018	1897974
5 V	1000 mA	80 mV pp	USA / Japan	1899017	1898333

## FOX6-F-USB

FW8002/USB

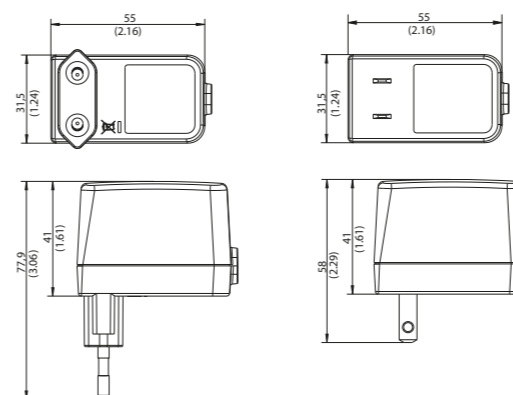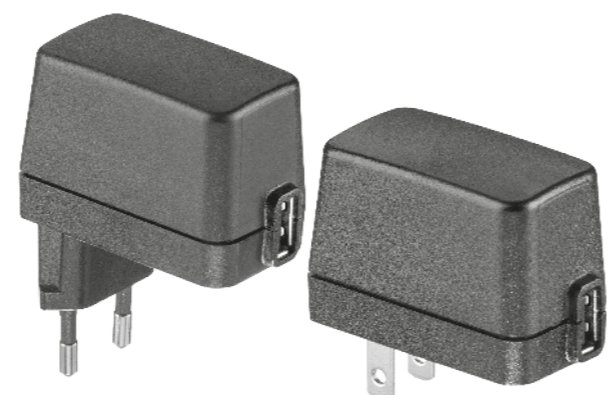


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
5 V	1000 mA	80 mV pp	1898875	1898876
5 V	1400 mA	80 mV pp	1898867	1898868

## FOX12-F-USB

FW8000/USB

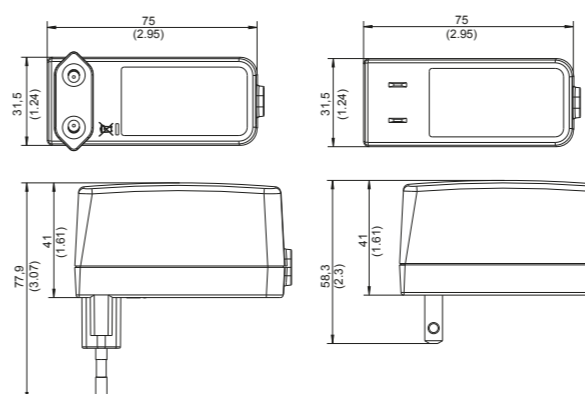

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			EURO	USA/Japan	UK	AUS
Voltage	Current	Ripple voltage	Article no.	Article no.	Article no.	Article no.
5 V	2200 mA	80 mV pp	1898895	1898896	1898897	1898898



Switchmode power supplies

# INDUSTRIAL / I. T. E.

Desktop

All products conform to IEC 60950.

Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

Technical data

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	300 mA (DT12), 300 – 600 mA (FOX30-D), 1300 mA (FOX60-D)
<b>Leakage current</b>	≤ 10 µA (FOX30-D), ≤ 250 µA (DT12, FOX60-D)
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 3 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 87 % (DT12, FOX30-D), ≥ 88 % (FOX60-D)
<b>MTBF</b>	200.000 h*

Environmental specifications

<b>Operating temperature</b>	0 – 45° C (FOX30-D), 0 – 40° C (DT12, FOX60-D)
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C (FOX30-D), -10 – 70° C (DT12, FOX60-D)
<b>Operating altitude</b>	2000 m

Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60950, IEC 60335, IEC 60065
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032

Mechanical data

<b>Dimensions</b>	40.0 x 92.0 x 27.5 mm (DT12), 90.0 x 55.0 x 32.0 mm (FOX30-D), 114.5 x 49.5 x 33.0 mm (FOX60-D)
<b>Weight</b>	135 g (DT12), 187 g (FOX30-D), 250 g (FOX60-D)
<b>Connectors</b>	AC input: 2 pole, IEC 60320-C8 socket DC output: Secondary adapter system

Please find adapters and accessories on page 86.


For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## DT12



FW7402

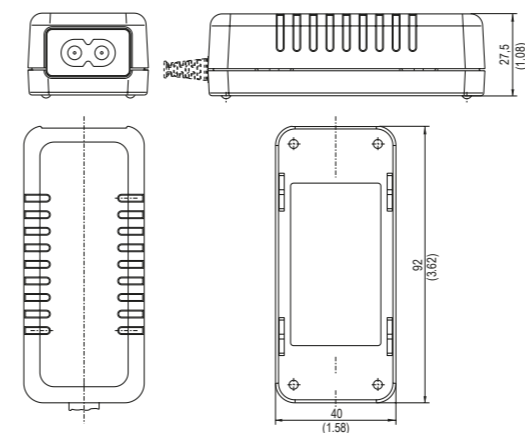

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)




Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	2000 mA	200 mV pp	1898975
5.9 V	1700 mA	200 mV pp	1898976
7.5 V	1400 mA	200 mV pp	1898977
9 V	1200 mA	180 mV pp	1898978
12 V	1000 mA	180 mV pp	1898757
15 V	800 mA	150 mV pp	1898979
18 V	660 mA	180 mV pp	1898980
24 V	500 mA	120 mV pp	1898981

## FOX30-D



FW8030/DT

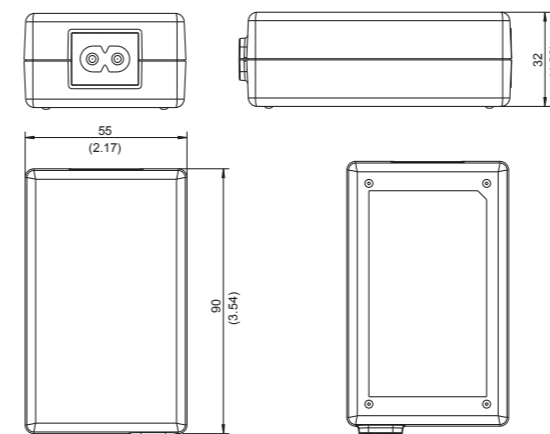

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)




Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	5000 mA	150 mV pp	1898169
5.9 V	4200 mA	150 mV pp	1898170
7.5 V	4000 mA	150 mV pp	1898171
9 V	3300 mA	120 mV pp	1898172
12 V	2500 mA	120 mV pp	1898173
15 V	2000 mA	150 mV pp	1898174
18 V	1670 mA	200 mV pp	1898175
24 V	1250 mA	200 mV pp	1898177
48 V	625 mA	300 mV pp	1898178

## FOX60-D




FW8060

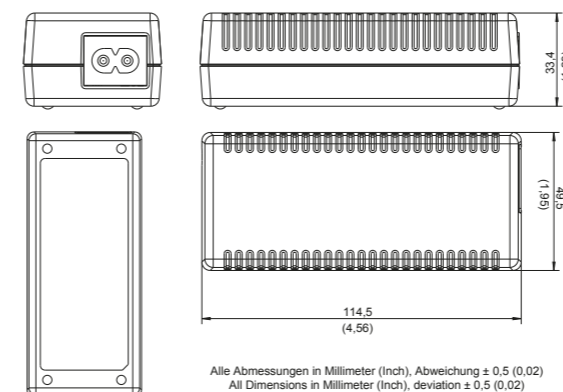

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
12 V	5000 mA	240 mV pp	1898544
15 V	4000 mA	240 mV pp	1898545
18 V	3300 mA	240 mV pp	1898546
24 V	2500 mA	240 mV pp	1898547
48 V	1250 mA	480 mV pp	1898548

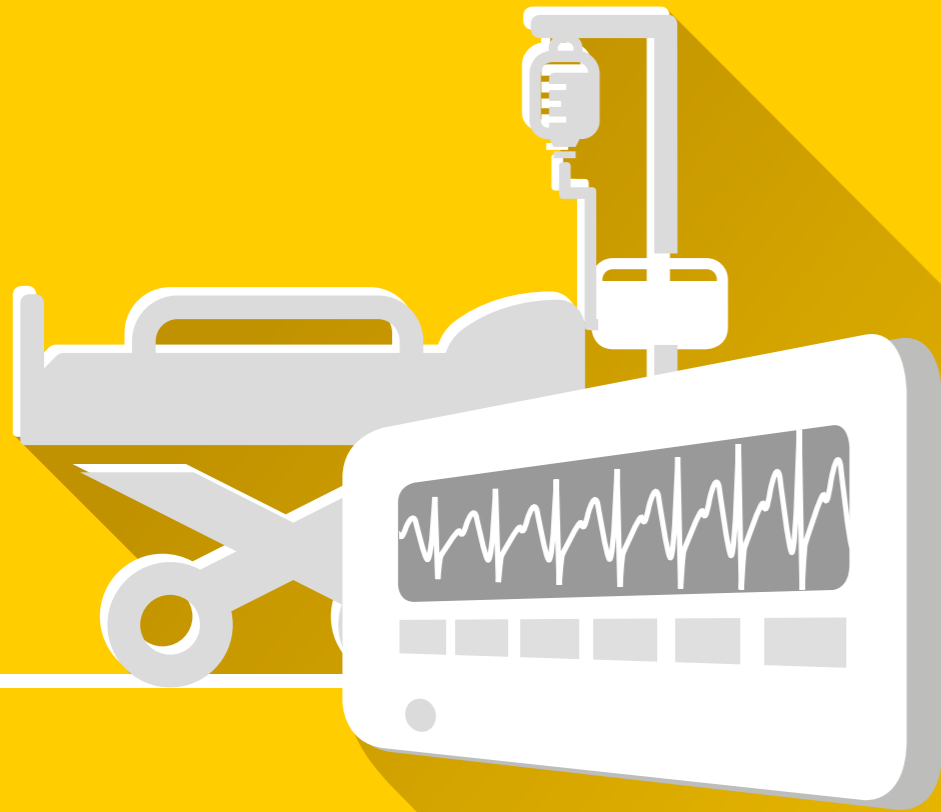

Power supply  
units you can  
trust: Robust.  
Safe. Durable.

## Medical

# DIAGNOSIS: MAXIMUM SAFETY

Power pack: That description applies doubly to FRIWO's power supply units for medical technology. Its product range sets standards in terms of performance and durability, because maximum safety for patients and medical staff is all that counts.

FRIWO's medical products are designed for the most sensitive applications and for use under the harshest conditions. They must continue to work perfectly despite falls in the emergency room while protecting patients by offering the lowest possible levels of leakage current. FRIWO develops and manufactures power supply units you can trust. In order to ensure maximum patient safety, FRIWO medical technology devices are equipped with its 2 x MOPP (Means of Patient Protection) safety system and feature a minimal leakage current of  $\leq 10 \mu\text{A}$  as well as double-sealed casings. What is more, FRIWO's power supply solutions already meet the stricter requirements of the 4th edition of IEC 60601-1-2.

A particular highlight of the FOX product family is its interchangeable adapter system with IP42 protection (against drops of water and dampness), which is available as an optional accessory. In practice, this means that the devices can be cleaned using wet cloths – an invaluable advantage in sterile environments. FRIWO's additional features make its products easier to use, day in, day out.

On the safe side, despite increasing regulatory requirements: The FOX product family already meets the U.S. Department of Energy's stringent 2016 DOE efficiency standards for medical applications, even though this segment is not currently covered by the regulation. Along with the extremely high efficiency of the devices, this applies to low standby loss of  $\leq 0.09 \text{ W}$  in particular. Choosing FOX today is an investment in the future, offering security tomorrow and beyond.



High performing, rugged, and  
simply capable.





### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	160 – 80 mA (FOX6-XM), 300 – 150 mA (FOX12-XM)
<b>Leakage current</b>	≤ 10 µA
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 2 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 80 % (FOX6-XM), ≥ 83 % (FOX12-XM)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 45° C
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	3000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60601-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032, EN 60601-1-2
<b>Medical protection</b>	2 x MOPP

### Mechanical data

<b>Dimensions</b>	55.0 x 31.5 x 41.0 mm (FOX6-XM), 75.0 x 31.5 x 41.0 mm (FOX12-XM)
<b>Weight</b>	112 g (FOX6-XM), 127 g (FOX12-XM)
<b>Connectors</b>	AC input: Interchangeable primary adapter system DC output: Secondary adapter system

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies


# MEDICAL

with interchangeable adapter system.

All products are IEC 60601-1 approved and conform to IEC60601-1-2 4th edition.

## FOX6-XM

FW8002M

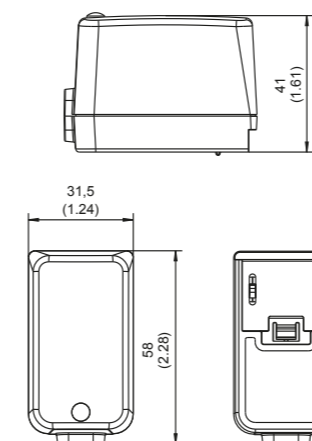


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	1400 mA	180 mV pp	1898096
5.9 V	1200 mA	150 mV pp	1898097
7.5 V	800 mA	150 mV pp	1898098
9 V	800 mA	150 mV pp	1898099
12 V	600 mA	200 mV pp	1898100
15 V	500 mA	200 mV pp	1898101
18 V	400 mA	180 mV pp	1898102
24 V	300 mA	240 mV pp	1898103
48 V	150 mA	480 mV pp	1898105

## FOX12-XM

FW8000M

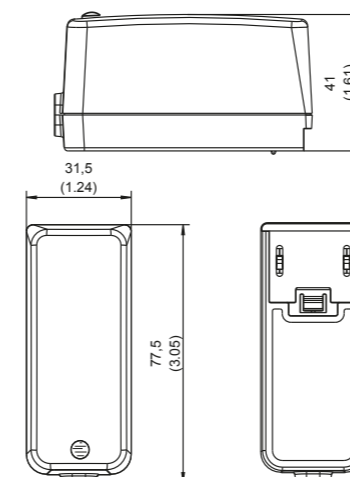

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	2200 mA	150 mV pp	1898124
5.9 V	2000 mA	150 mV pp	1898125
7.5 V	1400 mA	150 mV pp	1898126
9 V	1300 mA	150 mV pp	1898127
12 V	1000 mA	150 mV pp	1898128
15 V	800 mA	150 mV pp	1898129
18 V	660 mA	180 mV pp	1898130
24 V	500 mA	240 mV pp	1898131
48 V	250 mA	480 mV pp	1898132



### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	400 – 200 mA (FOX18-XM), 600 – 300 mA (FOX30-XM)
<b>Leakage current</b>	≤ 10 µA
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 1 s (FOX18-XM), ≤ 3 s (FOX30-XM)
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 86 % (FOX18-XM), ≥ 87 % (FOX30-XM)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 50° C (FOX18-XM), 0 – 45° C (FOX30-XM)
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	3000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60601-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032, EN 60601-1-2
<b>Medical protection</b>	2 x MOPP


### Mechanical data

<b>Dimensions</b>	77.0 x 50.0 x 34.0 mm (FOX18-XM), 90.0 x 55.0 x 34.0 mm (FOX30-XM)
<b>Weight</b>	157 g (FOX18-XM), 187 g (FOX30-XM)
<b>Connectors</b>	AC input: Interchangeable primary adapter system DC output: Secondary adapter system

## FOX18-XM



FW8001M

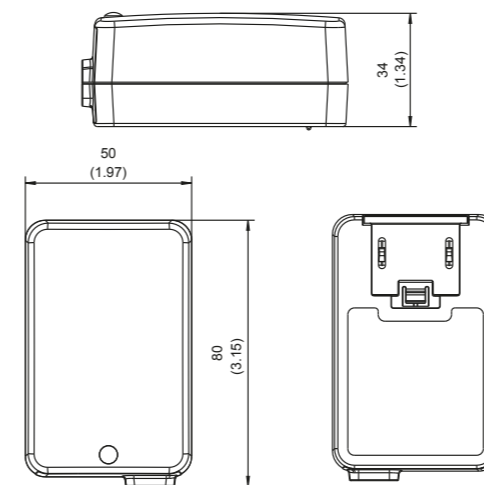

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)




Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
<b>5 V</b>	<b>3000 mA</b>	<b>150 mV pp</b>	<b>1898133</b>
<b>5.9 V</b>	<b>3000 mA</b>	<b>120 mV pp</b>	<b>1898134</b>
<b>7.5 V</b>	<b>2400 mA</b>	<b>120 mV pp</b>	<b>1898135</b>
<b>9 V</b>	<b>2000 mA</b>	<b>120 mV pp</b>	<b>1898136</b>
<b>12 V</b>	<b>1500 mA</b>	<b>120 mV pp</b>	<b>1898137</b>
<b>15 V</b>	<b>1200 mA</b>	<b>150 mV pp</b>	<b>1898138</b>
<b>18 V</b>	<b>1000 mA</b>	<b>180 mV pp</b>	<b>1898139</b>
<b>24 V</b>	<b>750 mA</b>	<b>180 mV pp</b>	<b>1898140</b>
<b>48 V</b>	<b>375 mA</b>	<b>200 mV pp</b>	<b>1898141</b>

## FOX30-XM



FW8030M

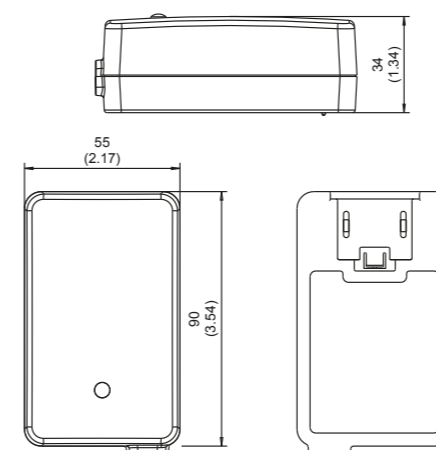

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
<b>5 V</b>	<b>5000 mA</b>	<b>150 mV pp</b>	<b>1898160</b>
<b>5.9 V</b>	<b>4200 mA</b>	<b>150 mV pp</b>	<b>1898161</b>
<b>7.5 V</b>	<b>4000 mA</b>	<b>150 mV pp</b>	<b>1898162</b>
<b>9 V</b>	<b>3300 mA</b>	<b>120 mV pp</b>	<b>1898163</b>
<b>12 V</b>	<b>2500 mA</b>	<b>120 mV pp</b>	<b>1898164</b>
<b>15 V</b>	<b>2000 mA</b>	<b>150 mV pp</b>	<b>1898165</b>
<b>18 V</b>	<b>1600 mA</b>	<b>200 mV pp</b>	<b>1898166</b>
<b>24 V</b>	<b>1250 mA</b>	<b>200 mV pp</b>	<b>1898167</b>
<b>48 V</b>	<b>625 mA</b>	<b>300 mV pp</b>	<b>1898168</b>

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	160 mA (FOX6-XM-USB), 250 mA (FOX12-XM-USB)
<b>Leakage current</b>	≤ 10 µA
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 2 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 76 % (FOX6-XM-USB), ≥ 80 % (FOX12-XM-USB)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 45° C
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	3000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60601-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032, EN 60601-1-2
<b>Medical protection</b>	2 x MOPP

### Mechanical data

<b>Dimensions</b>	55.0 x 31.5 x 41.0 mm (FOX6-XM-USB), 75.0 x 31.5 x 41.0 mm (FOX12-XM-USB)
<b>Weight</b>	50 g (FOX6-XM-USB), 65 g (FOX12-XM-USB)
<b>Connectors</b>	AC input: Interchangeable primary adapter system DC output: USB socket type A

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies


# MEDICAL

with interchangeable adapter system.

All products are IEC 60601-1 approved and conform to IEC60601-1-2 4th edition.

## FOX6-XM-USB

FW8002M/USB

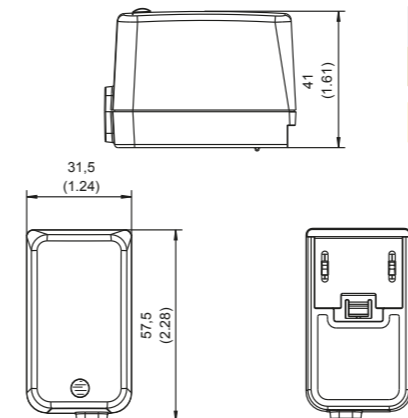


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			white	black
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>1400 mA</b>	<b>80 mV pp</b>	<b>1899497</b>	<b>1898349</b>

## FOX12-XM-USB

FW8000M/USB

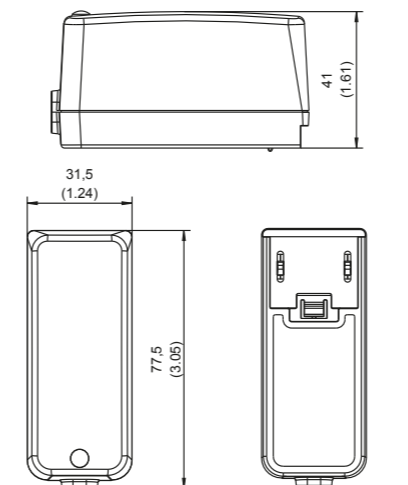

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), deviation ± 0.5 (0.02)

Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
<b>5 V</b>	<b>2200 mA</b>	<b>150 mV pp</b>	<b>1898350</b>





Switchmode power supplies

# MEDICAL

with fixed AC plug.

All products conform to IEC 60601-1 and IEC60601-1-2 4th edition.

Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

Technical data

Input voltage	100 – 240 V ± 10 %
Frequency	50 – 60 Hz
Input current	160 – 80 mA (FOX6-FM), 300 – 150 mA (FOX12-FM)
Leakage current	≤ 10 µA
Output voltage tolerance	± 5 %
Turn-on delay	≤ 2 s
Stand-by	≤ 0.1 W
Efficiency (typ. full load)	≥ 80 % (FOX6-FM), ≥ 83 % (FOX12-FM)
MTBF	200.000 h*

Environmental specifications

Operating temperature	0 – 45° C
Humidity	10 – 95 %
Storage temperature	-40 – 70° C
Operating altitude	3000 m


Safety specifications

Layout acc. to safety standard	IEC 60601-1
Approvals	EU, USA, AUS, JPN
Safety class	II
EMC	EN 55024, EN 55032, EN 60601-1-2
Medical protection	2 x MOPP


Mechanical data

Dimensions	55.0 x 31.5 x 41.0 mm (FOX6-FM), 75.0 x 31.5 x 41.0 mm (FOX12-FM)
Weight	114 g (FOX6-FM USA/Japan), 119 g (FOX6-FM EURO), 130 g (FOX12-FM USA/Japan), 134 g (FOX12-FM AUS), 135 g (FOX12-FM EURO), 143 g (FOX12-FM UK)
Connectors	AC input: See article no. DC output: Secondary adapter system

## FOX6-FM

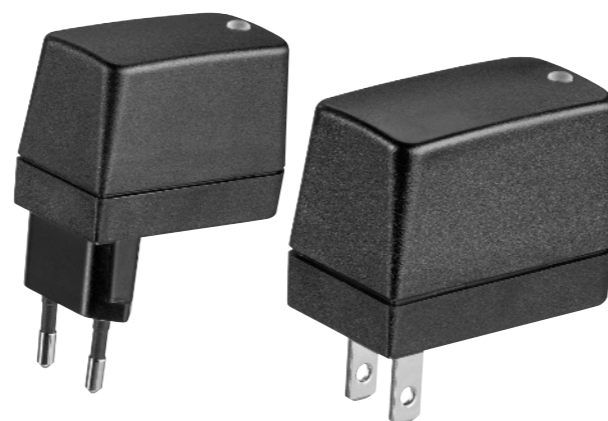

FW8002M

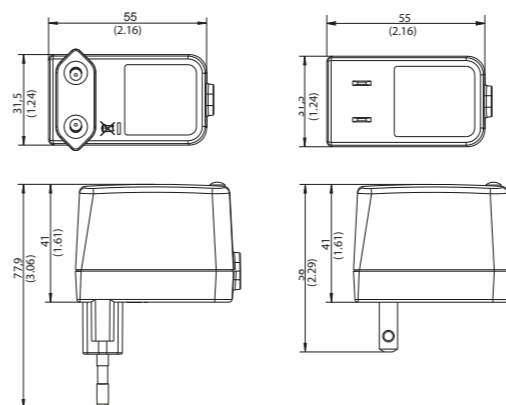

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)




Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
5 V	1400 mA	180 mV pp	1898739	1898748
5.9 V	1200 mA	150 mV pp	1898740	1898749
7.5 V	800 mA	150 mV pp	1898741	1898750
9 V	800 mA	150 mV pp	1898742	1898751
12 V	600 mA	200 mV pp	1898743	1898752
15 V	500 mA	200 mV pp	1898744	1898753
18 V	400 mA	180 mV pp	1898745	1898754
24 V	300 mA	240 mV pp	1898746	1898755
48 V	150 mA	480 mV pp	1898747	1898756

## FOX12-FM



FW8000M

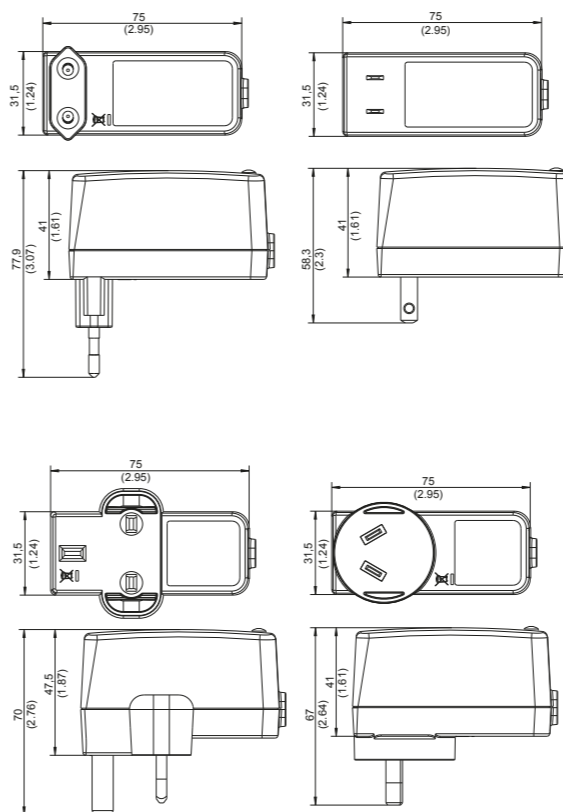

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			EURO	USA/Japan	UK	AUS
Voltage	Current	Ripple voltage	Article no.	Article no.	Article no.	Article no.
5 V	2200 mA	150 mV pp	1898776	1898785	1898849	1898858
5.9 V	2000 mA	150 mV pp	1898777	1898786	1898850	1898859
7.5 V	1400 mA	150 mV pp	1898778	1898787	1898851	1898860
9 V	1300 mA	150 mV pp	1898779	1898788	1898852	1898861
12 V	1000 mA	150 mV pp	1898780	1898789	1898853	1898862
15 V	800 mA	150 mV pp	1898781	1898790	1898854	1898863
18 V	660 mA	180 mV pp	1898782	1898791	1898855	1898864
24 V	500 mA	240 mV pp	1898783	1898792	1898856	1898865
48 V	250 mA	480 mV pp	1898784	1898793	1898857	1898866

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	400 – 200 mA (FOX18-FM), 600 – 300 mA (FOX30-FM)
<b>Leakage current</b>	≤ 10 µA
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 1 s (FOX18-FM), ≤ 3 s (FOX30-FM)
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 86 % (FOX18-FM), ≥ 87 % (FOX30-FM)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 50° C (FOX 18-FM), 0 – 45° C (FOX 30-FM)
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	3000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60601-1
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032, EN 60601-1-2
<b>Medical protection</b>	2 x MOPP


### Mechanical data

<b>Dimensions</b>	77.0 x 50.0 x 34.0 mm (FOX18-FM), 90.0 x 55.0 x 34.0 mm (FOX30-FM)
<b>Weight</b>	164 g (FOX18-FM USA/Japan), 166 g (FOX18-FM EURO), 193 g (FOX30-FM USA/Japan), 195 g (FOX30-FM EURO)
<b>Connectors</b>	AC input: See article no. DC output: Secondary adapter system

## FOX18-FM



FW8001M

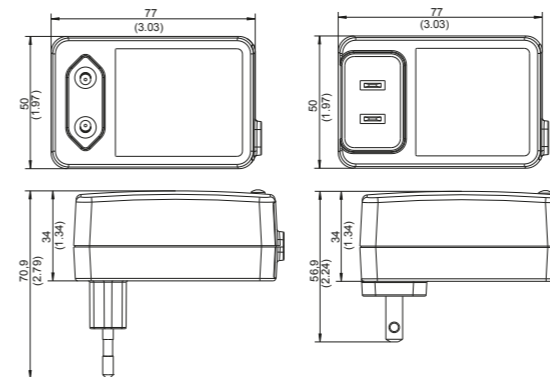

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)




Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>3000 mA</b>	<b>150 mV pp</b>	<b>1898937</b>	<b>1898946</b>
<b>5.9 V</b>	<b>3000 mA</b>	<b>120 mV pp</b>	<b>1898938</b>	<b>1898947</b>
<b>7.5 V</b>	<b>2400 mA</b>	<b>120 mV pp</b>	<b>1898939</b>	<b>1898948</b>
<b>9 V</b>	<b>2000 mA</b>	<b>120 mV pp</b>	<b>1898940</b>	<b>1898949</b>
<b>12 V</b>	<b>1500 mA</b>	<b>120 mV pp</b>	<b>1898941</b>	<b>1898950</b>
<b>15 V</b>	<b>1200 mA</b>	<b>150 mV pp</b>	<b>1898942</b>	<b>1898951</b>
<b>18 V</b>	<b>1000 mA</b>	<b>180 mV pp</b>	<b>1898943</b>	<b>1898952</b>
<b>24 V</b>	<b>750 mA</b>	<b>180 mV pp</b>	<b>1898944</b>	<b>1898953</b>
<b>48 V</b>	<b>375 mA</b>	<b>200 mV pp</b>	<b>1898945</b>	<b>1898954</b>

## FOX30-FM



FW8030M

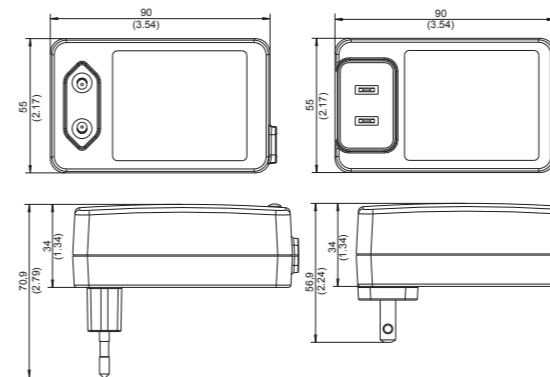

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>5000 mA</b>	<b>150 mV pp</b>	<b>1898813</b>	<b>1898822</b>
<b>5.9 V</b>	<b>4200 mA</b>	<b>150 mV pp</b>	<b>1898814</b>	<b>1898823</b>
<b>7.5 V</b>	<b>4000 mA</b>	<b>150 mV pp</b>	<b>1898815</b>	<b>1898824</b>
<b>9 V</b>	<b>3300 mA</b>	<b>120 mV pp</b>	<b>1898816</b>	<b>1898825</b>
<b>12 V</b>	<b>2500 mA</b>	<b>120 mV pp</b>	<b>1898817</b>	<b>1898826</b>
<b>15 V</b>	<b>2000 mA</b>	<b>150 mV pp</b>	<b>1898818</b>	<b>1898827</b>
<b>18 V</b>	<b>1600 mA</b>	<b>200 mV pp</b>	<b>1898819</b>	<b>1898828</b>
<b>24 V</b>	<b>1250 mA</b>	<b>200 mV pp</b>	<b>1898820</b>	<b>1898829</b>
<b>48 V</b>	<b>625 mA</b>	<b>300 mV pp</b>	<b>1898821</b>	<b>1898830</b>

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies

# MEDICAL

with fixed AC plug.

All products conform to IEC 60601-1 and IEC60601-1-2 4th edition.



**Characteristics**

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

**Technical data**

<b>Input voltage</b>	100 – 240 V ± 10 %
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	160 mA (FOX6-FM-USB), 250 mA (FOX12-FM-USB)
<b>Leakage current</b>	≤ 10 µA
<b>Output voltage tolerance</b>	± 5 %
<b>Turn-on delay</b>	≤ 2 s
<b>Stand-by</b>	≤ 0.1 W
<b>Efficiency (typ. full load)</b>	≥ 76 % (FOX6-FM-USB), ≥ 80 % (FOX12-FM-USB)
<b>MTBF</b>	200.000 h*

**Environmental specifications**

<b>Operating temperature</b>	0 – 45° C
<b>Humidity</b>	10 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	3000 m

**Safety specifications**

<b>Layout acc. to safety standard</b>	IEC 60601-1 (FOX6-FM-USB), IEC 60601-1-2 (FOX12-FM-USB)
<b>Approvals</b>	EU, USA, AUS, JPN
<b>Safety class</b>	II
<b>EMC</b>	EN 55024, EN 55032, EN 60601-1-2
<b>Medical protection</b>	2 x MOPP

**Mechanical data**

<b>Dimensions</b>	55.0 x 31.5 x 41.0 mm (FOX6-FM-USB), 75.0 x 31.5 x 41.0 mm (FOX12-FM-USB)
<b>Weight</b>	52 g (FOX6-FM-USB USA/Japan), 57 g (FOX6-FM-USB EURO), 68 g (FOX12-FM-USB USA/Japan), 72 g (FOX12-FM-USB AUS), 73 g (FOX12-FM-USB EURO), 81 g (FOX12-FM-USB UK)
<b>Connectors</b>	AC input: See article no. DC output: USB socket type A

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)


Switchmode power supplies

# MEDICAL


with fixed AC plug.

All products conform to IEC 60601-1 and IEC60601-1-2 4th edition.

## FOX6-FM-USB

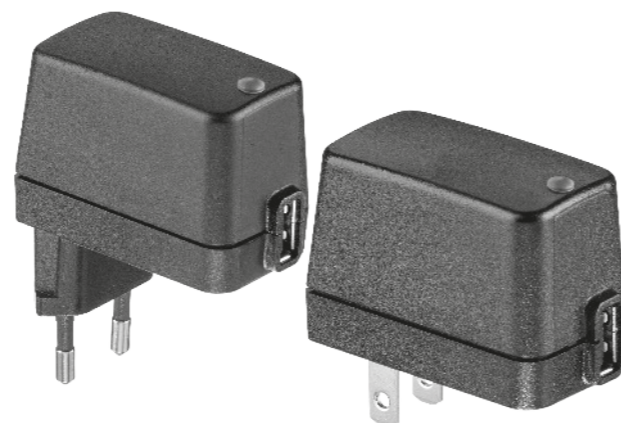

FW8002M/USB

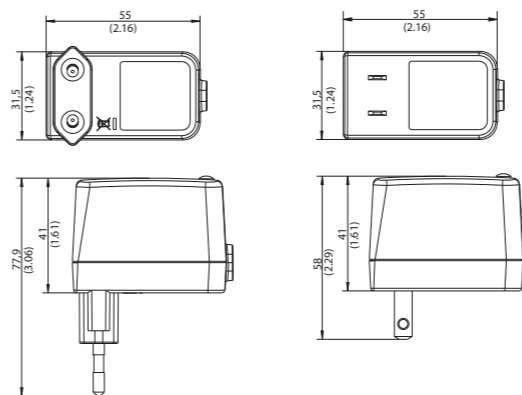


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)




Output data			EURO	USA/Japan
Voltage	Current	Ripple voltage	Article no.	Article no.
<b>5 V</b>	<b>1400 mA</b>	<b>80 mV pp</b>	<b>1898869</b>	<b>1898870</b>

## FOX12-FM-USB

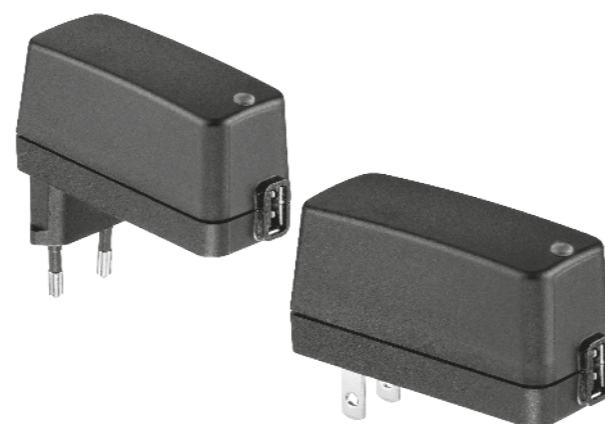

FW8000M/USB

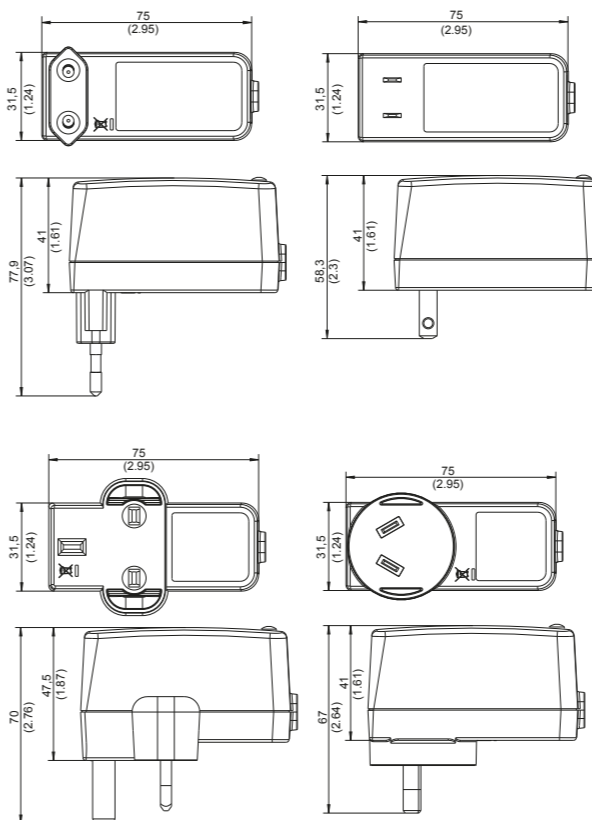

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			EURO	USA/Japan	UK	AUS
Voltage	Current	Ripple voltage	Article no.	Article no.	Article no.	Article no.
<b>5 V</b>	<b>2200 mA</b>	<b>80 mV pp</b>	<b>1898871</b>	<b>1898872</b>	<b>1898873</b>	<b>1898874</b>





## Switchmode power supplies

**MEDICAL**

## Desktop

All products conform to IEC 60601-1.

## Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

## Technical data

Input voltage	100 – 240 V
Frequency	50 – 60 Hz
Input current	600 – 300 mA (FOX30-DM), 1100 – 500 mA (DT50-M)
Leakage current	≤ 10 µA
Output voltage tolerance	± 5 %
Turn-on delay	≤ 3 s
Stand-by	≤ 0.1 W (FOX30-DM), ≤ 0.5 W (DT50-M)
Efficiency (typ. full load)	≥ 87 % (FOX30-DM), ≥ 90 % (DT50-M)
MTBF	200.000 h*

## Environmental specifications

Operating temperature	0 – 45° C
Humidity	10 – 95 %
Storage temperature	-40 – 70° C
Operating altitude	3000 m (FOX30-DM), 4000 m (DT50-M)

## Safety specifications


Layout acc. to safety standard	IEC 60601-1
Approvals	EU, USA, AUS, JPN (FOX30-DM)
Safety class	II
EMC	EN 55024, EN 55032, EN 60601-1-2
Medical protection	2 x MOPP

## Mechanical data

Dimensions	90.0 x 55.0 x 32.0 mm (FOX30-DM), 60.0 x 130.0 x 38.1 mm (DT50-M)
Weight	187 g (FOX30-DM), 295 g (DT50-M)
Connectors	AC input: 2 pole, IEC 60320-C8 socket DC output: Secondary adapter system

**FOX30-DM** 

## FW8030M/DT

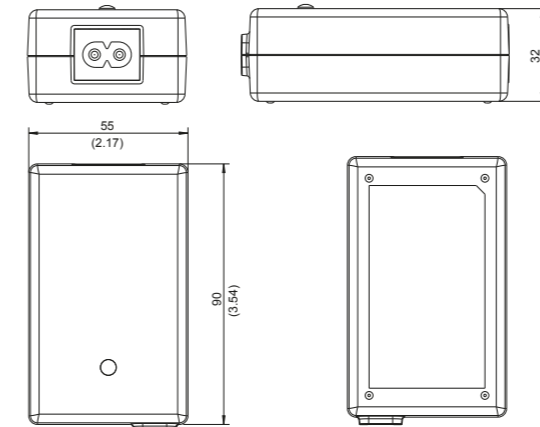


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	5000 mA	150 mV pp	1898179
5.9 V	4200 mA	150 mV pp	1898180
7.5 V	4000 mA	150 mV pp	1898181
9 V	3300 mA	120 mV pp	1898182
12 V	2500 mA	120 mV pp	1898183
15 V	2000 mA	150 mV pp	1898184
18 V	1670 mA	200 mV pp	1898185
24 V	1250 mA	200 mV pp	1898186
48 V	625 mA	300 mV pp	1898187

**DT50-M** 

## FW7405M

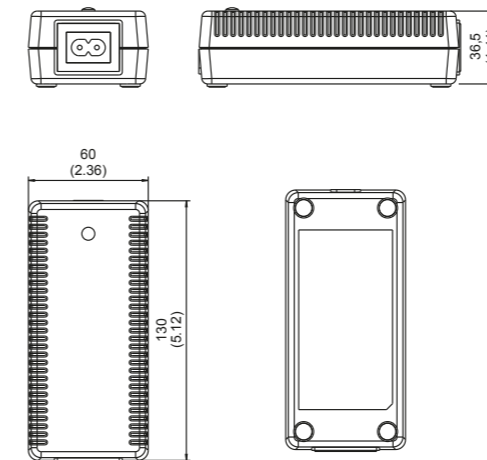

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	5000 mA	120 mV pp	1890649
12 V	3800 mA	120 mV pp	1890650
15 V	3000 mA	120 mV pp	1890839
24 V	2200 mA	120 mV pp	1825898

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz &amp; 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



### Characteristics

- Efficiency level VI
- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

Input voltage	100 – 240 V
Frequency	50 – 60 Hz
Input current	1700 – 850 mA (DT80-M), 2000 – 700 mA (DT150-M)
Leakage current	≤ 100 µA
Output voltage tolerance	± 5 %
Stand-by	≤ 0.5 W
Efficiency (typ. full load)	≥ 90 %
MTBF	200.000 h*

### Environmental specifications

Operating temperature	0 – 40° C
Humidity	10 – 95 %
Storage temperature	-40 – 70° C
Operating altitude	3000 m

### Safety specifications

Layout acc. to safety standard	IEC 60601-1
Approvals	EU, USA
Safety class	II (DT80-M), I (DT150-M)
EMC	EN 60601-1
Medical protection	2 x MOPP

### Mechanical data

Dimensions	79.0 x 149.0 x 50.0 mm (DT80-M), 62.0 x 210.0 x 38.5 mm (DT150-M)
Weight	350 g (DT80-M), 622 g (DT150-M)
Connectors	AC input: 2 pole, IEC 60320-C8 socket, (DT80-M), IEC60320-C14 (DT150-M) DC output: Secondary adapter system (DT80-M) Lead with coax connector 11.0 x 6.5 x 3.0 mm (DT150-M)

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies

# MEDICAL


### Desktop

All products conform to IEC 60601-1.

## DT80-M



### FW7488M

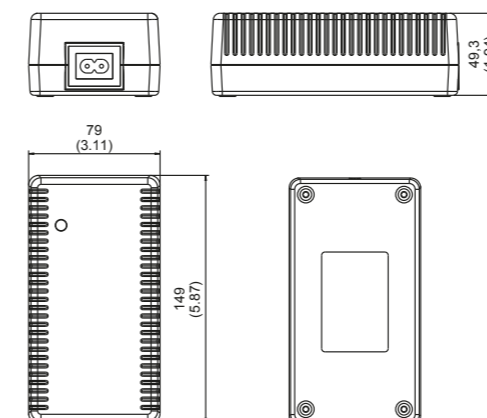

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)




Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
12 V	5500 mA	120 mV pp	1890865
15 V	5000 mA	120 mV pp	1828339
24 V	3300 mA	120 mV pp	1890981

## DT150-M




### DT150M

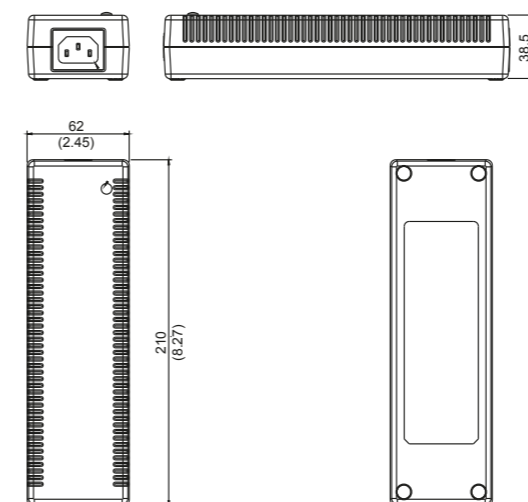

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
24 V	6250 mA	240 mV pp	1893142

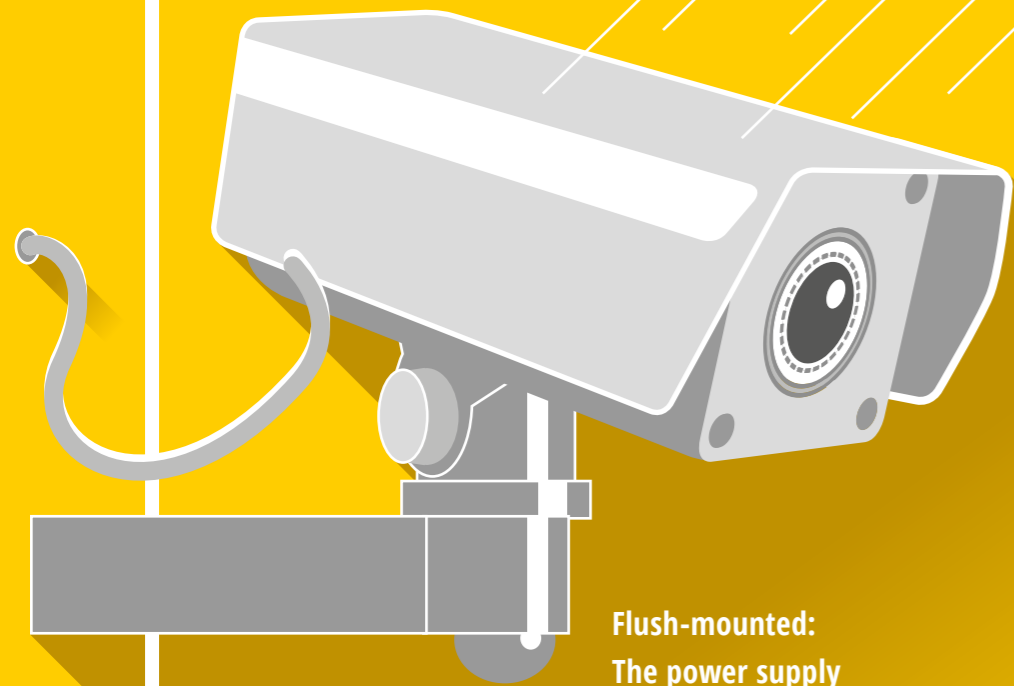

**Flush-mounted:**  
The power supply  
unit can be fully  
hidden in walls.

Flush-mounted

## SEEING THE UNSEEN

The FRIWO flush-mounted range: Compact, highly efficient switch mode power supply units, with an optimum size for easy mounting. With a maximum diameter of just 51 mm, these units are ideal for installation in all standard flush-mounted sockets and can be fully hidden in walls. FRIWO's flush-mounted power supply units offer numerous advantages, from protection against vandalism to reduced cleaning in applications that require high levels of hygiene. This has made them a firm favorite for building technology, security and sanitary applications. Their cast housing means they are ideally suited for use in damp environments (protection class IP67).

Along with 6 W, 12 W and 18 W cast devices, the flush-mounted range includes the UP USB. This power supply unit features two USB interfaces in one standard socket, allowing you to charge a broad range of home and office devices directly from the wall, while reducing the need for additional chargers and annoying tangled cables. More power for each port: The third generation of the FRIWO UP USB socket comes with an intelligent detection by smart IC. This allows the connected devices to be provided with individually adjusted currents - with a maximum power of up to 3 A at a USB port! A significant advantage compared to conventional UP USB solutions, which, despite a total capacity of 3 A, can only provide max. 1.5 A per USB port.



**For easy installation and  
protection against vandalism.**

All the devices in the UP range have a 90 to 264 V AC wide range input, making them suitable for use anywhere in the world. The devices are protection class II compliant, voltage controlled, current-limited and continuously short-circuit-proof, which means they offer a high level of operational safety combined with a long operational life. They also comply with the latest guidelines. Thanks to idle consumption of  $\leq 300$  mW and high efficiency at every power level, the units comply with the current threshold values of various energy efficiency programs, such as Energy Star, MEPS or ErP. Flush-mounted power supply units with custom outputs or special leads are also possible on request.



### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

Input voltage	100 – 240 V
Frequency	50 – 60 Hz
Input current	150 mA (UP6), 200 mA (UP USB), 400 mA (UP12, UP18)
Leakage current	≤ 10 µA (UP6), ≤ 25 µA (UP12, UP18), ≤ 90 µA (UP USB)
Output voltage tolerance	± 5 %
Efficiency (typ. full load)	≥ 80 %
MTBF	200.000 h*

### Environmental specifications

Operating temperature	0 – 40° C
Humidity	10 – 95 %
Storage temperature	-20 – 70° C

### Safety specifications

Layout acc. to safety standard	IEC 60335-1, IEC 60950, IEC 61558 (UP6, UP12, UP18), IEC 60950 (UP USB)
Approvals	EU, US (UP6, UP12, UP18), EU (UP USB)
Safety class	II
EMC	EN 55011, EN 55024, EN 55032 (UP6, UP12, UP18), EN 55024, EN 55024 (UP USB)

### Mechanical data

Dimensions	51.0 x 48.0 x 25.0 mm (UP6), 51.0 x 48.0 x 35.0 mm (UP12, UP18), 48.0 x 44.0 x 43.0 mm (UP USB)
Weight	95 g (UP6), 130 g (UP12, UP18), 70 g (UP USB)
Connectors	AC input: Leads 150 mm (UP6, UP12, UP18) Screw terminal 2 x 2.5 mm <sup>2</sup> (UP USB) DC output: Leads 150 mm (UP6, UP12, UP18) USB socket type A (UP USB)

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



## Switchmode power supplies

# FLUSH-MOUNTED

All products conform to IEC 60950.

## UP USB

FW7810 | Optionally with smart IC  
for intelligent device recognition

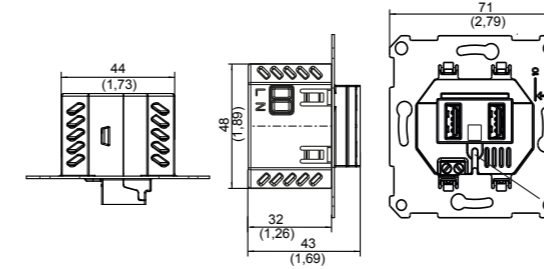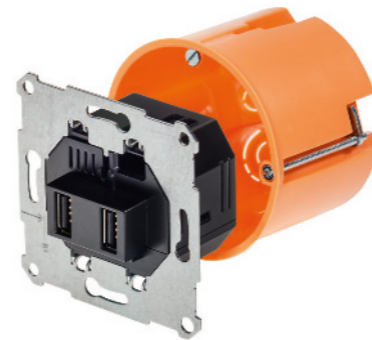


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0,02)  
All Dimensions in Millimeter (Inch), deviation ± 0,5 (0,02)

Output data					Worldwide
Voltage	Current	Smart IC	Ripple voltage	Support ring	Article no.
5 V	2100 mA	no	80 mV pp	yes	1897516
5 V	2100 mA	no	80 mV pp	no	1899027
5 V	3000 mA	yes	80 mV pp	yes	1899549
5 V	3000 mA	yes	80 mV pp	no	1899778

## UP6

FW7801

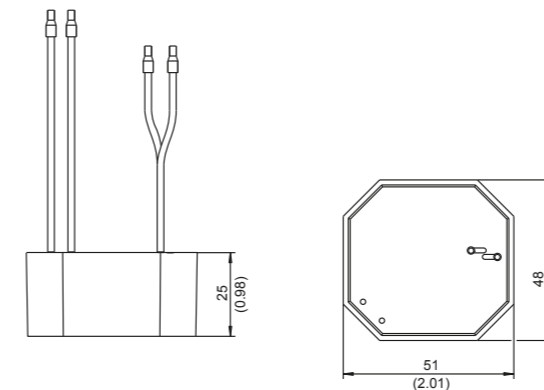

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0,02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0,02)


Output data UP12			Worldwide
Voltage	Current	Ripple voltage	Article no.
12 V	1000 mA	300 mV pp	1891767
24 V	500 mA	300 mV pp	1891768

Output data UP18			Worldwide
Voltage	Current	Ripple voltage	Article no.
12 V	1500 mA	400 mV pp	1832688
24 V	750 mA	400 mV pp	1891685

## UP12 / UP18

FW7802 / FW7803

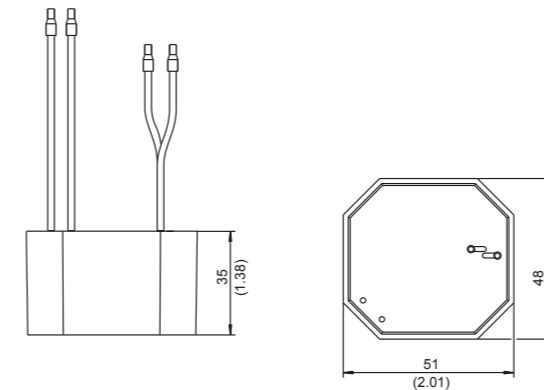

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0,02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0,02)

Output data			Worldwide
Voltage	Current	Ripple voltage	Article no.
5 V	2100 mA	80 mV pp	1897516
5 V	2100 mA	80 mV pp	1899027



**Designed for maximum vibration,  
shock and temperature resistance.**

**No active  
fan – but still  
always cool.**

**Open frame**

## **TOP RATINGS, WORLDWIDE**

FRIWO is revolutionizing its existing open-frame product portfolio by adding the new product line „HERC“. The product name stands for “High Efficiency and Rapid Customization” and features two essential characteristics of the compact built-in components: very high efficiency meets an easy-to-adapt open design for fast customer-specific modifications. All this on market standard PCB measures of 3”x2”, 4”x2” and 5”x3” for the different power ratings – combined with minimal height of only 1”- 1.3”.

With up to 94 % efficiency, the power supplies belong to the top tier. FRIWO also sets new standards for idle power consumption: the DoE Level VI requirements for external power supplies are exceeded, which is quite unusual for open-frame power supplies. The first lines of the new product series include output voltages of 5 - 48 VDC for power classes of 18 W, 30 W and 175 W. Further power ratings of the new product line are still being engineered and will be launched shortly.

The new HERC series complements FRIWO’s established OF product family: compact, open-frame power supplies for the most demanding applications. Designed for maximum vibration, shock and temperature resistance, the incredible operating life of these devices sets new standards. Support also comes from their compact design, which dispenses with active fans. All the devices are purely convection cooled, which makes them far quieter in operation and avoids the need for a component that is prone to failure.

These highly efficient power supply units suffer almost no loss of power in standby mode, and the extremely low leakage current helps achieve maximum patient safety in medical technology applications as well as accurate readings in measurement applications, among numerous other advantages.

All the devices have a 100 to 240 V AC wide range input, making them suitable for global use. They fulfill high protection class requirements and are voltage controlled, current limited and continuously short-circuit-proof. Many models feature an additional auxiliary output, which allows the application to be switched on and off easily, regardless of where the power supply unit is located. That offers more freedom in the design process and creates the potential for energy savings.

The open design of the product range makes the units extremely adaptable and allows for custom, made-to-measure solutions. Many of the devices in the standard portfolio are all-in-one solutions, certified for medical, household and IT applications.



**Characteristics**

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

**Technical data**

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>No load power consumption</b>	≤ 0,1 W (HERC18, HERC30), ≤ 0,21 W (HERC175)
<b>Input current</b>	400 – 200 mA (HERC18), 600 – 300 mA (HERC30), 1800 – 900 mA (HERC175)
<b>Earth leakage current</b>	≤ 100 µA (HERC175)
<b>Touch current</b>	≤ 10 µA (HERC18, HERC30), ≤ 100 µA (HERC175)
<b>Ripple voltage</b>	≤ 1 % of nominal voltage
<b>Output voltage tolerance</b>	+/- 3 %
<b>Stand-by</b>	≤ 0,1 W (HERC18, HERC30), ≤ 0,21 W (HERC175)
<b>Efficiency (typ. full load)</b>	≥ 86 % (HERC18), ≥ 87 % (HERC30, HERC175)
<b>MTBF</b>	200.000 h*

**Environmental specifications**

<b>Operating temperature</b>	-20 – 70° C
<b>Humidity</b>	95 % max.
<b>Storage temperature</b>	-40 – 85° C
<b>Operating altitude</b>	3000 m (HERC18), 4000 m (HERC30), 5000 m (HERC175)

**Safety specifications**

<b>Layout acc. to safety standard</b>	IEC 60601-1, IEC62368-1
<b>Approvals</b>	EU, UL (HERC175)
<b>Safety class</b>	II (HERC18, HERC30), I and II (HERC175)
<b>EMC</b>	EN 55011, EN 55032, EN 60601-1-2

**Mechanical data**

<b>Dimensions</b>	3 x 2 x 1.1 inch (HERC18), 3 x 2 x 1.3 inch (HERC30), 4 x 2 x 1.1 inch (HERC175)
<b>Weight</b>	60 g (HERC18), 80 g (HERC30), 160 g (HERC175)



For notes on connection and safe operation, please refer to the operating instructions.  
\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)  
\*\*Approval in progress. Please refer to our homepage for the current approval status.

Switchmode power supplies

# OPEN FRAME

All products conform to IEC 60601-1 and IEC62368-1.



## HERC18

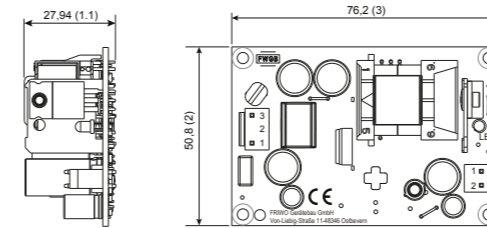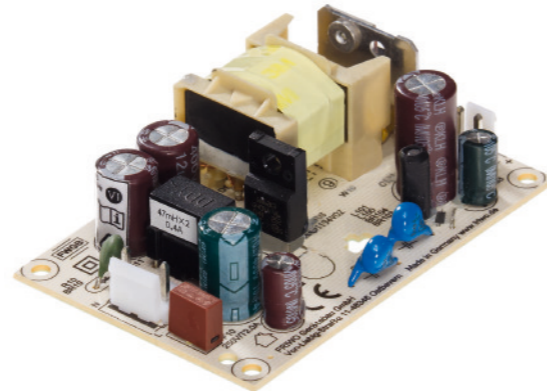

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Output data		Worldwide
Voltage	Current	Article no.
<b>5 V</b>	<b>3000 mA</b>	<b>1899395</b>
<b>12 V</b>	<b>1500 mA</b>	<b>1899396</b>
<b>15 V</b>	<b>1200 mA</b>	<b>1899397</b>
<b>24 V</b>	<b>750 mA</b>	<b>1899233</b>
<b>48 V</b>	<b>375 mA</b>	<b>1899398</b>



## HERC30

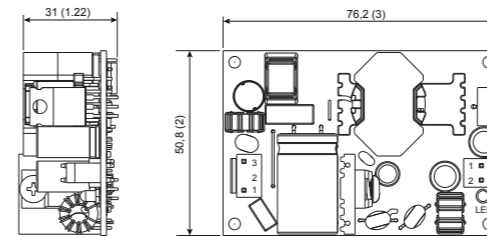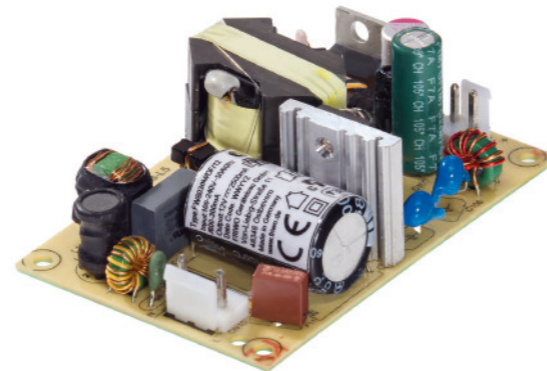

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Output data		Worldwide
Voltage	Current	Article no.
<b>5 V</b>	<b>5000 mA</b>	<b>1899388</b>
<b>12 V</b>	<b>2500 mA</b>	<b>1899389</b>
<b>15 V</b>	<b>2000 mA</b>	<b>1899390</b>
<b>24 V</b>	<b>1250 mA</b>	<b>1899234</b>
<b>48 V</b>	<b>625 mA</b>	<b>1899391</b>

## HERC175

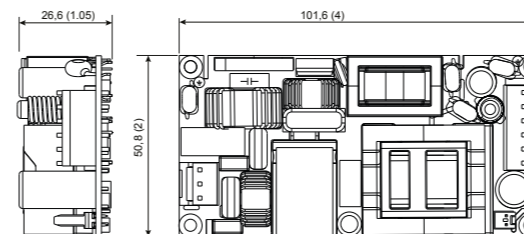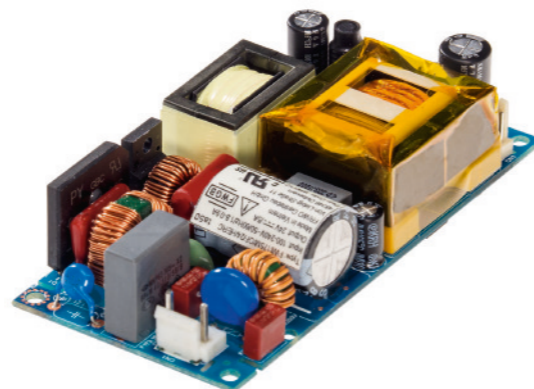

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Voltage	Output data		Worldwide Article no.
	CC*	FC	
<b>12 V</b>	<b>10000 mA</b>	<b>14600 mA</b>	<b>1899388</b>
<b>15 V</b>	<b>8000 mA</b>	<b>11600 mA</b>	<b>1899209</b>
<b>24 V</b>	<b>5000 mA</b>	<b>7300 mA</b>	<b>1899059</b>
<b>28 V</b>	<b>4300 mA</b>	<b>6250 mA</b>	<b>1899726</b>
<b>48 V</b>	<b>2500 mA</b>	<b>3650 mA</b>	<b>1899210</b>

All models feature an additional 12 V / 400 mA auxiliary output.

\*CC: Convection Cooling  
FC: Forced Cooling





### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

Input voltage	100 – 240 V
Frequency	50 – 60 Hz
Input current	1600 – 600 mA (OF65), 1800 – 800 mA (OF150)
Earth leakage current	≤ 500 µA
Touch current	≤ 100 µA
Ripple voltage	≤ 240 mV pp (OF65, OF150 24 V), ≤ 480 mV pp (OF150 12 V, OF150 48 V)
Output voltage tolerance	± 5 %
Stand-by	≤ 0.5 W
Efficiency (typ. full load)	≥ 87 %
MTBF	200.000 h*

### Environmental specifications

Operating temperature	-20 – 50° C (OF65), -20 – 70° C (OF150)
Humidity	95 % max.
Storage temperature	-20 – 85° C
Operating altitude	3000 m

### Safety specifications

Layout acc. to safety standard	IEC 60601-1, IEC 60950, IEC 61558
Approvals	EU, US
Safety class	I
EMC	EN 55024, EN 55032, EN 60601-1-2

### Mechanical data

Dimensions	101.8 x 51.2 x 25.0 mm (OF65), 127.0 x 75.4 x 35.0 mm (OF150 without U-bracket), 127.0 x 81.6 x 41.2 mm (OF150 with U-bracket)
Weight	120 g (OF65), 240 g (OF150 without U-bracket), 340 g (OF150 with U-bracket)

For notes on connection and safe operation, please refer to the operating instructions.



\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode power supplies

# OPEN FRAME

All products are IEC 60601-1,  
IEC 60950 and IEC 61558 approved.


## OF65

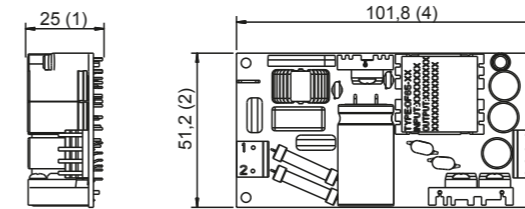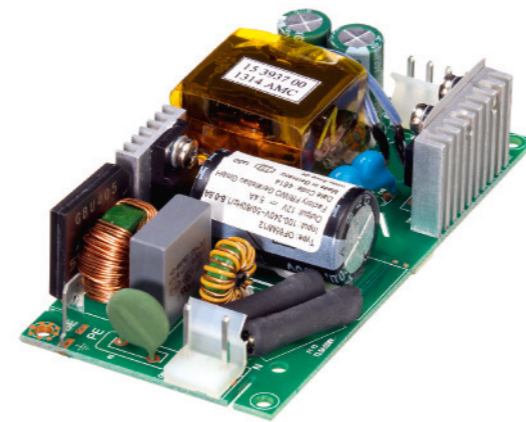

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data		Worldwide
Voltage	Current	Article no.
12 V	5400 mA	1897107
15 V	4300 mA	1899160
24 V	2700 mA	1897108
48 V	1350 mA	1897109

## OF150

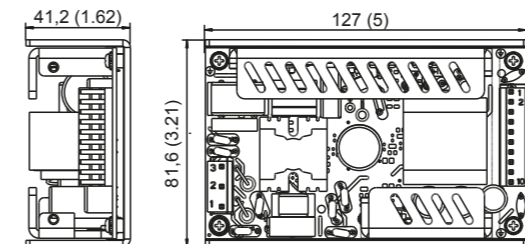

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data		Worldwide
Voltage	Current	Article no.
12 V	10500 mA	1893143
also available without U-bracket		1896246
24 V	6250 mA	1893247
also available without U-bracket		1891612
48 V	3125 mA	1893703
also available without U-bracket		1896248



### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	3500 – 1200 mA (OF250), 5500 – 2400 mA (OF450)
<b>Earth leakage current</b>	≤ 500 µA
<b>Touch current</b>	≤ 100 µA
<b>Ripple voltage</b>	≤ 250 mV pp (OF250), ≤ 240 mV pp (OF450)
<b>Output voltage tolerance</b>	± 5 %
<b>Stand-by</b>	≤ 0.5 W (OF450), ≤ 1.0 W (OF250)
<b>Efficiency (typ. full load)</b>	≥ 87 %
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 70° C (OF250), 0 – 50° C (OF450)
<b>Humidity</b>	95 % max. (OF250), 90 % max. (OF450)
<b>Storage temperature</b>	-20 – 70° C


### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60601-1, IEC 60950, IEC 61558, IEC 60335-1 (OF450)
<b>Approvals</b>	EU, US
<b>Safety class</b>	I
<b>EMC</b>	EN 550240, EN 55032, EN 60601-1-2

### Mechanical data

<b>Dimensions</b>	155.0 x 101.0 x 40.0 mm (OF250), 185.0 x 122.0 x 48.0 mm (OF450)
<b>Weight</b>	600 g (OF250), 1250 g (OF450)

## OF250

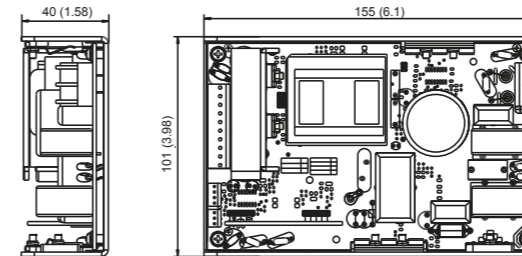


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data		Worldwide
Voltage	Current	Article no.
<b>5 V*</b>	<b>500 mA</b>	<b>1891705</b>
<b>24 V</b>	<b>10550 mA</b>	

\* Auxiliary voltage output

## OF450

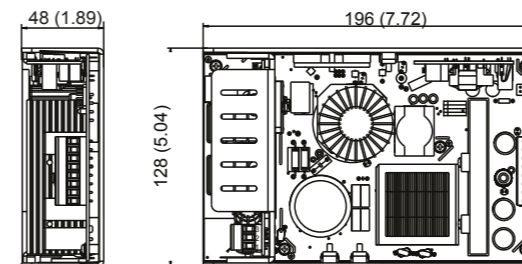

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data		Worldwide
Voltage	Current	Article no.
<b>5 V*</b>	<b>100 mA</b>	<b>1893710</b>
<b>24 V</b>	<b>18750 mA</b>	

\* Auxiliary voltage output

## Chargers


# FULL POWER, LOWER CONSUMPTION

High-quality charger technology from FRIWO: The ideal solution for mobile applications. Our standard portfolio includes extremely energy-efficient chargers for nickel and lithium battery technology, with minimal standby loss. Along with energy savings, our chargers have exceptional operational lives and offer outstanding levels of safety. All the devices are voltage controlled, current-limited and continuously short-circuit-proof. Products designed for use with lithium batteries feature charge and discharge monitoring, which effectively protects their sensitive cells.

A "one-stop shop" for charging and battery technology: Along with innovative chargers, FRIWO offers standard and custom battery solutions. Together they create optimally balanced systems. For an overview of our bundle solutions, see page 64/65 of this catalog.

In addition to our portfolio of standard products, FRIWO offers extensive development expertise for custom solutions. Regardless of whether you require high or low performance, convection cooling, temperature monitoring, active battery balancing or communication via BUS systems, FRIWO's comprehensive experience and expertise in the field of charging technology will help you find the perfect solution for your specific needs.

As an innovative company, FRIWO is also constantly exploring new power supply concepts. In the field of contactless energy transmission, we have already realized efficient inductive charging systems with a 150 W power rating and parallel 1 Mbit/s half-duplex data transfer. Because they are dust-proof and waterproof, inductive charging concepts are ideally suited for medical applications and for use in particularly rough and challenging environments.

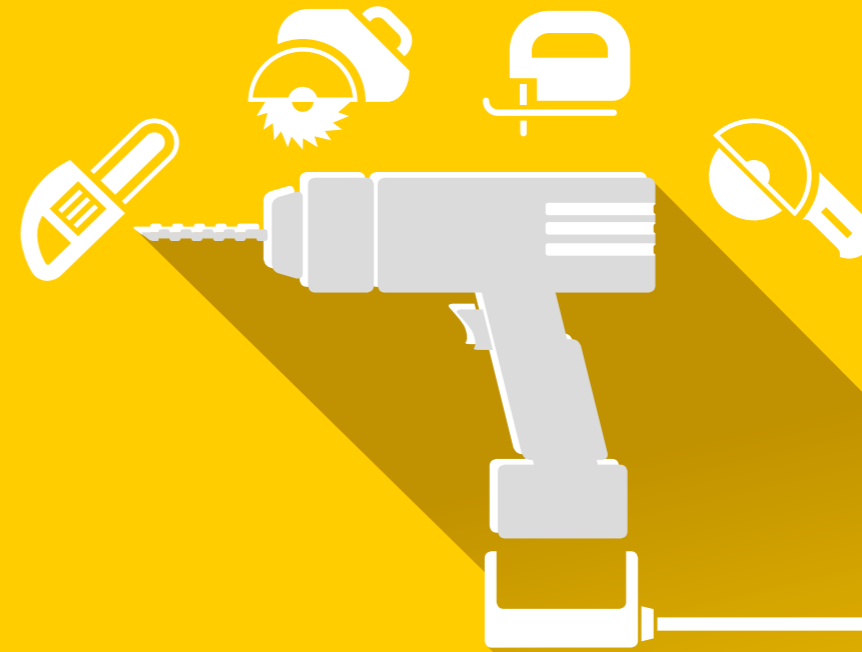

Innovative charging concepts  
for maximum mobility.



Development  
expertise from  
FRIWO: We al-  
ways have our  
finger on the  
pulse.





### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof
- Reverse polarity protection
- Timer: 12 h
- Battery NTC sensor: R = 10 kR / B = 3977

### Technical data

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	200 – 400 mA (GPP18), 180 – 450 mA (GPP36)
<b>Leakage current</b>	≤ 100 µA
<b>Output voltage tolerance</b>	± 10 %
<b>Turn-on delay</b>	≤ 1
<b>Stand-by</b>	≤ 0.5 W (GPP18), ≤ 0.8 W (GPP36)
<b>Efficiency (typ. full load)</b>	≥ 75 %
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 40° C
<b>Humidity</b>	5 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60335-2-29, IEC 60601-1 (GPP36), UL 1310,
<b>Safety class</b>	II
<b>EMC</b>	EN 55014, EN 55032, EN 61000


### Mechanical data

<b>Dimensions</b>	52.0 x 85.0 x 39.5 mm (GPP18), 69.0 x 109.0 x 45.4 mm (GPP36)
<b>Weight</b>	200 g (GPP18), 260 g (GPP36 7S), 320 g (GPP36)
<b>Connectors</b>	AC input: Interchangeable primary adapter system DC output: Secondary adapter system

## Li-Ion GPP18



FW 7290

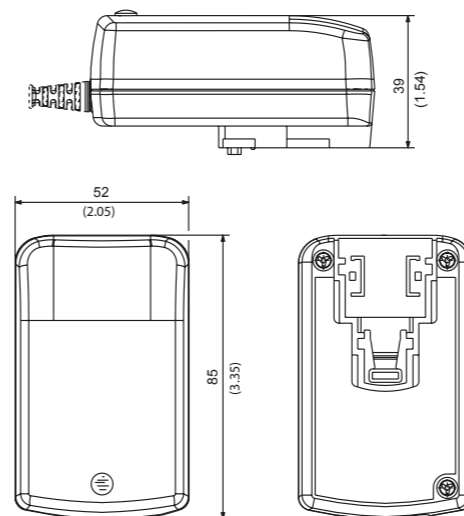

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)




Output data			Worldwide
Cells	Voltage	Current	Article no.
1	4.2 V	3000 mA	1832657
2	8.4 V	1500 mA	1832658

## Li-Ion GPP36



FW 7300 / FW 7310 (GPP36 7S)

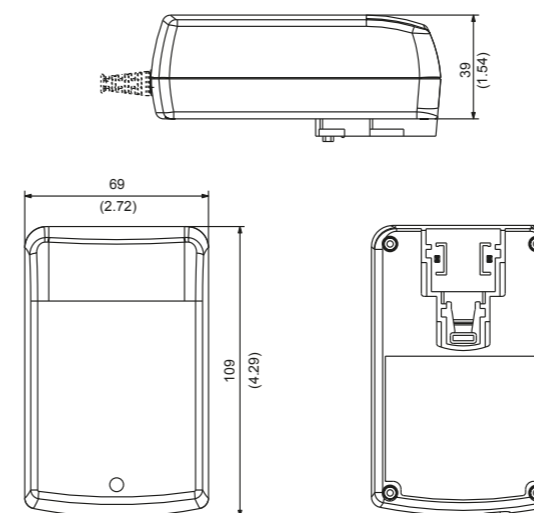

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			Worldwide
Cells	Voltage	Current	Article no.
1	4.2 V	4000 mA	1834050
2	8.4 V	3500 mA	1834051
3	12.6 V	2500 mA	1834052
4	16.8 V	2000 mA	1834053
5	21 V	1600 mA	1834054
7	29.4 V	1350 mA	1893768

\* except GPP36 7S

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz &amp; 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)



### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof
- Reverse polarity protection
- Timer: 12 h (Li-Ion FOX50-C and Li-Ion FOX90-C), 6 h (Li-Ion FOX160-C)
- Battery NTC sensor: R = 10 k $\Omega$  / B = 3977

### Technical data

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	1100 – 550 mA (Article no. 1897025, 1898549, 1897026), 1840 – 850 mA (Article no. 1897114, 1897115), 1850 – 870 mA (Article no. 1897113), 2200 mA (Article no. 1897215)
<b>Leakage current</b>	≤ 100 $\mu$ A (FOX50-C and FOX90-C), ≤ 250 $\mu$ A (FOX160-C)
<b>Reverse current</b>	50 $\mu$ A (FOX50-C and FOX90-C), 100 $\mu$ A (FOX160-C)
<b>Output voltage tolerance</b>	± 1 %
<b>Turn-on delay</b>	≤ 5 s
<b>Stand-by</b>	≤ 0.5 W
<b>Efficiency (typ. full load)</b>	≥ 80 %
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 40° C
<b>Humidity</b>	10 – 85 %
<b>Storage temperature</b>	-20 – 70° C
<b>Operating altitude</b>	2000 m

### Safety specifications

**Layout acc. to safety standard** EN 60335-1, EN 60335-2-29, UL 1310 (FOX50-C, FOX90-C),  
EN 60335-1, EN 60335-2-29, UL 1012 (FOX160-C)

<b>Safety class</b>	II
<b>EMC</b>	EN 55011, EN 55014, EN 60601-2-1, FCC15B (FOX50-C and Article no. 1897113), EN 55011, 55014, 60601-1-4 (FOX90-C), EN 55014 (FOX160-C)

### Mechanical data

<b>Dimensions</b>	179.0 x 86.0 x 50.5 mm
<b>Weight</b>	470 g (FOX50-C), 507 g (FOX90-C, FOX160-C)
<b>Connectors</b>	AC input: 2 pole, IEC 60320-C8 socket DC output: 3 pole, JST connector

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode chargers

# CHARGERS


for Lithium-Ion systems.

All products conform to IEC 60335.



## Li-Ion FOX50-C

FW 8101

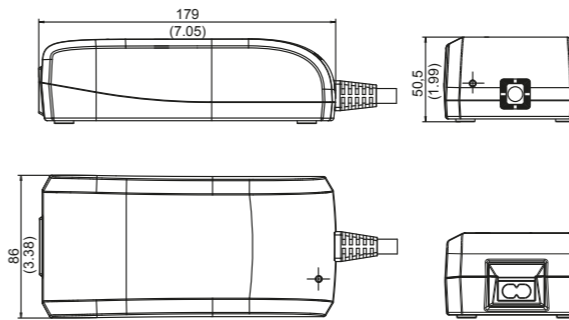


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data				
Cells	Voltage	Current	End-of-charge voltage	Article no.
4	14.4 V	3000 mA	16.8 V	1897025
7	25.2 V	1700 mA	29.4 V	1897026
8	18.8 V	1500 mA	33.6 V	1898549

## Li-Ion FOX90-C

FW 8100

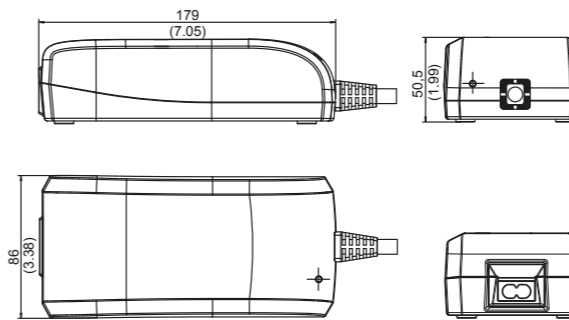


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data				
Cells	Voltage	Current	End-of-charge voltage	Article no.
7	25.2 V	3000 mA	29.4 V	1897113
8	28.8 V	2600 mA	33.6 V	1897114
10	36 V	2100 mA	42 V	1897115

## Li-Ion FOX160-C

FW 8102

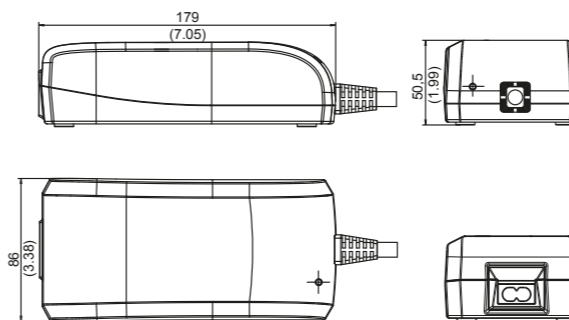

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data				
Cells	Voltage	Current	End-of-charge voltage	Article no.
10	36 V	4000 mA	42 V	1897215





### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof
- Reverse polarity protection
- Timer: 12 h
- Battery NTC sensor: R = 10 kR / B = 3977

### Technical data

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	200 – 400 mA (GPP18), 180 – 450 mA (GPP36)
<b>Leakage current</b>	≤ 100 µA
<b>Output voltage tolerance</b>	± 10 %
<b>Turn-on delay</b>	≤ 1 s
<b>Stand-by</b>	≤ 0.5 W (GPP18), ≤ 0.8 W (GPP36)
<b>Efficiency (typ. full load)</b>	≥ 75 %
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	0 – 40° C
<b>Humidity</b>	5 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	IEC 60335-2-29, IEC 60601-1 (GPP36), UL 1310
<b>Safety class</b>	II
<b>EMC</b>	EN 55014, EN 55032, EN 61000, EN 60601

### Mechanical data

<b>Dimensions</b>	52.0 x 85.0 x 39.5 mm (GPP18), 69.0 x 109.0 x 45.5 mm (GPP36)
<b>Weight</b>	200 g (GPP18), 320 g (GPP36)
<b>Connectors</b>	AC input: Interchangeable primary adapter system DC output: Secondary adapter system

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Switchmode chargers

# CHARGERS

for Lithium-Iron Phosphate systems.


All products conform to IEC 60335.

GPP36 additionally conform to IEC 60601-1.



## LiFePO4 GPP18

FW 7290

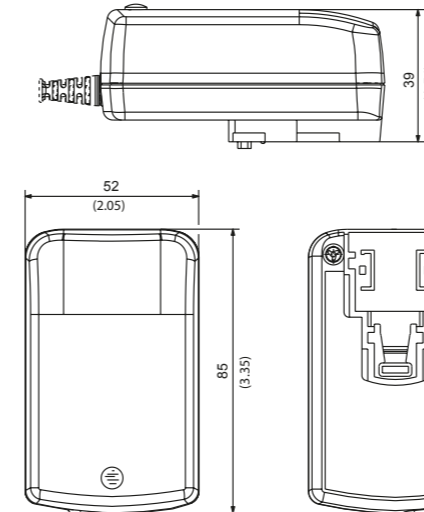


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

Output data			Worldwide
Cells	Voltage	Current	Article no.
1	3.6 V	3000 mA	1832654
2	7.2 V	1500 mA	1832655

## LiFePO4 GPP36

FW 7300

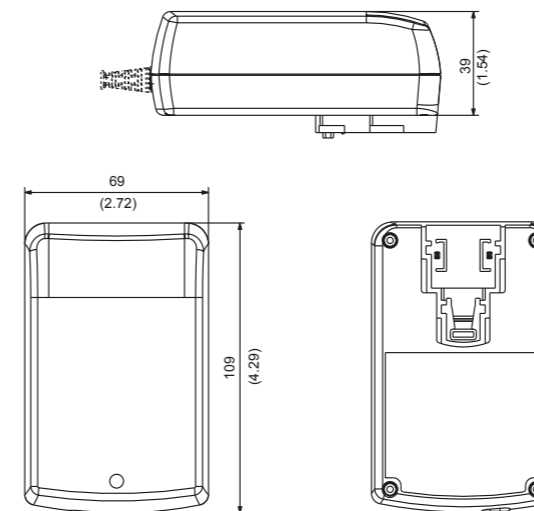

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Output data			Worldwide
Cells	Voltage	Current	Article no.
1	3.6 V	4000 mA	1834055
2	7.2 V	3500 mA	1834056
3	10.8 V	2500 mA	1834057
4	14.4 V	2000 mA	1834058
5	18 V	1600 mA	1834059





**Characteristics**

- Overload protection
- Overvoltage protection
- Continuously short circuit proof
- Reverse polarity protection (GPP18 and GPP36)
- Timer: 12 h
- Battery NTC sensor: R = 10 kR / B = 3977 (GPP18 and GPP36)

**Technical data**

<b>Input voltage</b>	100 – 240 V
<b>Frequency</b>	50 – 60 Hz
<b>Input current</b>	200 – 400 mA (GPP18), 180 – 450 mA (GPP36), 130 – 200 mA (PP8)
<b>Leakage current</b>	≤ 100 µA (GPP18, GPP36), ≤ 10 µA (PP8)
<b>Output voltage tolerance</b>	± 10 %
<b>Turn-on delay</b>	≤ 1 s
<b>Stand-by</b>	≤ 0.5 W (GPP18, PP8), ≤ 0.8 W (GPP36)
<b>Efficiency (typ. full load)</b>	≥ 75 %
<b>MTBF</b>	100.000 h* (GPP18, GPP36), 200.000 h* (PP8)

**Environmental specifications**

<b>Operating temperature</b>	0 – 40° C
<b>Humidity</b>	5 – 95 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m

**Safety specifications**

<b>Layout acc. to safety standard</b>	UL 1310, IEC 60335-2-29 (GPP18, GPP36), IEC 60335-2-29 (PP8)
<b>Safety class</b>	II
<b>EMC</b>	EN 55014, EN 55032, EN 61000, EN 60601 (GPP18, GPP36)

**Mechanical data**

<b>Dimensions</b>	52.0 x 85.0 x 39.5 mm (GPP18), 69.0 x 109.0 x 45.5 mm (GPP36), 29.0 x 74.0 x 79.0 mm (PP8)
<b>Weight</b>	125 g (PP8), 200 g (GPP18), 320 g (GPP36)
<b>Connectors</b>	AC input: GPP18 and GPP36: Interchangeable primary adapter system, PP8: See article no. DC output: Secondary adapter system

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)


Switchmode chargers

# CHARGERS

for Nickel-Cadmium-, Nickel-Metal Hydride- and Lead-Acid systems.  
All products conform to IEC 60335.

## NiCd/NiMH GPP18

FW 7290

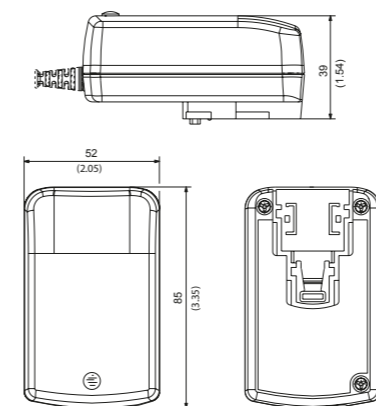


Output data				Worldwide
Cells	Capacity	Voltage	Current	Article no.
2 - 6	1 - 35 Ah	2.4 - 7.2 V	1500 - 3000 mA	1832656

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0,02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0,02)

## NiCd/NiMH GPP36

FW 7300

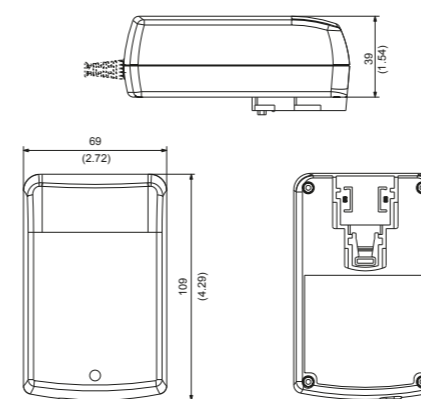


Output data				Worldwide
Cells	Capacity	Voltage	Current	Article no.
2 - 12	1 - 35 Ah	2.4 - 14.4 V	1600 - 4000 mA	1834049

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0,02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0,02)


## Pb PP8

FW 7118

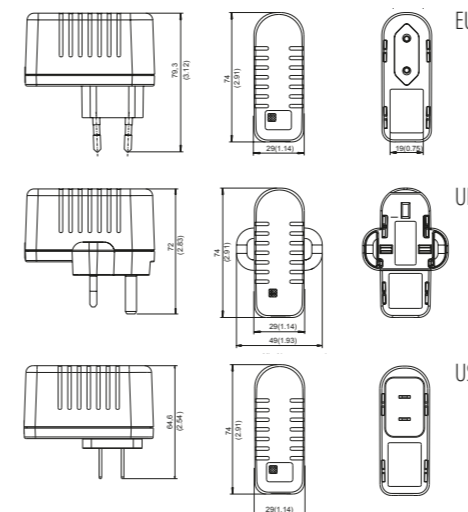

Output data				
Cells	Voltage	Current	Connector	Article no.
3	6 V	900 mA	EU	1890125
3	6 V	900 mA	UK	1824106
3	6 V	900 mA	US	1824107
6	12 V	500 mA	EU	1824396
6	12 V	500 mA	US	1825090



Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0,02)  
All Dimensions in Millimeter (Inch), deviation ± 0,5 (0,02)

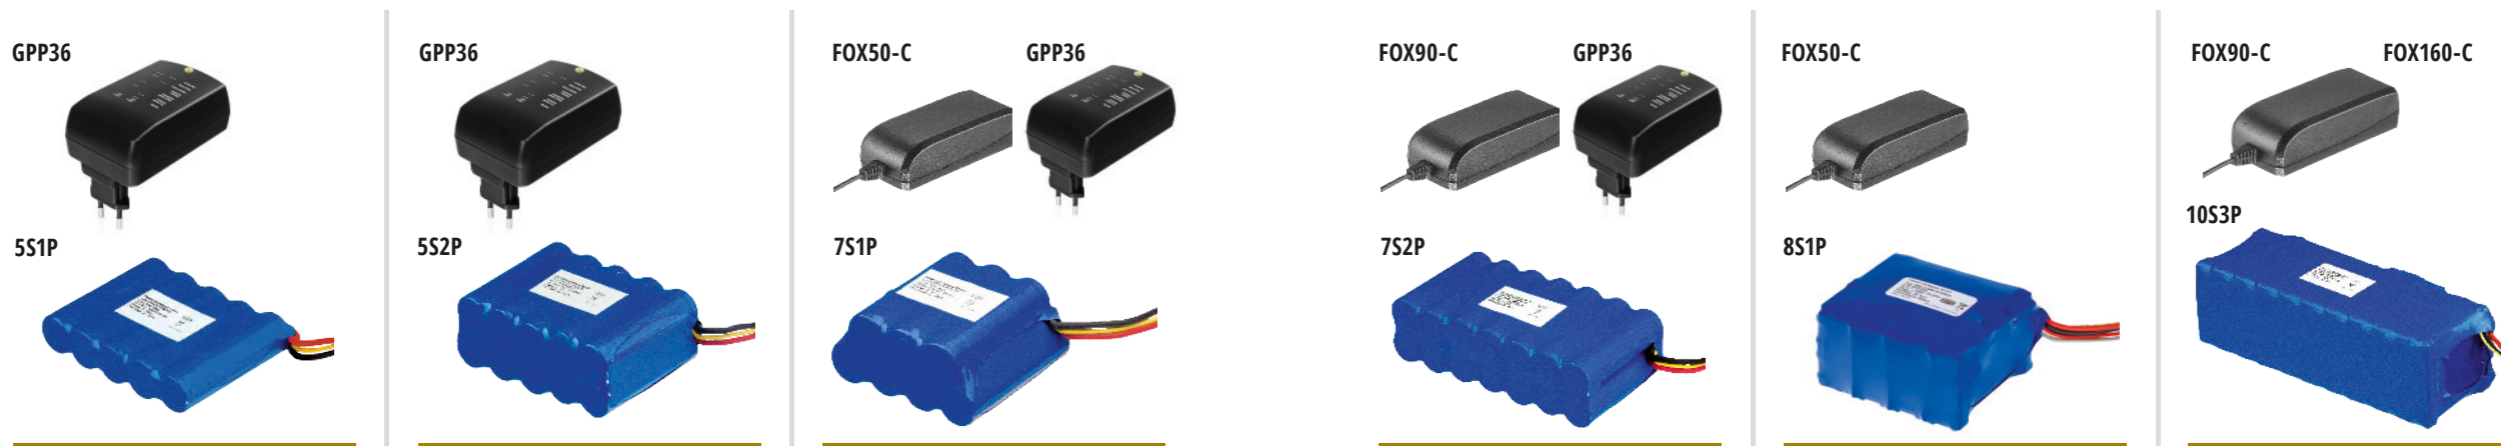

Battery packs and chargers

# BUNDLE MATRIX

An overview of our system solutions from a single source

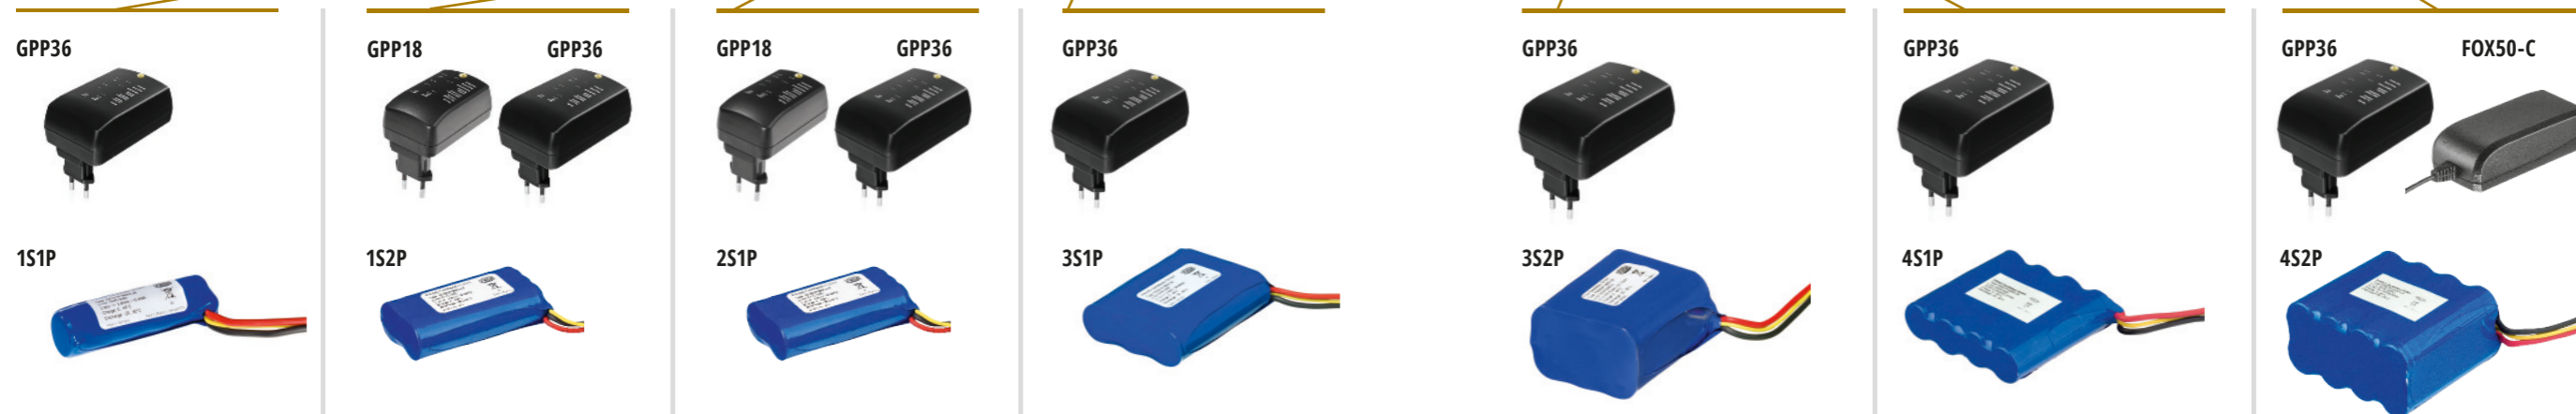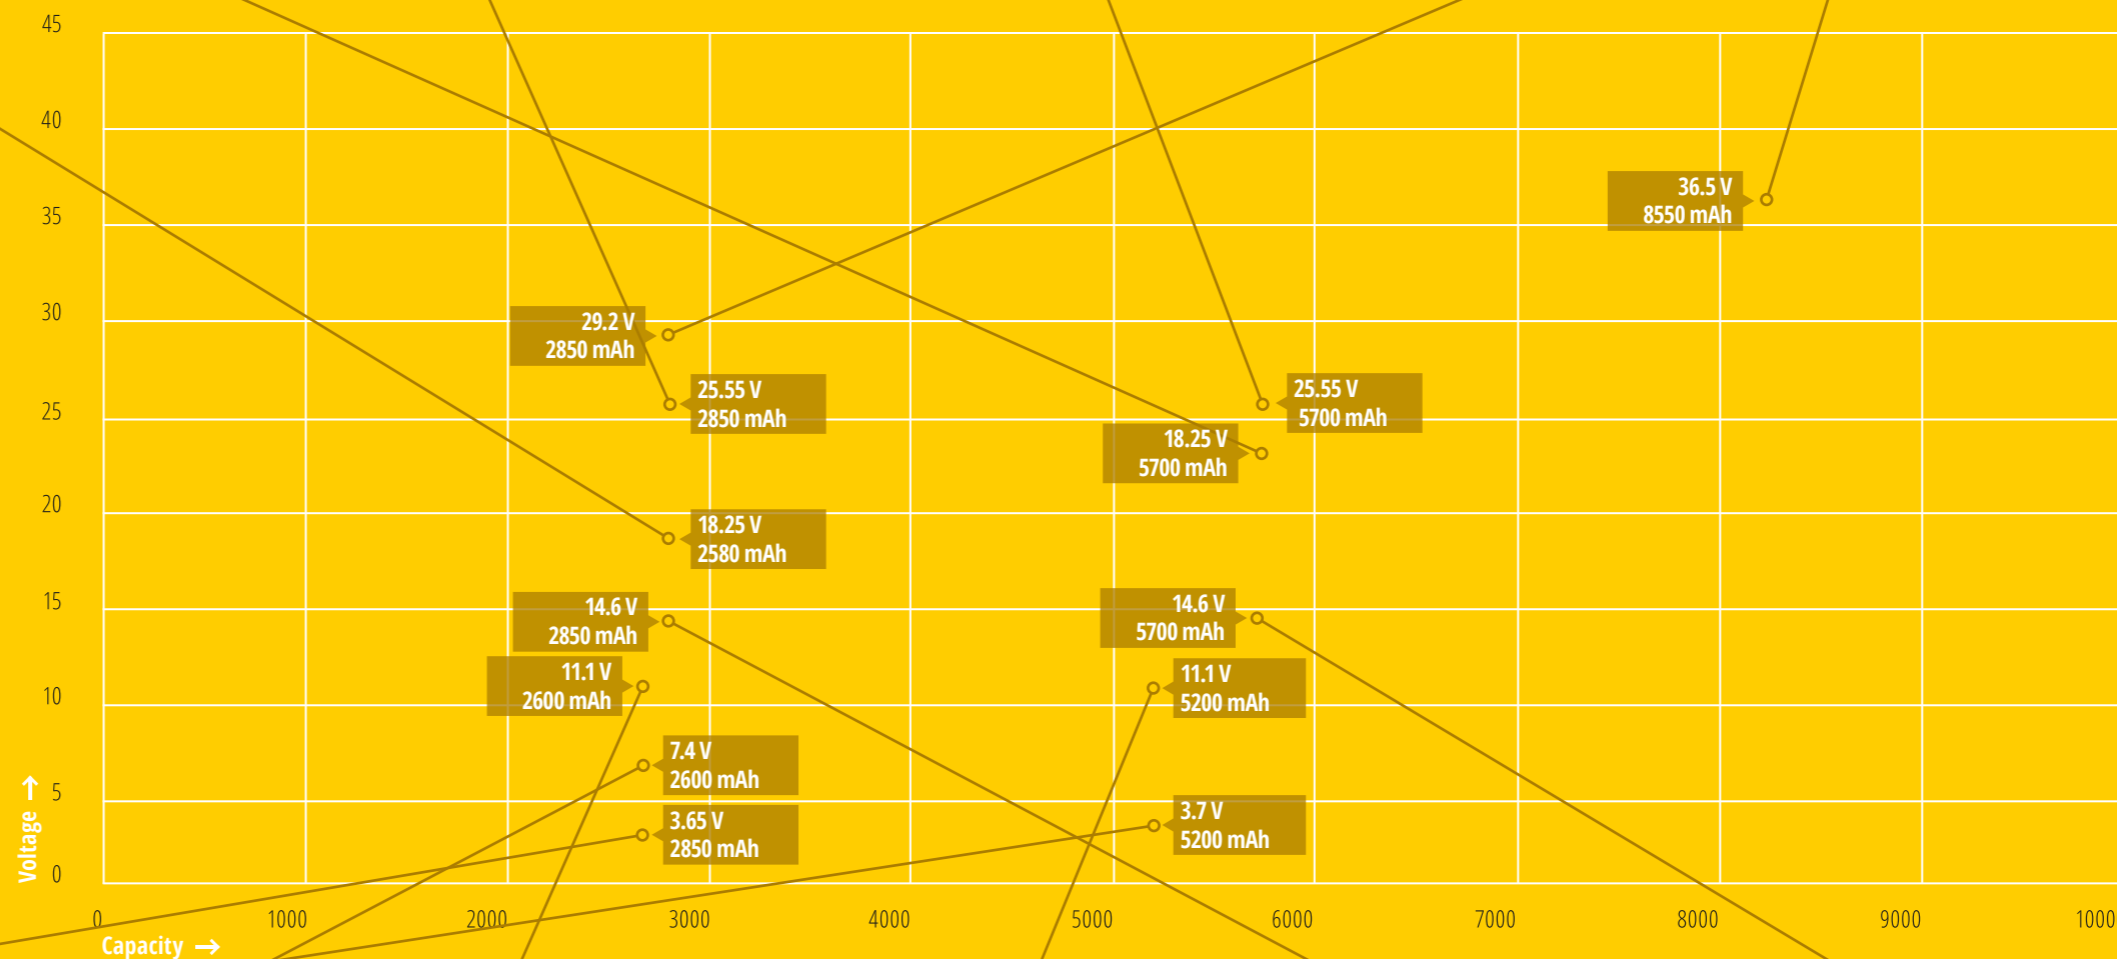

## Battery packs

# SOLUTIONS FROM A SINGLE SOURCE

As a system supplier, FRIWO offers both chargers and battery packs. In addition to our range of standard solutions, we can design and manufacture custom solutions for stationary and mobile applications. And they all carry the "Made in Germany" label.

FRIWO's standard portfolio uses premium cells. Our battery packs are equipped with an appropriate protective circuit, which monitors the charging and discharging process, reducing the stress on cells and significantly extending the life of the pack. FRIWO also offers solutions with active cell balancing, to ensure maximum use of capacity. Combined with FRIWO chargers, this results in an optimally balanced overall system. For an overview of our bundle solutions from the standard portfolio, see page 62/63 of this catalog.


FRIWO offers extensive development expertise for custom solutions. This allows the company to work closely with customers to create application-specific battery packs using cells from various manufacturers. Along with the optimum configuration of cells, we are capable of implementing complex battery management systems (BMS) including a range of communication systems and parameter queries. Among other things, this makes it possible to indicate the "health" of a battery pack or its charge status, or to implement cell authentication. Along with the capacity to develop and manufacture custom solutions, FRIWO has an internal licensing department, which works closely with the relevant authorities to secure the necessary official approvals.

An optimally  
balanced  
overall  
system ...

Medical approvals even for standard battery packs: In addition to the UN38.3 certification (transport of batteries), selected solutions from the FRIWO standard portfolio are now also approved according to IEC 62133, which saves the customer high approval costs and reduces „time to market“ because of the product's availability.



Made in Germany.

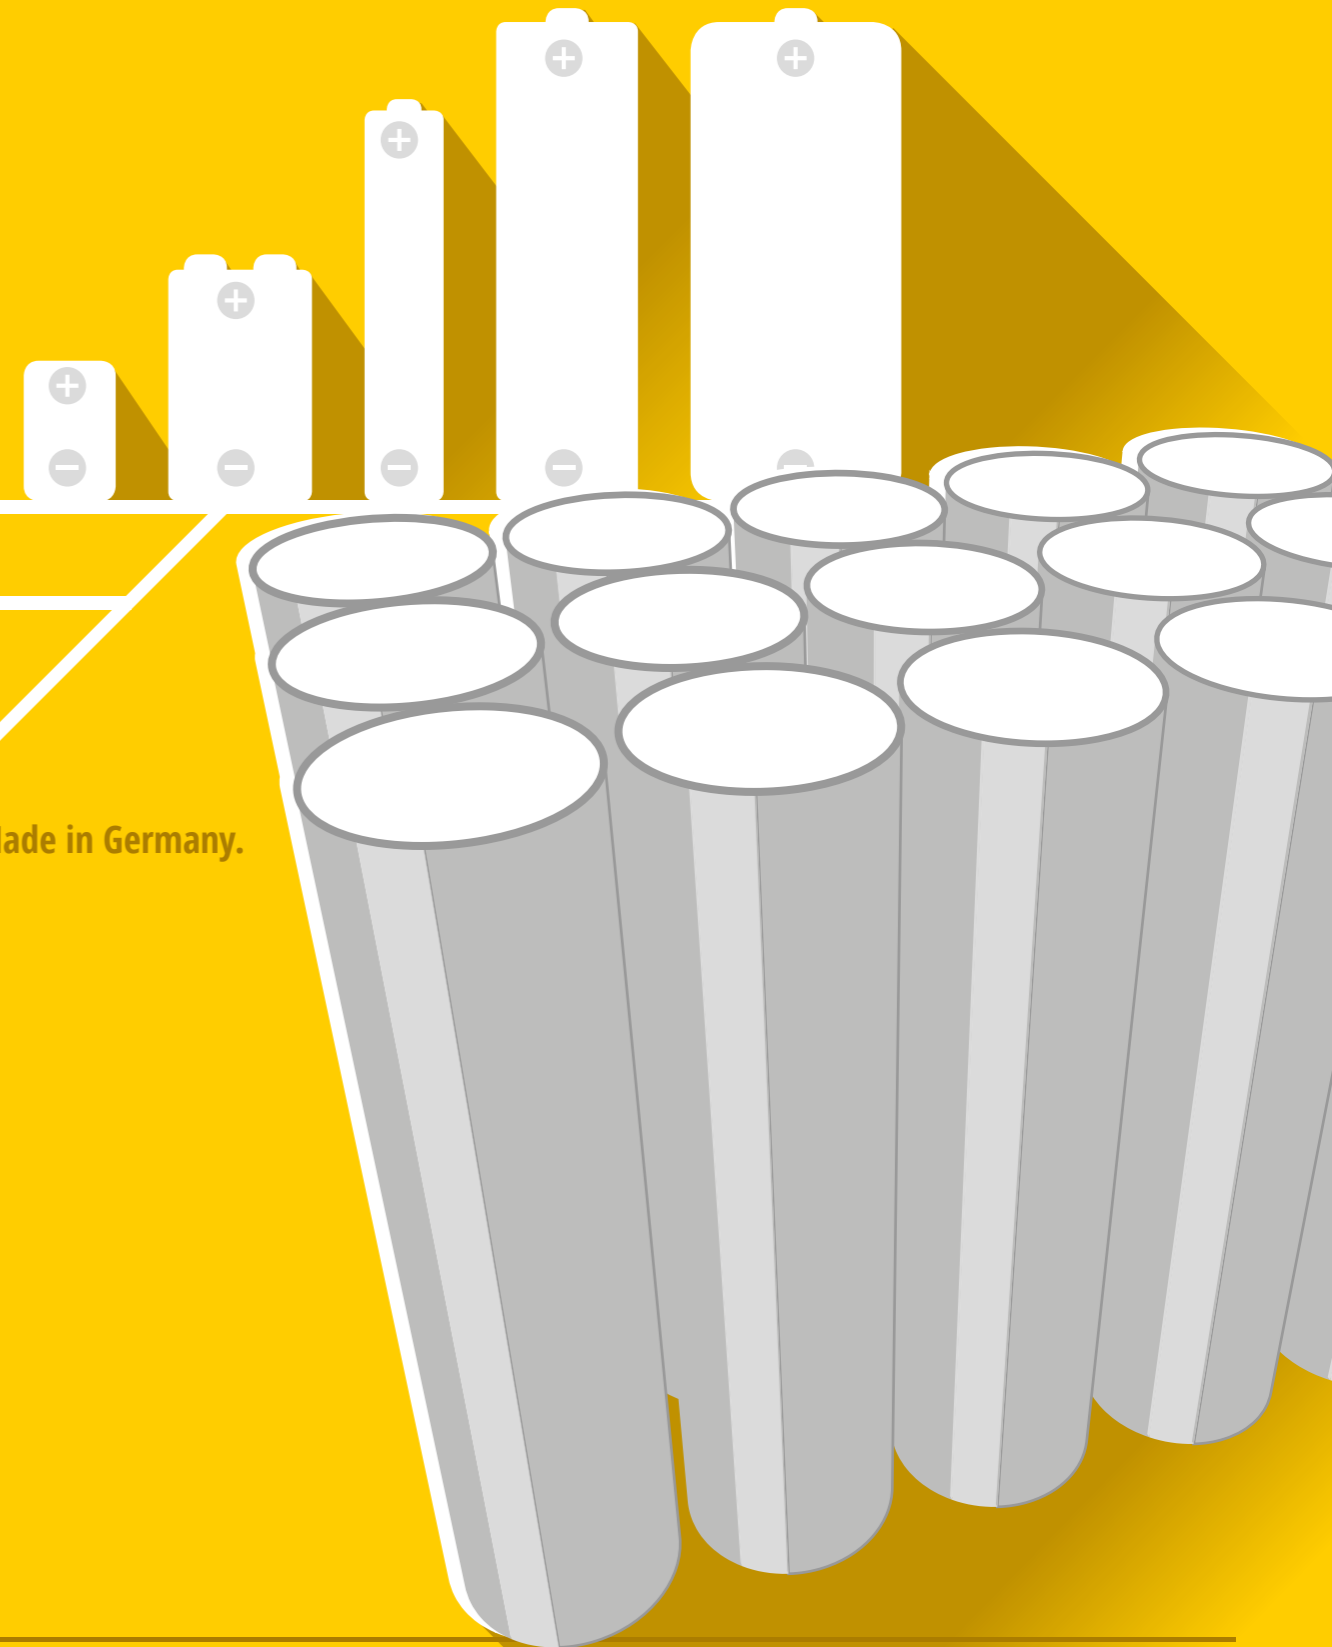



## Battery solutions

**BATTERY PACKS**

Lithium-Ion technology.

All products conform to transport standard UN38.3.

## Technical data

**Cell type** INR-18650-29E  
**Charge voltage** 4.2 V (1S1P, 1S2P),  
 8.4 V (2S1P)

**Charge current** 1300 mA (2S1P),  
 1375 mA (1S1P),  
 2600 mA (1S2P)

**Max. charge current** 2600 mA (2S1P),  
 2750 mA (1S1P),  
 5200 mA (1S2P)

**Discharge current (cont.)** 2600 mA (2S1P),  
 2750 mA (1S1P),  
 5200 mA (1S2PP)

**Discharge voltage** 2.75 V (1S1P, 1S2P),  
 5.5 V (2S1P)

**NTC** 10 K, B=3980  
**Cell balancing** Nein

## Safety specifications

**Normen** IEC62133 (2S1P),  
 UN38.3

## Mechanical data

**Dimensions** 20.0 x 20.0 x 70.0 mm (1S1P),  
 39.0 x 20.0 x 73.0 mm (1S2P, 2S1P)

**Weight** 53 g  
 104 g (Article no. 5500088, 5500130),  
 108 g (Article no. 5500001),  
 303 g (Article no. 5500003)

**Cable length** 200 mm  
**Connctor** JST J300 (Article no. 5500001, 5500002, 5500003, 5500129)  
 Keinen (Article no. 5500173)

**1S1P**

Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 1$  (0.04)  
 All Dimensions in Millimeter (Inch), Deviation  $\pm 1$  (0.04)

## Akku Pack 1S1P

Nominal voltage	Capacity	Connector	Article no.
<b>3.65 V</b>	<b>2850 mAh</b>	<b>Litzen: GND black, NTC yellow, PLUS red</b>	<b>5500173</b>

**1S2P**

Breite / Width: 20 (0.78)  
 Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 0,5$  (0.02)  
 All Dimensions in Millimeter (Inch), Deviation  $\pm 0,5$  (0.02)

## Battery pack 1S2P

Nominal voltage	Capacity	Connector	Article no.
<b>3.7 V</b>	<b>5200 mAh</b>	<b>JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red</b>	<b>5500129</b>
<b>3.7 V</b>	<b>5200 mAh</b>	<b>Wires: GND black, NTC yellow, POSITIVE red</b>	<b>5500130</b>

**2S1P**

Breite / Width: 20 (0.78)  
 Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 0,5$  (0.02)  
 All Dimensions in Millimeter (Inch), Deviation  $\pm 0,5$  (0.02)

## Battery pack 2S1P

Nominal voltage	Capacity	Connector	Article no.
<b>7.4 V</b>	<b>2600 mAh</b>	<b>JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red</b>	<b>5500001</b>
<b>7.4 V</b>	<b>2600 mAh</b>	<b>Wires: GND black, NTC yellow, POSITIVE red</b>	<b>5500088</b>



### Technical data

Cell type	INR18650-29E
Charge voltage	12.6 V (3S1P, 3S2P), 16.8 V (4S1P, 4S2P)
Charge current	1300 mA (3S1P), 1375 mA (4S1P), 2600 mA (3S2P), 2750 mA (4S2P)
Max. charge current	2600 mA (3S1P), 2750 mA (5S1P), 5200 mA (3S2P), 5500 mA (5S2P)
Discharge current (cont.)	2600 mA (3S1P), 2750 mA (4S1P, 4S2P), 5200 mA (3S2P)
Discharge voltage	8.25 V (3S1P, 3S2P), 10.0 V (4S1P, 4S2P)
NTC	10 K, B = 3380 (4S1P, 4S2P)
Cell balancing	3S1P, 3S2P, 4S1P, 4S2P
Safety specifications	
Layout acc. to safety standard	IEC62133 (3S1P, 3S2P, 4S1P), UN38.3
Mechanical data	
Dimensions	57.0 x 20.0 x 73.0 mm (3S1P), 57.0 x 39.0 x 74.0 mm (3S2P), 76.0 x 19.0 x 75.0 mm (4S1P), 76.0 x 38.0 x 75.0 mm (4S2P)
Weight	152 g (article no. 5500089), 156 g (article no. 5500002), 242 g (article no. 5500099), 299 g (article no. 5500090), 303 g (article no. 5500003), 434 g (article no. 5500100)
Cable length	200 mm
Connector	JST J300 (Article no. 5500004, 5500005, 5500099, 5500100)


## Battery solutions

# BATTERY PACKS

Lithium-Ion technology.

All products conform to transport standard UN38.3.



## 3S1P with SMBus interface



Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Battery pack 3S1P			
Nominal voltage	Capacity	Connector	Article no.
11.1 V	2600 mAh	JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red	5500002
11.1 V	2600 mAh	Wires: GND black, NTC yellow, POSITIVE red	5500089


## 3S2P with SMBus interface

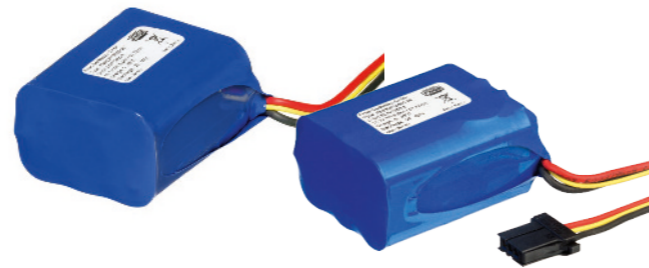

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Battery pack 3S2P			
Nominal voltage	Capacity	Connector	Article no.
11.1 V	5200 mAh	JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red	5500003
11.1 V	5200 mAh	Wires: GND black, NTC yellow, POSITIVE red	5500090


## 4S1P optionally with SMBus interface (article-no. 5500133)

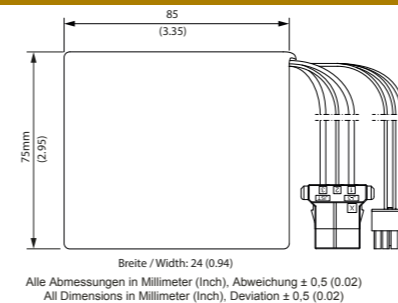

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Battery pack 4S1P			
Nominal voltage	Capacity	Connector	Article no.
14.6 V	2850 mAh	Power: JST Connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red Communication: PIN 1 SMB GND grey, PIN 2 SMBC white, PIN 3 SMBD green, PIN 4 not used	5500099

## 4S2P optionally with SMBus interface (article-no. 5500134)

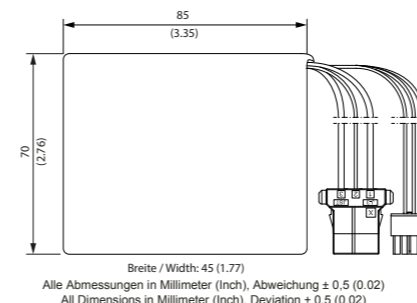

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Battery pack 4S2P			
Nominal voltage	Capacity	Connector	Article no.
14.6 V	5700 mAh	Power: JST Connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red Communication: PIN 1 SMB GND grey, PIN 2 SMBC white, PIN 3 SMBD green, PIN 4 not used	5500100



### Technical data

Cell type	INR18650-29E
Charge voltage	21.0 V (5S1P, 5S2P), 29.4 V (7S1P, 7S2P)
Charge current	1375 mA (5S1P, 5S1P), 2750 mA (5S2P, 7S2P)
Max. charge current	2750 mA (5S1P, 7S1P), 5500 mA (5S2P, 7S2P)
Discharge current (cont.)	2750 mA (5S1P, 7S1P), 5500 mA (5S2P, 7S2P)
Discharge voltage	12.5 V (5S1P, 5S2P), 17.5 V (7S1P, 7S2P)
NTC	10 K, B = 3380 (5S1P, 7S1P), 10 K, B = 3988 (5S2P, 7S2P)
Cell balancing	5S1P, 5S2P, 7S1P, 7S2P

### Safety specifications

Layout acc. safety standard	IEC62133 (5S1P, 5S2P, 7S2P), UN38.3
-----------------------------	--

### Mechanical data

Dimensions	95.0 x 19.0 x 75.0 mm (5S1P), 95.0 x 38.0 x 75.0 mm (5S2P), 74.0 x 36.0 x 75.0 mm (7S1P), 133.0 x 38.0 x 75.0 mm (7S2P)
Weight	248 g (Article no. 5500091), 252 g (Article no. 5500004), 378 g (Article no. 5500093), 528 g (Article no. 5500092), 534 g (Article no. 5500005), 720 g (Article no. 5500094), 724 g (Article no. 5500007)
Cable length	200 mm
Connector	JST J300 (Article no. 5500004, 5500005, 5500006, 5500007)

For notes on connection and safe operation, please refer to the operating instructions.

\*variants without SMBus only



## Battery solutions

# BATTERY PACKS

Lithium-Ion technology.

All products conform to transport standard UN38.3.



## 5S1P optionally with SMBus interface (article-no. 5500133)

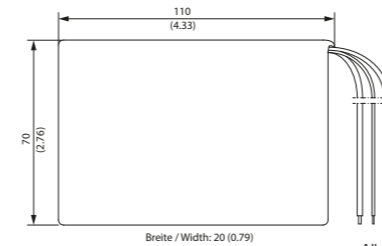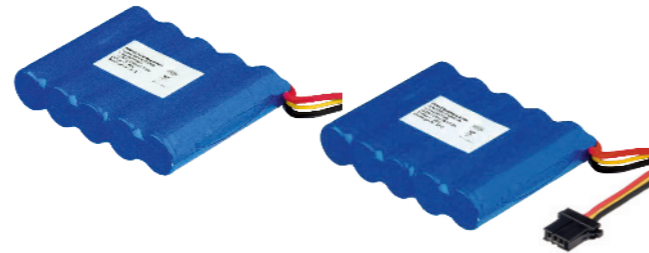

Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 0.5$  (0.02)  
All Dimensions in Millimeter (Inch), Deviation  $\pm 0.5$  (0.02)

Battery pack 5S1P			
Nominal voltage	Capacity	Connector	Article no.
18.25 V	2850 mAh	JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red	5500004
18.25 V	2850 mAh	Wires: GND black, NTC yellow, POSITIVE red	5500091



## 5S2P optionally with SMBus interface (article-no. 5500134)

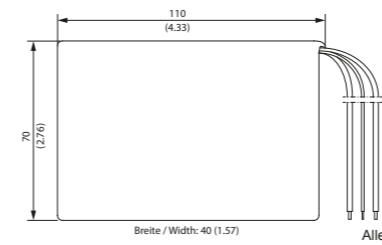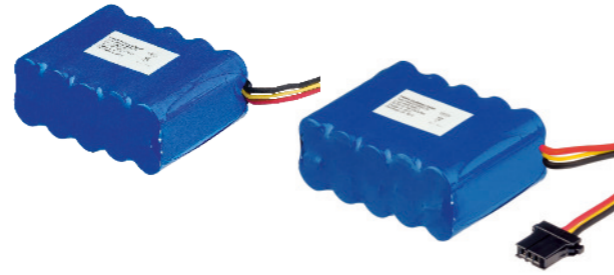

Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 0.5$  (0.02)  
All Dimensions in Millimeter (Inch), Deviation  $\pm 0.5$  (0.02)

Battery pack 5S2P			
Nominal voltage	Capacity	Connector	Article no.
18.25 V	5700 mAh	JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red	5500005
18.25 V	5700 mAh	Wires: GND black, NTC yellow, POSITIVE red	5500092



## 7S1P optionally with SMBus interface (article-no. 5500135)

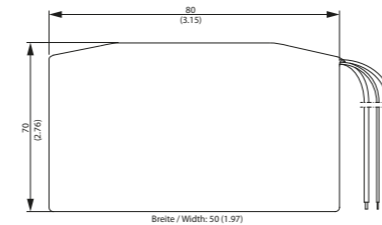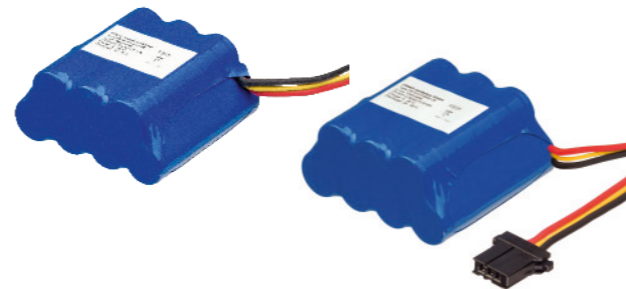

Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 0.5$  (0.02)  
All Dimensions in Millimeter (Inch), Deviation  $\pm 0.5$  (0.02)

Battery pack 7S1P			
Nominal voltage	Capacity	Connector	Article no.
25.55 V	2850 mAh	JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red	5500006
25.55 V	2850 mAh	Wires: GND black, NTC yellow, POSITIVE red	5500093

## 7S2P optionally with SMBus interface (article-no. 5500136)

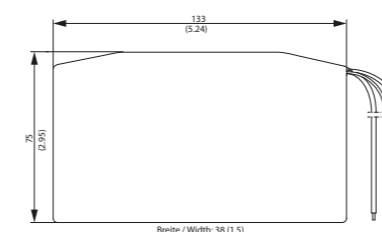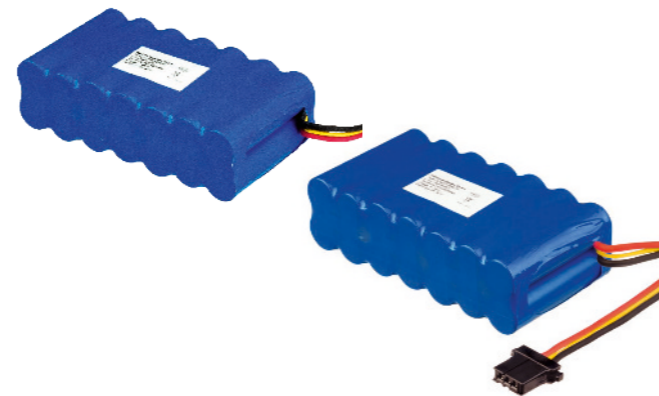

Alle Abmessungen in Millimeter (Inch), Abweichung  $\pm 0.5$  (0.02)  
All Dimensions in Millimeter (Inch), Deviation  $\pm 0.5$  (0.02)

Battery pack 7S2P			
Nominal voltage	Capacity	Connector	Article no.
25.55 V	5700 mAh	JST connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red	5500007
25.55 V	5700 mAh	Wires: GND black, NTC yellow, POSITIVE red	5500094



# BATTERY PACKS

Lithium-Ion technology.

All products conform to transport standard UN38.3.

## Technical data

Cell type	INR18650-29E
Charge voltage	33,6 V (8S1P), 42,0 V (10S3P)
Charge current	1350 mA (8S1P), 4125 mA (10S3P)
Max. charge current	2750 mA (8S1P), 8250 mA (10S3P)
Discharge current (cont.)	2750 mA (8S1P), 8250 mA (10S3P)
Discharge voltage	2750 V (8S1P), 25,0 V (10S3P)
NTC	10 K, B = 3980 (8S1P), 10 K, B = 3988 (10S3P)
Cell balancing	8S2P, 10S3P

## Safety specifications


Layout acc. to safety standard UN38.3

## Mechanical data

Dimensions	85,0 x 42,0 x 70,0 mm (8S1P), 204,0 x 62,0 x 75,0 mm (10S3P)
Weight	383 g (Article no. 5500153), 1592 g (Article no. 5500008)
Cable length	180 – 200 mm
Connector	JST300 (Article no. 5500008, 5500153)

## 8S1P

with SMBus interface

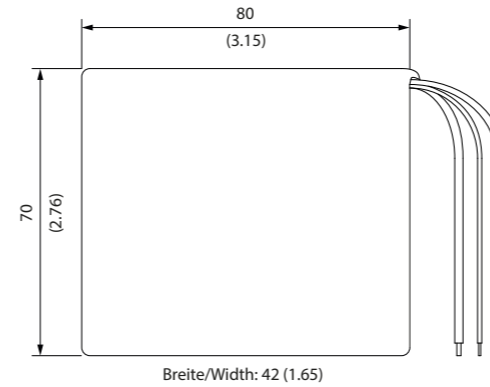


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

### Akku Pack 8S1P

Nominal voltage	Capacity	Connector	Article-no.
29.2 V	2850 mAh	Power: JST Connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red Communication: PIN 1 SMB GND grey, PIN 2 SMBC white, PIN 3 SMBD green, PIN 4 SMB 5V orange	5500153

## 10S3P

optionally with SMBus interface (article-no. 5500136)

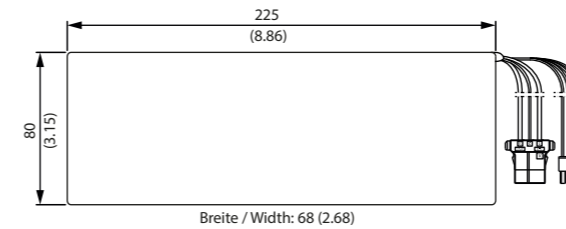

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

### Battery pack 10S3P

Nominal voltage	Capacity	Connector	Article no.
36.5 V	8550 mAh	Power: JST Connector: PIN 1 GND black, PIN 2 NTC yellow, PIN 3 POSITIVE red Communication: PIN 1 SMB GND grey, PIN 2 SMBC white, PIN 3 SMBD green, PIN 4 SMB 5V orange	5500008



LED drivers

## FOR CREATIVE LIGHTING

The FRIWO LED driver series: Custom power supply solutions for your lighting concept. Featuring minimal housing cross sections and a variety of shapes, they offer maximum freedom of design. From flush-mounted drivers that are safe from vandalism to installation in the narrowest casings, FRIWO's standard drivers offer the ideal basis for the creative design of lighting solutions.

FRIWO's LED drivers offer maximum efficiency. LED power supply systems are subject to particular requirements with regard to safety (EN 61347-1/-2-13), EMC (EN 55015) and harmonic current emissions. In compliance with those guidelines, the drivers in the LT range control the power and voltage for a single device.

FRIWO offers a comprehensive LED portfolio, including LED drivers, the DIMMbox and LS12 light control, which offer excellent dimming solutions using DALI, Push-Dim or 1-10V. The LS12 even allows up to 100 LED drivers to be controlled in parallel, and features an additional power supply for external sensors. From safe power supply units to creative light control, FRIWO's modular system allows various components to be combined in a solution that precisely meets your individual needs.



Maximum freedom of design,  
custom power supply systems.

FRIWO's LED power  
supply solutions:  
a comprehensive  
range.

## Platform portfolio

**LED DRIVERS**

All products are  
EN 61347-1 and EN 61347-2-13 approved.

## Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

## Technical data

Input voltage	220 – 240 V, 120 V (LT20-24/833 US)
Frequency	50 – 60 Hz
Inrush current	20000 mA, 17000 mA (LT10-24 UP), 17600 mA (LT10-31 UP)
Leakage current	≤ 250 µA
Output voltage tolerance	± 2 %
Output current tolerance	± 5 %
Efficiency (typ. full load)	≥ 84 %
MTBF	200.000 h*

## Environmental specifications

Operating temperature	-20 – 45° C
Humidity	5 – 95 %
Storage temperature	-40 – 70° C
Operating altitude	2000 m

## Safety specifications

Layout acc. to safety standard EN 61347-1, EN 61347-2-13, UL1310 (LT20-24/833 US),  
UL8750 (LT20-24/833 US)

Safety class	II
EMC	EN 55015, EN 61000-3-2, EN 61547, EN 62384

## Mechanical data

Dimensions	51.0 x 48.0 x 25.0 mm (LT10-12 UP, LT10-24 UP, LT10-36 UP, LT10-36/300 UP), 51.0 x 48.0 x 35.0 mm (LT10-31 UP, LT20 UP), 120.0 x 30.0 x 21.0 mm (LT10), 153.0 x 30.0 x 21.0 mm (LT20)
------------	---


Weight	60 g (LT10), 82 g (LT20), 90 g (LT10-12 UP, LT10-24 UP, LT10-36 UP, LT10-36/300 UP), 125 g (LT10-31 UP, LT20 UP)
--------	---

Connectors	AC input: Wires 2 x 0.75 mm <sup>2</sup> (LT UP), Terminal strips 0.5 - 1.5 mm <sup>2</sup> (LT10, LT20) DC output: 2 x AWG20 (LT UP), Terminal strips 0.5 - 1.5 mm <sup>2</sup> (LT10, LT20)
------------	--

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.


\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

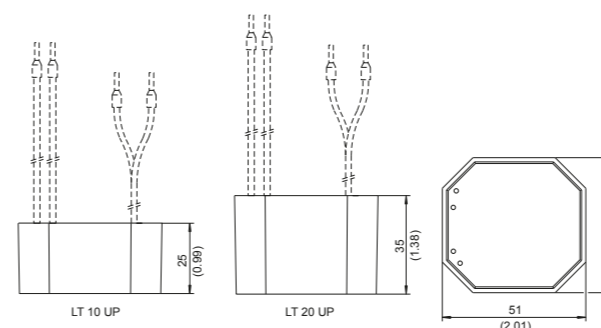**LT UP**

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
LT10-12 UP	8 - 12 V	1000 mA	12 V	0 - 950 mA	1896539
LT10-24 UP	8 - 23.4 V	500 mA	24 V	0 - 475 mA	1896408
LT10-36 UP	8 - 36 V	350 mA	37 V	0 - 325 mA	1895582
LT10-36/300 UP	8 - 36 V	300 mA	37 V	0 - 285 mA	1897066
LT20-24 UP	12 - 24 V	850 mA	24 V	0 - 810 mA	1896409
LT20-31 UP	15 - 30 V	700 mA	31 V	0 - 680 mA	1895583
LT20-36/600 UP	15 - 35 V	600 mA	37 V	0 - 570 mA	1897067

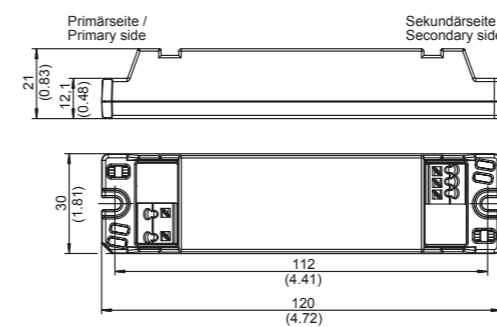
**LT10**

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
LT10-12	1 - 11.4 V	700 mA	12 V	3 - 630 mA	1895611
LT10-16	1 - 15 V	700 mA	16 V	3 - 630 mA	1895089
LT10-24	1 - 22.5 V	550 mA	24 V	3 - 500 mA	1896009
LT10-32	2 - 30 V	350 mA	32 V	3 - 315 mA	1895008
LT10-32 DB**	8 - 31.2 V	350 mA	32 V	0 - 332 mA	1895541
LT10-36/300	8 - 36 V	300 mA	37 V	0 - 285 mA	1897064

\*\* DB = DIMMbox connectivity

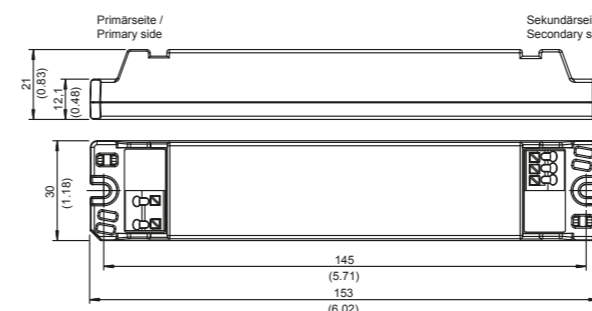**LT20**

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)



Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
LT20-24/833	15 - 23.5 V	833 mA	24 V	0 - 800 mA	1899064
LT20-24/833 US	15 - 23.5 V	833 mA	24 V	0 - 800 mA	1896669
LT20-28/700	7 - 27.5 V	700 mA	28 V	0 - 665 mA	1899069
LT20-28/700 1-10 V	16 - 27.5 V	700 mA	28 V	0 - 665 mA	1897012
LT20-40/500 1-10 V	16 - 39.2 V	500 mA	40 V	0 - 475 mA	1897014
LT20-48/350 1-10 V	20 - 47 V	350 mA	48 V	0 - 332 mA	1897015

\* Standard units will be delivered with highest output voltage / output current.



### Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

### Technical data

<b>Input voltage</b>	220 – 240 V, 100 – 120 V (LT40-24/1250 US)
<b>Frequency</b>	50 – 60 Hz
<b>Inrush current</b>	20000 mA, 24 A
<b>Leakage current</b>	≤ 250 µA, ≤ 500 µA (LT40-24/1250 US)
<b>DALI / PUSH-DIM</b>	264V AC / 50V DC
<b>Output voltage tolerance</b>	± 2 %
<b>Output current tolerance</b>	± 5 %
<b>Stand-by</b>	<0,5W
<b>Efficiency (typ. full load)</b>	≥ 84% (LT40, LT40 WP), ≥ 88% (L50 DALI)
<b>MTBF</b>	200.000 h*

### Environmental specifications

<b>Operating temperature</b>	-20 – 45° C
<b>Humidity</b>	5 – 90 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m

### Safety specifications

<b>Layout acc. to safety standard</b>	EN 61347-1, EN 61347-2-13, UL1310 (LT40-24/1250 US), UL8750 (LT40-24/1250 US)
<b>Safety class</b>	II
<b>EMV</b>	EN 55015, EN 61000-3-2, EN 61547, EN 62384

### Mechanical data

<b>Dimensions</b>	188.0 x 30.0 x 21.0 mm (LT40), 200.0 x 30.0 x 21.0 mm (LT40 WP), 240.0 x 30.0 x 21.0 mm (LT50 DALI)
<b>Weight</b>	106 g (LT40), 130 g (LT50 DALI), 200 g (LT40 WP)
<b>Connectors</b>	AC-Input: Wires 0.5 – 1.5 mm <sup>2</sup> (LT40, LT50 DALI), Terminal stripes H05RN-F, 1 mm <sup>2</sup> , 355 mm Länge (LT40 WP) DC-Output: Wires 0.5 – 1.5 mm <sup>2</sup> (LT40, LT50 DALI), Terminal stripes 2 x 0.5 mm <sup>2</sup> , 180 mm Länge (LT40 WP)

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.


\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## Platform portfolio

# LED DRIVERS


All products are  
EN 61347-1 and EN 61347-2-13 approved.

## LT40

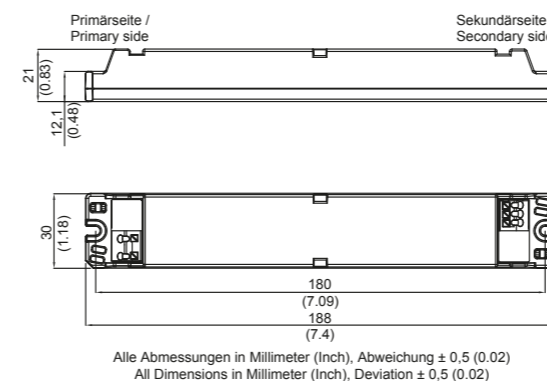


Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
<b>LT40-24/1250 US</b>	<b>10 - 23.5 V</b>	<b>1250 mA</b>	<b>24 V</b>	<b>0 - 1200 mA</b>	<b>1896600</b>
<b>LT40-24/1400</b>	<b>10 - 23.5 V</b>	<b>1400 mA</b>	<b>24 V</b>	<b>0 - 1330 mA</b>	<b>1899083</b>
<b>LT40-24/1460</b>	<b>10 - 23.5 V</b>	<b>1460 mA</b>	<b>24 V</b>	<b>0 - 1400 mA</b>	<b>1899082</b>
<b>LT40-24/1400 1-10 V</b>	<b>15 - 23.5 V</b>	<b>1400 mA</b>	<b>24 V</b>	<b>0 - 1330 mA</b>	<b>1897016</b>
<b>LT40-36/1050 1-10 V</b>	<b>15 - 35.5 V</b>	<b>1050 mA</b>	<b>36 V</b>	<b>0 - 1000 mA</b>	<b>1897017</b>
<b>LT40-48/700 1-10 V</b>	<b>22 - 47 V</b>	<b>700 mA</b>	<b>48 V</b>	<b>0 - 665 mA</b>	<b>1899084</b>

## LT40 WP

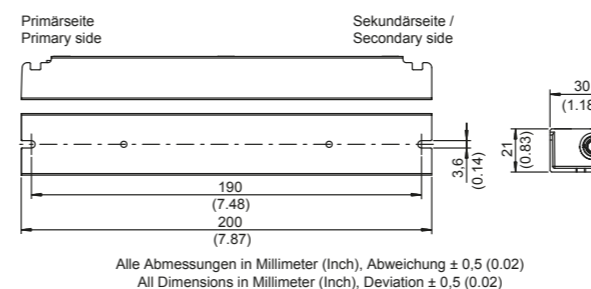

Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
<b>LT40-24 WP</b>	<b>10 - 23.5 V</b>	<b>1400 mA</b>	<b>24 V</b>	<b>0 - 1330 mA</b>	<b>1894660</b>
<b>LT40-36 WP</b>	<b>15 - 35.3 V</b>	<b>1200 mA</b>	<b>36 V</b>	<b>0 - 1000 mA</b>	<b>1894661</b>
<b>LT40-48 WP</b>	<b>22 - 47 V</b>	<b>700 mA</b>	<b>48 V</b>	<b>0 - 665 mA</b>	<b>1894662</b>

## LT50 DALI

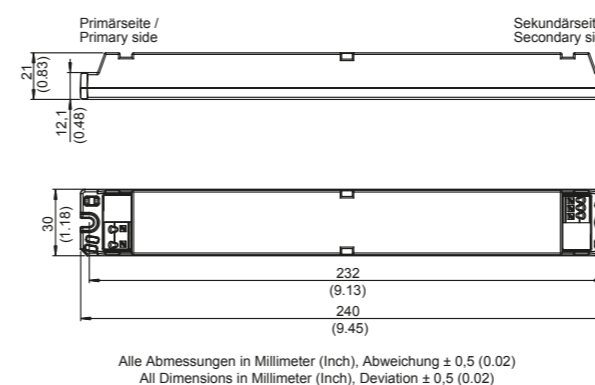

Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
<b>LT50-24/2100 DALI CV</b>	–	–	<b>24 V</b>	<b>0 - 2100 mA</b>	<b>1899313</b>

\* Standard units will be delivered with highest output voltage / output current.



## Platform portfolio

## LED DRIVERS

All products are  
EN 61347-1 and EN 61347-2-13 approved.

## Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

## Technical data

<b>Input voltage</b>	220 – 240 V, 100 – 277 V (LT60-24/2500 WR, LT80-24/3300 WR)
<b>Frequency</b>	50 – 60 Hz
<b>Inrush current</b>	22000 mA (LT60-85/700 1-10 V, LT60-170/350 1-10 V, LT60 SQ), 24000 mA (LT60-24/2500 1-10 V, LT60-36/1600 1-10 V, LT60-48/1200-1-10 V, LT60 DPA), 45000 mA (LT60-24/2500 WR, LT80-24/3300 WR)
<b>Leakage current</b>	≤ 250 µA
<b>Output voltage tolerance</b>	± 2 %
<b>Output current tolerance</b>	± 5 %
<b>Efficiency (typ. full load)</b>	≥ 84 %
<b>MTBF</b>	200.000 h*

## Environmental specifications

<b>Operating temperature</b>	-20 – 45° C
<b>Humidity</b>	5 – 90 %
<b>Storage temperature</b>	-40 – 70° C
<b>Operating altitude</b>	2000 m

## Safety specifications

<b>Layout acc. to safety standard</b>	EN 61347-1, EN 61347-2-13, UL1310 (LT60-24/2500 WR, LT80-24/3300 WR), UL8750 (LT60-24/2500 WR)
<b>Safety class</b>	II
<b>EMC</b>	EN 55015, EN 61000-3-2, EN 61547, EN 62384

## Mechanical data


<b>Dimensions</b>	240.0 x 30.0 x 21.0 mm (LT60), 305.0 x 30.0 x 24.0 mm (LT60-24/2500 WR, LT80-24/3300 WR), 170.0 x 100.0 x 30.0 mm (LT60 DPA)
<b>Weight</b>	130 g (LT60), 185 g (LT60-24/2500 WR, LT80-24/3300 WR), 392 g (LT60 DPA)
<b>Connectors</b>	Terminal strips 0.5 - 1.5 mm <sup>2</sup>

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

## LT60


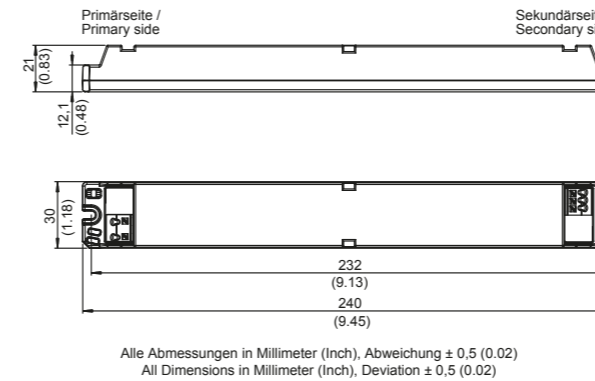


Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
LT60-24/2500 WR***	15 - 23.5 V	2500 mA	24 V	0 - 2375 mA	1898616
LT60-24/2500 1-10 V	15 - 23.5 V	2500 mA	24 V	0 - 2375 mA	1897319
LT60-36/1600 1-10 V	22 - 35 V	1600 mA	36 V	0 - 1520 mA	1897320
LT60-48/1200 1-10 V	30 - 47 V	1200 mA	48 V	0 - 1140 mA	1897304
LT60-85/700 1-10 V	40 - 85 V	700 mA	85 V	0 - 680 mA	1896459
LT60-170/350 1-10 V	100 - 166 V	350 mA	170 V	0 - 330 mA	1896458

\*\* excluding LT60-85/700 1-10 V and LT60-170/350 1-10 V


\*\*\* Housing: see LT100

## LT60 DPA

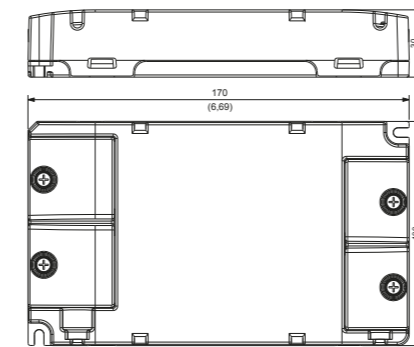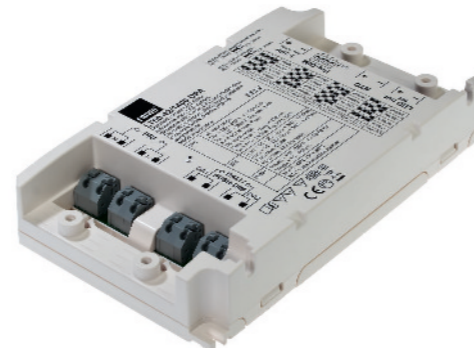

Model	Output data*		Article no.
	Constant current mode (CC)		
	Voltage	Current	
LT60 DPA	18 - 42 V	350 - 1400 mA	1895499

## LT80

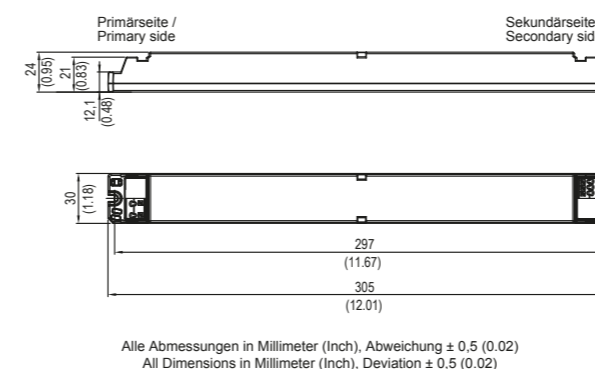

Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
LT80-24/3300 WR	15 - 23.5 V	3300 mA	24 V	0 - 3135 mA	1898618

\* Standard units will be delivered with highest output voltage / output current.





## Platform portfolio

## LED DRIVERS

All products are  
EN 61347-1 and EN 61347-2-13 approved.

## Characteristics

- Overload protection
- Overvoltage protection
- Continuously short circuit proof

## Technical data

Input voltage	220 – 240 V
Frequency	50 – 60 Hz
Inrush current	20000 mA (LT100-142/700 1-10 V, LT100-285/350 1-10 V, LT100-330/300 1-10 V), 34000 mA (LT100-24/4200 1-10 V, LT100-36/2800 1-10 V, LT100-48/2100 1-10 V)
Leakage current	≤ 250 µA
Output voltage tolerance	± 2 %
Output current tolerance	± 5 %
Efficiency (typ. full load)	≥ 84 %
MTBF	200.000 h*

## Environmental specifications

Operating temperature	-20 – 45° C
Humidity	5 – 90 %
Storage temperature	-40 – 70° C
Operating altitude	2000 m


## Safety specifications

Layout acc. to safety standard	EN 61347-1, EN 61347-2-13
Safety class	II
EMC	EN 55015, EN 61000-3-2, EN 61547, EN 62384

## Mechanical data

Dimensions	305.0 x 30.0 x 24.0 mm (LT100), 153.0 x 30.0 x 21.0 mm (DIMMbox, LS12)
Weight	57 g (DIMMbox), 61 g (LS12), 185 g (LT100)
Connectors	Terminal strips 0.5 - 1.5 mm <sup>2</sup>

## LT100

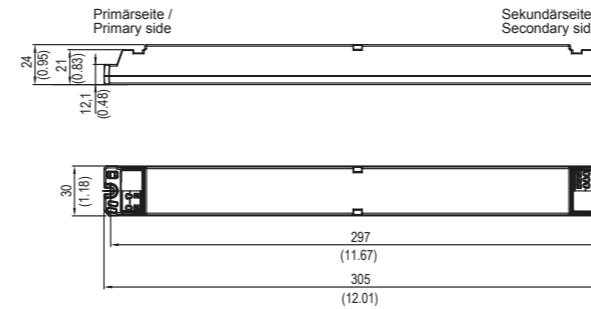


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Model	Output data*				Article no.
	Constant current mode (CC)		Constant voltage mode (CV)		
	Voltage	Current	Voltage	Current	
LT100-24/4200 1-10 V	15 - 23.5 V	4200 mA	24 V	0 - 4000 mA	1897322
LT100-36/2800 1-10 V	22 - 35.5 V	2800 mA	36 V	0 - 2660 mA	1897321
LT100-48/2100 1-10 V	30 - 47 V	2100 mA	48 V	0 - 2000 mA	1897000
LT100-142/700 1-10 V	110 - 136 V	700 mA	142 V	0 - 600 mA	1896461
LT100-285/350 1-10 V	240 - 280 V	350 mA	285 V	0 - 300 mA	1896460
LT100-330/300 1-10 V	250 - 310 V	300 mA	330 V	0 - 257 mA	1896153

\*\* excluding LT100-142/700 1-10 V, LT100-285/350 1-10 V, LT100-330/300 1-10 V

## DIMMbox

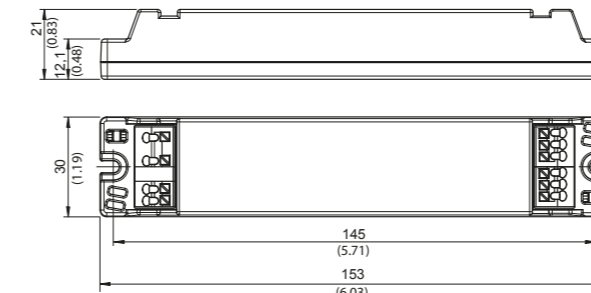

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Model	Output data*		Article no.
	Voltage	Current	
DIMMbox	15 - 50 V	5000 mA	1894848
DIMMbox 1-10 V AUS	15 - 50 V	5000 mA	1896084
DIMMbox CV	15 - 50 V	5000 mA	1897004

## Functional description


The DIMMbox and the connected LED(s) are powered by the power supply / LED driver at the input of the DIMMbox. The dimming function is achieved by pulse width modulation control (PWM) at the LED minus output. Switching frequency is around 600Hz.

DIMMbox: control range 10 – 100 %

DIMMbox 1-10 OFF: control range 10 – 100 %, at an interface voltage between 1 – 10 V / < 0,7 V = off

DIMMbox CV: control range 1 – 100 %, at an interface voltage between 1 – 10 V

## LS12

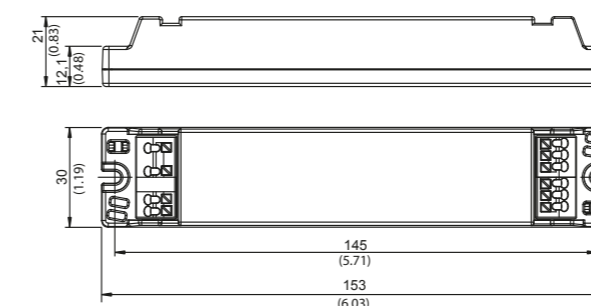

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)



Model	Output data*		Article no.
	Voltage	Current	
LS12/100 DPA	13 V ±1	100 mA	1895885

## Functional description

The light control is a converter for light control signals. An extended 1 – 10 V interface serves as output. For input DALI, PUSH-DIM, a PWM signal or a 1 – 10 V dimmer can be chosen.

The output is synchronized with the FRIWO LED drivers and their integrated 1 – 10 V interface.

\* Standard units will be delivered with highest output voltage / output current.

Please find adapters and accessories on page 86.

For notes on connection and safe operation, please refer to the operating instructions.

\*Mil217F (based on calculations at 120 VAC / 60 Hz & 230 VAC / 50 Hz, ambient temperature 25°C, 100% load)

Standard devices that meet specific needs.



Global availability is not magic – but it's pretty close.

### Accessories

# MORE PRODUCTS, WITH MORE FEATURES

Accessories from FRIWO for power supply units, chargers and LED drivers: A wide range of primary adapters, secondary adapters, power cords and protective covers allow our customers to flexibly enhance the mobility, reliability and availability of their products.

#### Primary adapters

Primary adapters for FRIWO's easy-to-use interchangeable adapter systems allow products to be used globally and can result in considerable reductions in the cost of logistics. The adapters featuring IP42-certified splash protection, which are available from FRIWO for the FOX system, are a particular highlight.

The IEC adapter (IEC320 C8) offers a standard alternative for countries with different power plugs.

#### Secondary adapters

All of FRIWO's standard devices are delivered with a 1.83-meter cable and its tried-and-tested, comprehensive secondary adapter system. A range of easy-to-mount coaxial and jack connectors makes the system extremely flexible for use in a wide range of applications. The required polarity can be achieved by reversing the secondary connector. Custom cables can also be installed.

#### Power cords

Together with the DT range and the FOX and GPP interchangeable adapter system from FRIWO, power cords with the IEC320 C7 power plug offer the right solution for every country. All power cords are 2 meters long and suitable for use with the appropriate IEC320 C8 socket.

#### Protective covers for LED drivers

Protective covers for the LT range from FRIWO offer an easy way to permanently install LED drivers and light control units, while also protecting their electrical contacts.





# ACCESSORIES

## Primary adapters

The easy-to-use, interchangeable primary adapters for FRIWO's adapter systems make it possible to use products globally and can result in considerable reductions in the cost of logistics. The company's IP42 splash-proof adapters featuring IP42-certified splash protection, which are available from FRIWO for the FOX system, are a particular highlight. The IEC adapter (IEC320 C8) offers a standard alternative for countries with different power plugs. The UK adapters are conform to British Standard BS 1363.



## FOX system

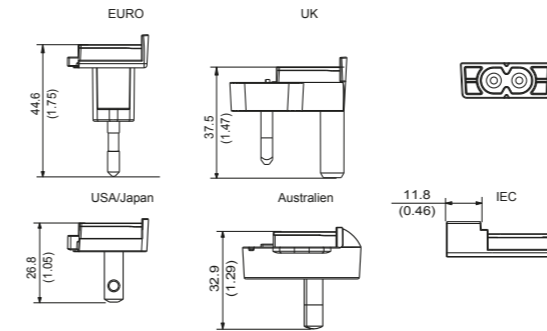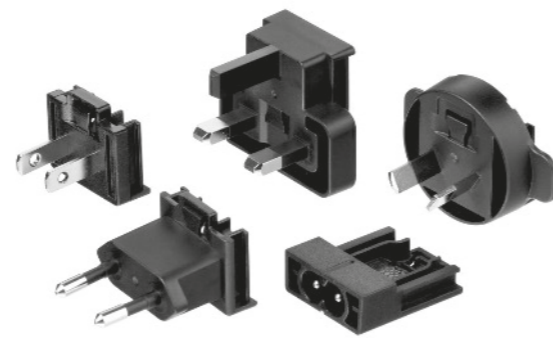

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

FOX	black		white	FOX	IPx0
	IPx0	IPx2	IPx0		
Land	Article no.	Article no.	Article no.	Country	Article no.
<b>EURO</b>	<b>1847556</b>	<b>1847618</b>	<b>1841531</b>	<b>BRA</b>	<b>1847551</b>
<b>UK</b>	<b>1847544</b>	<b>1847606</b>	<b>1847543</b>	<b>CHN</b>	<b>1847550</b>
<b>USA / JPN</b>	<b>1847554</b>	<b>1847604</b>	<b>1847533</b>	<b>IND 2-polig</b>	<b>1847547</b>
<b>AUS</b>	<b>1847553</b>	<b>1847624</b>	<b>1847534</b>	<b>IND 3-polig</b>	<b>1847546</b>
<b>IEC</b>	<b>1847552</b>	–	<b>1847535</b>	<b>KOR</b>	<b>1847545</b>
<b>ARG</b>	<b>1847548</b>	–	–	<b>ZAF</b>	<b>1847549</b>

## GPP system

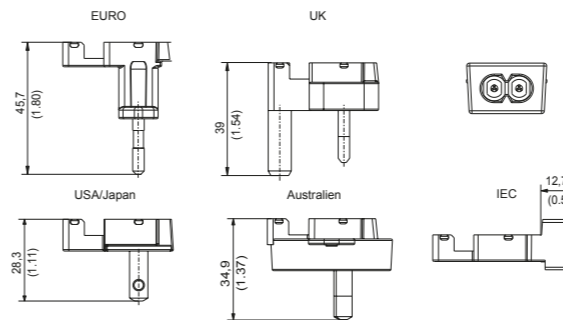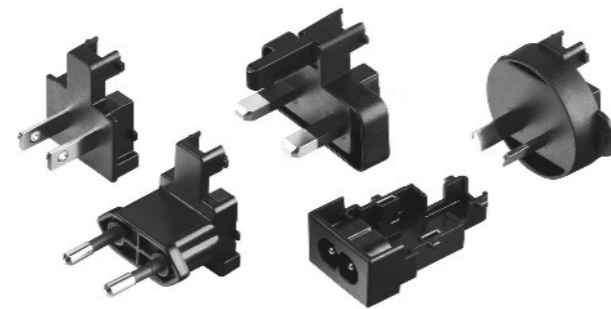


Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

GPP			
Country	Article no.	Country	Article no.
<b>EURO</b>	<b>1827417</b>	<b>BRA</b>	<b>1835621</b>
<b>UK</b>	<b>1827420</b>	<b>CHN</b>	<b>1835620</b>
<b>USA / JPN</b>	<b>1827422</b>	<b>IND</b>	<b>1831323</b>
<b>AUS</b>	<b>1827425</b>	<b>KOR</b>	<b>1835619</b>
<b>IEC</b>	<b>1827428</b>	<b>ZAF</b>	<b>1838236</b>
<b>ARG</b>	<b>1831610</b>		

## Power cords

Together with our DT range and the FOX and GPP interchangeable adapter systems, power cords with the IEC320 C7 power plug offer the right solution for every country. All power cords are 2 meters long and suitable for use with the appropriate IEC320 C8 socket. The UK power cord is conform to British Standard BS 1363.

## Power cords

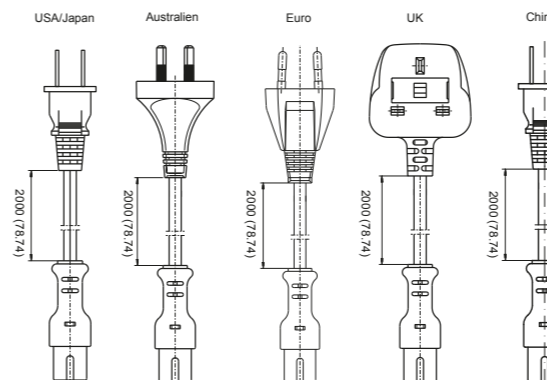

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0.5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0.5 (0.02)

Power cords			
Country	Article no.	Country	Article no.
<b>EURO</b>	<b>1812274</b>	<b>AUS</b>	<b>1812277</b>
<b>UK</b>	<b>1812275</b>	<b>CHN</b>	<b>1843276</b>
<b>USA / JPN</b>	<b>1812276</b>		



# ACCESSORIES

## Secondary adapters

All of FRIWO's standard devices are delivered with a 1.83-meter round cable and its tried-and-tested, comprehensive secondary adapter system. A range of easy-to-mount coaxial and jack connectors makes the system extremely flexible for use in a wide range of applications. The required polarity can be achieved by reversing the secondary connector. Custom cables can also be installed. Our experts are always happy to help you choose what you need.

## Secondary adapter system




Straight coaxial connectors				Angled coaxial connectors				Straight jack connectors			Connectors / Sockets	
Ø out.	Ø in.	Length mm	Article no.	Ø out.	Ø in.	Length mm	Article no.	Ø out.	Length mm	Article no.	Model	Article no.
3.5	1.3	9.5	1807699	3.5	1.3	9.5	1822478	2.5	13	1807704	Texas connector	
4.0	1.7	9.5	1822557	4.0	1.7	9.5	1822558	3.5	14	1807705	Straight Texas connector	1807706
4.0	1.7	11.0	1811994	4.0	1.7	11.0	1822482				Angled Texas connector	1822486
4.8	1.7	9.5	1822559	4.8	1.7	9.5	1822560					
5.5	2.1	9.5	1807700	5.5	2.1	9.5	1822479	Angled jack connectors			Texas sockets 2-pin	
5.5	2.1	11.5	1807701	5.5	2.1	11.5	1822480	Ø out.	Length mm	Article no.	Snap-in type	1323938
5.5	2.1	14.0	1807697	5.5	2.1	14.0	1822476	2.5	13	1822484	PCB type	1321609
5.5	2.5	9.5	1807698	5.5	2.5	9.5	1822477	3.5	14	1822485		
5.5	2.5	11.5	1807702	5.5	2.5	11.5	1822481				Texas sockets 3-pin	
5.5	3.3	9.5	1822561	5.5	3.3	9.5	1822562				Snap-in type	1327259
DIN 45323			1807703	DIN 45323			1822483				PCB type	1363506

## LT protective covers


Protective covers for the LT range from FRIWO offer an easy way to permanently install LED drivers and light control units, while also protecting their electrical contacts.

## Protective covers for LED drivers


Protective covers		Protective covers		Protective covers	
Model	Article no.	Model	Article no.	Model	Article no.
<b>LT Cap</b>	<b>1839772</b>	<b>LT Cap Slim</b>	<b>1844170</b>	<b>LT Cap Slim Short</b>	<b>1896330</b>
For LT10, LT20, LT40, LT50 DALI, LT60, LT80, LT100, DIMMbox and LS12		For LT10, LT20, LT40, LT50 DALI, LT60, LT80, LT100, DIMMbox and LS12		For LT10, LT20, LT40, LT50 DALI, LT60, LT80, LT100, DIMMbox and LS12	

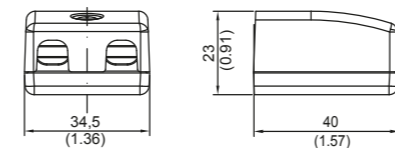

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

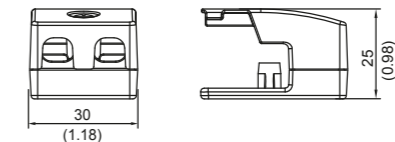

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)

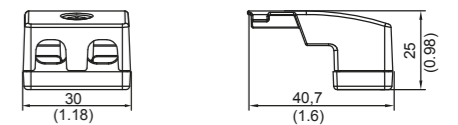

Alle Abmessungen in Millimeter (Inch), Abweichung ± 0,5 (0.02)  
All Dimensions in Millimeter (Inch), Deviation ± 0,5 (0.02)





From experi-  
enced users to  
those starting  
a new career:  
Welcome!



FRIWO Academy

## THOSE WHO CAN, DO



Power supply units, starting with the invention of the world's first AC adapter in 1971: FRIWO shares its extensive experience with customers and partners. The FRIWO Academy regularly gives developers, buyers, technicians and product managers the opportunity to learn more about basics, trends and innovations in the field of performance electronics.

**Access to comprehensive specialist  
knowledge and the latest technologies.**

By doing so, the company offers participants access to its comprehensive specialist knowledge and the latest technologies. The FRIWO Academy relies on small seminar groups to create the most effective learning environment possible. From experienced users to those starting a new career, everyone is welcome to come and learn from our experts in a pleasant atmosphere. Depending on the topic, FRIWO complements its team of experts with selected external specialists, adding even more value to the seminars, with presentations and training exercises.

An example seminar: "Fundamentals of battery and charging technology." In this one-day training course, FRIWO's experts explain the fundamental principles of lithium-ion power storage solutions, with support from TÜV Süd. Along with conveying basic information about battery and charger technology, the course also addresses licensing, guidelines and certification, storage and transport conditions, battery management systems and inductive charging concepts.

Battery type	Lead Acid	NiCd	NiMH	Li-Ion cobalt manganese	LiFePO <sub>4</sub>
Cell voltage	2.0 V	1.2 V	1.2 V	3.6 resp. 3.7 V	3.3 V
Energy density (Wh/kg)	30 – 50	45 – 80	60 – 120	110 – 190 110 – 120	90 – 130
Self-discharge ratio per month	5 %	20 %	30 %	2 – 5 %	2 – 5 %
Overload tolerance	high	moderate	low	very low	very low
Charging cycles	200 – 400	1500	300 – 500	300 – 500	1000 – 2000
Charging method	U = const.	I = const.	I = const.	U = const.	U = const.
Charging characteristic	IU0U, IU1a	I0I	I0I	IUa	IUa
	Phase 1: constant current	Charging criteria: dV, dT/dt, dU/dt, T <sub>max</sub>		Phase 1: constant current	Phase 1: constant current
	Phase 2: constant voltage	Identification and control via microcontroller		Phase 2: constant voltage ±1% tolerance	Phase 2: constant voltage ±1% tolerance
	Phase 3: trickle charge				

### Abbreviations

DT	= Desktop
E <sup>2</sup> MS	= Electronic Engineering & Manufacturing Services
FOX	= FRIWO One-Click Xchange
GPP	= Global Power Plug
LED	= Light Emitting Diode
LT	= LED Driver
OF	= Open Frame
PP	= Power Plug
SMD	= Surface-Mounted Device
UP	= In-wall
USB	= Universal Serial Bus

### Cell chemistries

Li-Ion	= Lithium Ion
LiFePO <sub>4</sub>	= Lithium Iron Phosphate
NiCd	= Nickel Cadmium
NiMH	= Nickel Metal Hydride
Pb	= Lead Acid

### Ambient temperature

Temperature of inactive air which surrounds the power supply. It is usually measured approx. 10 mm apart from the running power supply.

### Class B

Protection against electric shock in due consideration of the leakage current.

### Class BF

Like class B, but taking into account the so-called „F parts“ which may accidentally come into contact with the patient and which are isolated from other parts.

### Class CF

Class with the highest protection.

### Continuously Short Circuit Proof

A short circuit might occur without damaging the output. As soon as the problem is solved, the output will return to normal service.

### Current limited

Electronic overload protection which limits the maximum output current to a preset value.

### Efficiency

Efficiency is calculated as the ratio of output to input power and is always smaller than 1. To reduce the power loss under the given load prerequisites, the maximum efficiency ratio is aspired. For a power supply it is measured at full load and at nominal input. The difference between input and output is transposed into heat, hence each increase of the efficiency ratio means less thermal stress on the components and therefore a life-cycle increase. Even a minor improvement of the efficiency ratio can have a dramatic impact on the life-cycle.

# GLOSSARY

Standards	Office / IT	Medical	Tools, chargers, toys, household appliances	EMC	Surge	Burst
EU	EN 60950-1	EN 60601-1	EN 60335-1	EN 61000 / EN 55014	EN 61000-4-4	EN 61000-4-5
USA	UL 60950-1	UL 60601-1	UL 1310 / E 60335 / UL 697	FCC 47 Teil 15 / EN 61000	EN 61000-4-4	EN 61000-4-5
Canada	C22.2 No. 60950-1	C22.2 No. 60601-1- M90	C22.2 No. 223-M 91 C22.2 No. 173-M 1983 (Toys)	FCC 47 Teil 15 / EN 61000	EN 61000-4-4	EN 61000-4-5
China	GB 4943	GB 9706.1	GB 4706	GB 4343.1	GB/T 17626.4	GB/T 17626.5

### EMC

The ability of electrical equipment to function satisfactorily in its electro-magnetic environment without negative interferences. Power supplies should meet at least two generic standards for EMC:

1. standard for transient emissions (grid-bound interferences emitted by the power supply) and
  2. standard for interference immunity (protection against external interferences)
- These generic standards comprise a multitude of sub-standards that define threshold values for subdomains (for example certain types of interferences). FRIWO power supplies meet these standards to a higher degree than required to make the most of EMC, and to safeguard a trouble-free service.

### Leakage current

A current that flows through the ground when a device is in operation. It flows above capacity and the insulation resistance of an operating circuit over the protective ground conductor of a device.

### Life-cycle

Life-cycle of a power supply. After the end of life power supplies are likely to break down because of worn components.

### MTBF

MTBF stands for Mean Time Between Failures (Average time between two consecutive device failures). The MTBF indicates when a device fails on average due to processing or component defects before signs of wear set in.

### NTC

A temperature-sensitive resistor with negative coefficient which reduces the resistance as temperature increases. It is therefore also called thermistor. It serves not only the temperature monitoring but also limits the inrush current of power supplies.

### Operating temperature

Temperature of still air surrounding the device. It is usually measured approx. 10 mm next to the operated device.

### Overvoltage resistance

A circuitry within the power supplies monitors the output. If a preset threshold value is exceeded, the power supply will be turned off.

### Short circuit proof

Short circuit proof means that a temporary short circuit can be absorbed without damage.

### Single range

Power supplies with single input voltage for the use in the respective countries.

### SMT

SMT is a surface mount technology which allows surface mountable components with solderable pads (without wire connectors) to be soldered directly onto a PCB.

### Standby losses

Power consumption of a power supply during idle service.

### Storage temperature

Temperature range in which a device may be stored (not operated) without being damaged.

### THT

Stands for „through-hole technology“. Wired components are connected to the PCB by vias and connected by a special THT soldering process.

### Voltage controlled

A control loop in the power supply stabilizes the output voltage, independent of all factors (e.g. temperature).

### Wide range

Power supplies with wide range input can be operated at different nominal voltages without having to be adjusted (manually or automatically).

## Europe Germany

### FRIWO Gerätebau GmbH

Von-Liebig-Straße 11 · 48346 Ostbevern  
Tel.: +49 2532 81-0 · Fax: +49 2532 81 112  
sales@friwo.com · www.friwo.com

### Sales office Southern Germany

Mollenbachstraße 14 · 71229 Leonberg  
Tel.: +49 71 52 50 71 701  
Fax: +49 71 52 50 71 699  
sales@friwo.com · www.friwo.com

## Asien China

### FRIWO Power Solutions

#### Technology (ShenZhen) Co. Ltd.

7th. Flr., Building B, FeiYang Plant Zone,  
No. 8 LongChang Rd., 67th BaoCheng,  
Bao An District, Shenzhen  
Postcode: 518101  
Tel.: +86 755 33 26 02 30 · Fax: +86 755 33 26 02 60  
sales@friwo.com · www.friwo.com

## Vietnam

### FRIWO Vietnam Co. Ltd.

Addr. Lot 240, Street No. 12, Amata Industrial Zone,  
Bien Hoa City, Dong Nai Province,  
Postcode: 810000  
Tel.: +84 61 3891 170 · www.friwo.com

## Agencies / Distributors Europa

### AUSTRIA

#### LED distribution:

#### Neumüller Elektronik GmbH

Gewerbegebiet Ost 7  
91085 Weisendorf, Deutschland  
Tel.: +49 91 35 736 66 0 · Fax: +49 91 35 736 66 60  
info@neumueller.com · www.neumueller.com

### BELGIUM

#### Alcom electronics NV / SA

Singel 3  
2550 Kontich  
Tel.: +32 3 458 30 33 · Fax: +32 3 458 31 26  
info@alcom.be · www.alcom.be

### Elipse NV

Wijtschotbaan 5  
2900 Schoten  
Tel.: +32 (0)3 35 45 18 0  
info@elipse.com · www.elipse.com

### FINLAND

#### Oy Flinkenber Ab

Mikkelänkallio 3  
02771 Espoo  
Tel.: +358 98 599 11 · Fax: +358 98 599 13 06  
electronics@flinkenber.fi · www.flinkenber.fi

### FRANCE

#### CATS S. A. S.

19 avenue de Norvège - BP342  
Villebon Sur Yvette  
91958 Courtaboeuf Cedex  
Tel.: +33 (0) 1 69 07 08 24  
Fax: +33 (0) 1 69 07 17 23  
friwo@cats-france.fr · www.cats-france.fr

### GERMANY

#### Northern Germany:

#### Schroeter electronic

Handelsgesellschaft mbH  
Saseler Bogen 1  
22393 Hamburg  
Tel.: +49 40 60 00 06 0 · Fax: +49 40 60 00 06 30  
info@schroeter-electronic-gmbh.de  
www.schroeter-electronic-gmbh.de

#### LED distribution:

#### Neumüller Elektronik GmbH

Gewerbegebiet Ost 7  
91085 Weisendorf  
Tel.: +49 91 35 736 66 0 · Fax: +49 91 35 736 66 60  
info@neumueller.com · www.neumueller.com

### IRELAND

#### Eltech Ltd.

The Rubicon Centre  
CIT Campus  
Bishopstown  
Cork  
Tel.: +353 21 420 90 24 · Fax: +353 21 420 90 91  
pcorkery@eltechireland.com

### ISRAEL

#### Tamuz Electronics Ltd.

3 Hayozma St. Industrial Zone  
P.O. Box 7124  
4464102 Kfar-Saba  
Tel.: +972 9 76 33 000 · Fax: +972 9 76 33 011  
info@tamuz-ele.com · www.tamuz-ele.com

### ITALY

#### ELSAP SPA

Viale Famagosta, 61  
20142 Milano  
Tel.: +39 02 89 12 52 72 · Fax: +39 02 89 12 53 04  
fbenedetti@elsap.it · www.elsap.it

# FRIWO WORLDWIDE / SALES

### NETHERLANDS

#### Alcom Electronics B.V.

Rivium 1e straat 52  
2909 LE Capelle a/d IJssel  
Tel.: +31 10 288 25 00 · Fax: +31 10 288 25 25  
info@alcom.nl · www.alcom.nl

### Elipse NV

Wijtschotbaan 5  
2900 Schoten, Belgium  
Tel.: +32 (0)3 35 45 18 0  
info@elipse.com · www.elipse.com

### POLAND

#### Elhurt Spółka z o.o.

ul. Galaktyczna 35A  
80-299 Gdańsk  
Tel.: +48 58 554 08 00 · Fax: +48 58 554 08 07  
elhurt@elhurt.com.pl · www.elhurt.com.pl

### RUSSIA

#### Eltech Ltd.

Ploschad Konstitutsii 3A  
196247 Sankt Petersburg  
Tel.: +7 812 327 90 90 · Fax: +7 812 635 50 70  
friwo@eltech.spb.ru · www.eltech.spb.ru

### SCANDINAVIA

#### AWILCO

Yderholmvej 64  
4623 Lille Skensved  
Dänemark  
Tel.: +45 56 56 55 00 · Fax: +45 56 56 55 05  
mail@awilco.dk · www.awilco.dk

### SLOVAKIA, HUNGARY, CZECHIA, ROMANIA

#### SOS electronic s.r.o.

Pri prachárni 16  
040 11 Košice  
Slowakei  
Tel.: +421 55 786 04 15 · Fax: +421 55 786 04 45  
info@sos.sk · www.soselectronic.sk

### SLOVENIA

#### IC Elektronika d.o.o.

Vodovodna cesta 100  
1000 Ljubljana  
Tel.: +386 15 68 01 10 · Fax: +386 15 68 91 07  
info@ic-elect.si · www.ic-elect.si

### SPAIN / PORTUGAL

#### Matrix Electrónica, S.L.

C / Alejandro Sanchez, 109  
28019 Madrid  
Tel.: +34 91 56 02 737 · Fax: +34 91 56 28 65  
matrix@matrix.es · www.matrix.es

### SWITZERLAND

#### NOVITRONIC AG

Thurgauerstrasse 74  
8050 Zürich  
Tel.: +41 44 306 91 73 · Fax: +41 44 306 91 03  
energietechnik@novitronic.ch · www.novitronic.ch

### TURKEY

#### RADEL ELEKTRONİK DIŞ TİCARET VE SANAYİ A.Ş.

Necatibey Cadessi No. 81  
Karaköy / Istanbul  
Tel.: +90 21 22 93 84 16 · Fax: +90 21 22 93 74 43  
arisy@superonline.com

### UNITED KINGDOM

#### Haredata Electronics

Unit 6 Stoneacre,  
Grimbald Crag Close,  
St. James Business Park,  
Knaresborough, North Yorkshire, HG5 8PJ  
Tel.: +44 14 23 79 62 40 · Fax: +44 14 23 79 62 49  
sales@haredata.co.uk  
www.haredata.co.uk · www.leddriversuk.com

## Distributors North America

### USA / CANADA

#### Arrow Electronics

9201 East Dry Creek Rd  
Centennial, CO 80112  
Tel.: US/CA: +1 855 326 4757  
Tel.: EU: +800 8000 1010  
leadteam@arrow.com  
www.arrow.com

#### Components Center

3351 Edward Avenue  
Santa Clara, CA 95054  
Tel.: +1 800 776 08 10 · Fax: +1 408 988 69 31  
e-sales@componentscenter.com  
www.componentscenter.com

#### Components Center

11208 Young River  
Fountain Valley, CA 92708  
Tel.: +1 800 598 04 33 · Fax: +1 714 557 73 90  
e-sales@componentscenter.com  
www.componentscenter.com

#### Dalis Electronics

3801 E. Roeser Road, #20  
Phoenix, AZ 85040  
Tel.: +1 800 888 14 08 · Fax: +1 602 275 05 78  
sales@daliselectronics.com  
www.daliselectronics.com

#### Future Electronics

237 Hymus Blvd.  
Pointe-Claire, Quebec H9R 50  
Tel.: +1 514 694 77 10 · Fax: +1 514 695 37 07  
eService@futureelectronics.com  
www.futureelectronics.com

#### Vale Distribution

2 Linda Lane, Suite B  
Vincentown, NJ 08088  
Tel.: +1 800 606 82 53 · Fax: +1 609 859 87 59  
alan@valedistro.com  
www.valedistro.com







**FRIWO Gerätebau GmbH**  
Von-Liebig-Straße 11 · 48346 Ostbevern · Germany  
Tel.: +49 2532 81-0 · [www.friwo.com](http://www.friwo.com)